

- NOTES:**
1. CONTRACTOR SITE ACCESS LOCATIONS ARE SECURITY CONTROLLED ACCESS POINTS. MAIN ACCESS FOR ALL CONTRACTOR EQUIPMENT AND PERSONNEL IS AT EAST MARGINAL WAY ENTRANCE NEAR 16TH AVE SOUTH.
 2. GEORGETOWN STEAM PLANT DRIVEWAY AND PARKING AREA SHALL BE KEPT CLEAR AT ALL TIMES. MAXIMUM VEHICLE/MACHINE SPEED THROUGH THIS AREA IS 10 MPH.
 3. PROPERTY AND EASEMENT LIMITS SHOWN.
 4. WORK AREA LIMITS SHOWN. CONTRACTOR SHALL CONFINE ALL WORK ACTIVITIES TO THESE AREAS, INCLUDING STAGING AND STOCKPILING.
 5. VEHICLE/TRAFFIC LIMITS SHOWN. CONTRACTOR SHALL CONFINE ALL TRAVEL BETWEEN WORK LIMIT AREAS ON BOEING FACILITY TO THE LIMITS SHOWN. DO

6. NOT PARK VEHICLES, EQUIPMENT, OR MACHINERY IN THESE AREAS OR OUTSIDE OF INDICATED WORK LIMIT AREAS. DO NOT REMOVE FENCING OR SECURITY CONTROLS WITHOUT PRIOR APPROVAL.
7. WORK INSIDE STEAM PLANT IS LIMITED TO SEDIMENT REMOVAL AND CLEANING OF TUNNEL/CONDENSER PIT. ACCESS THROUGH CONTRACTOR-MADE EXTERIOR OPENING INTO TUNNEL. NO ACCESS THROUGH FACILITY.

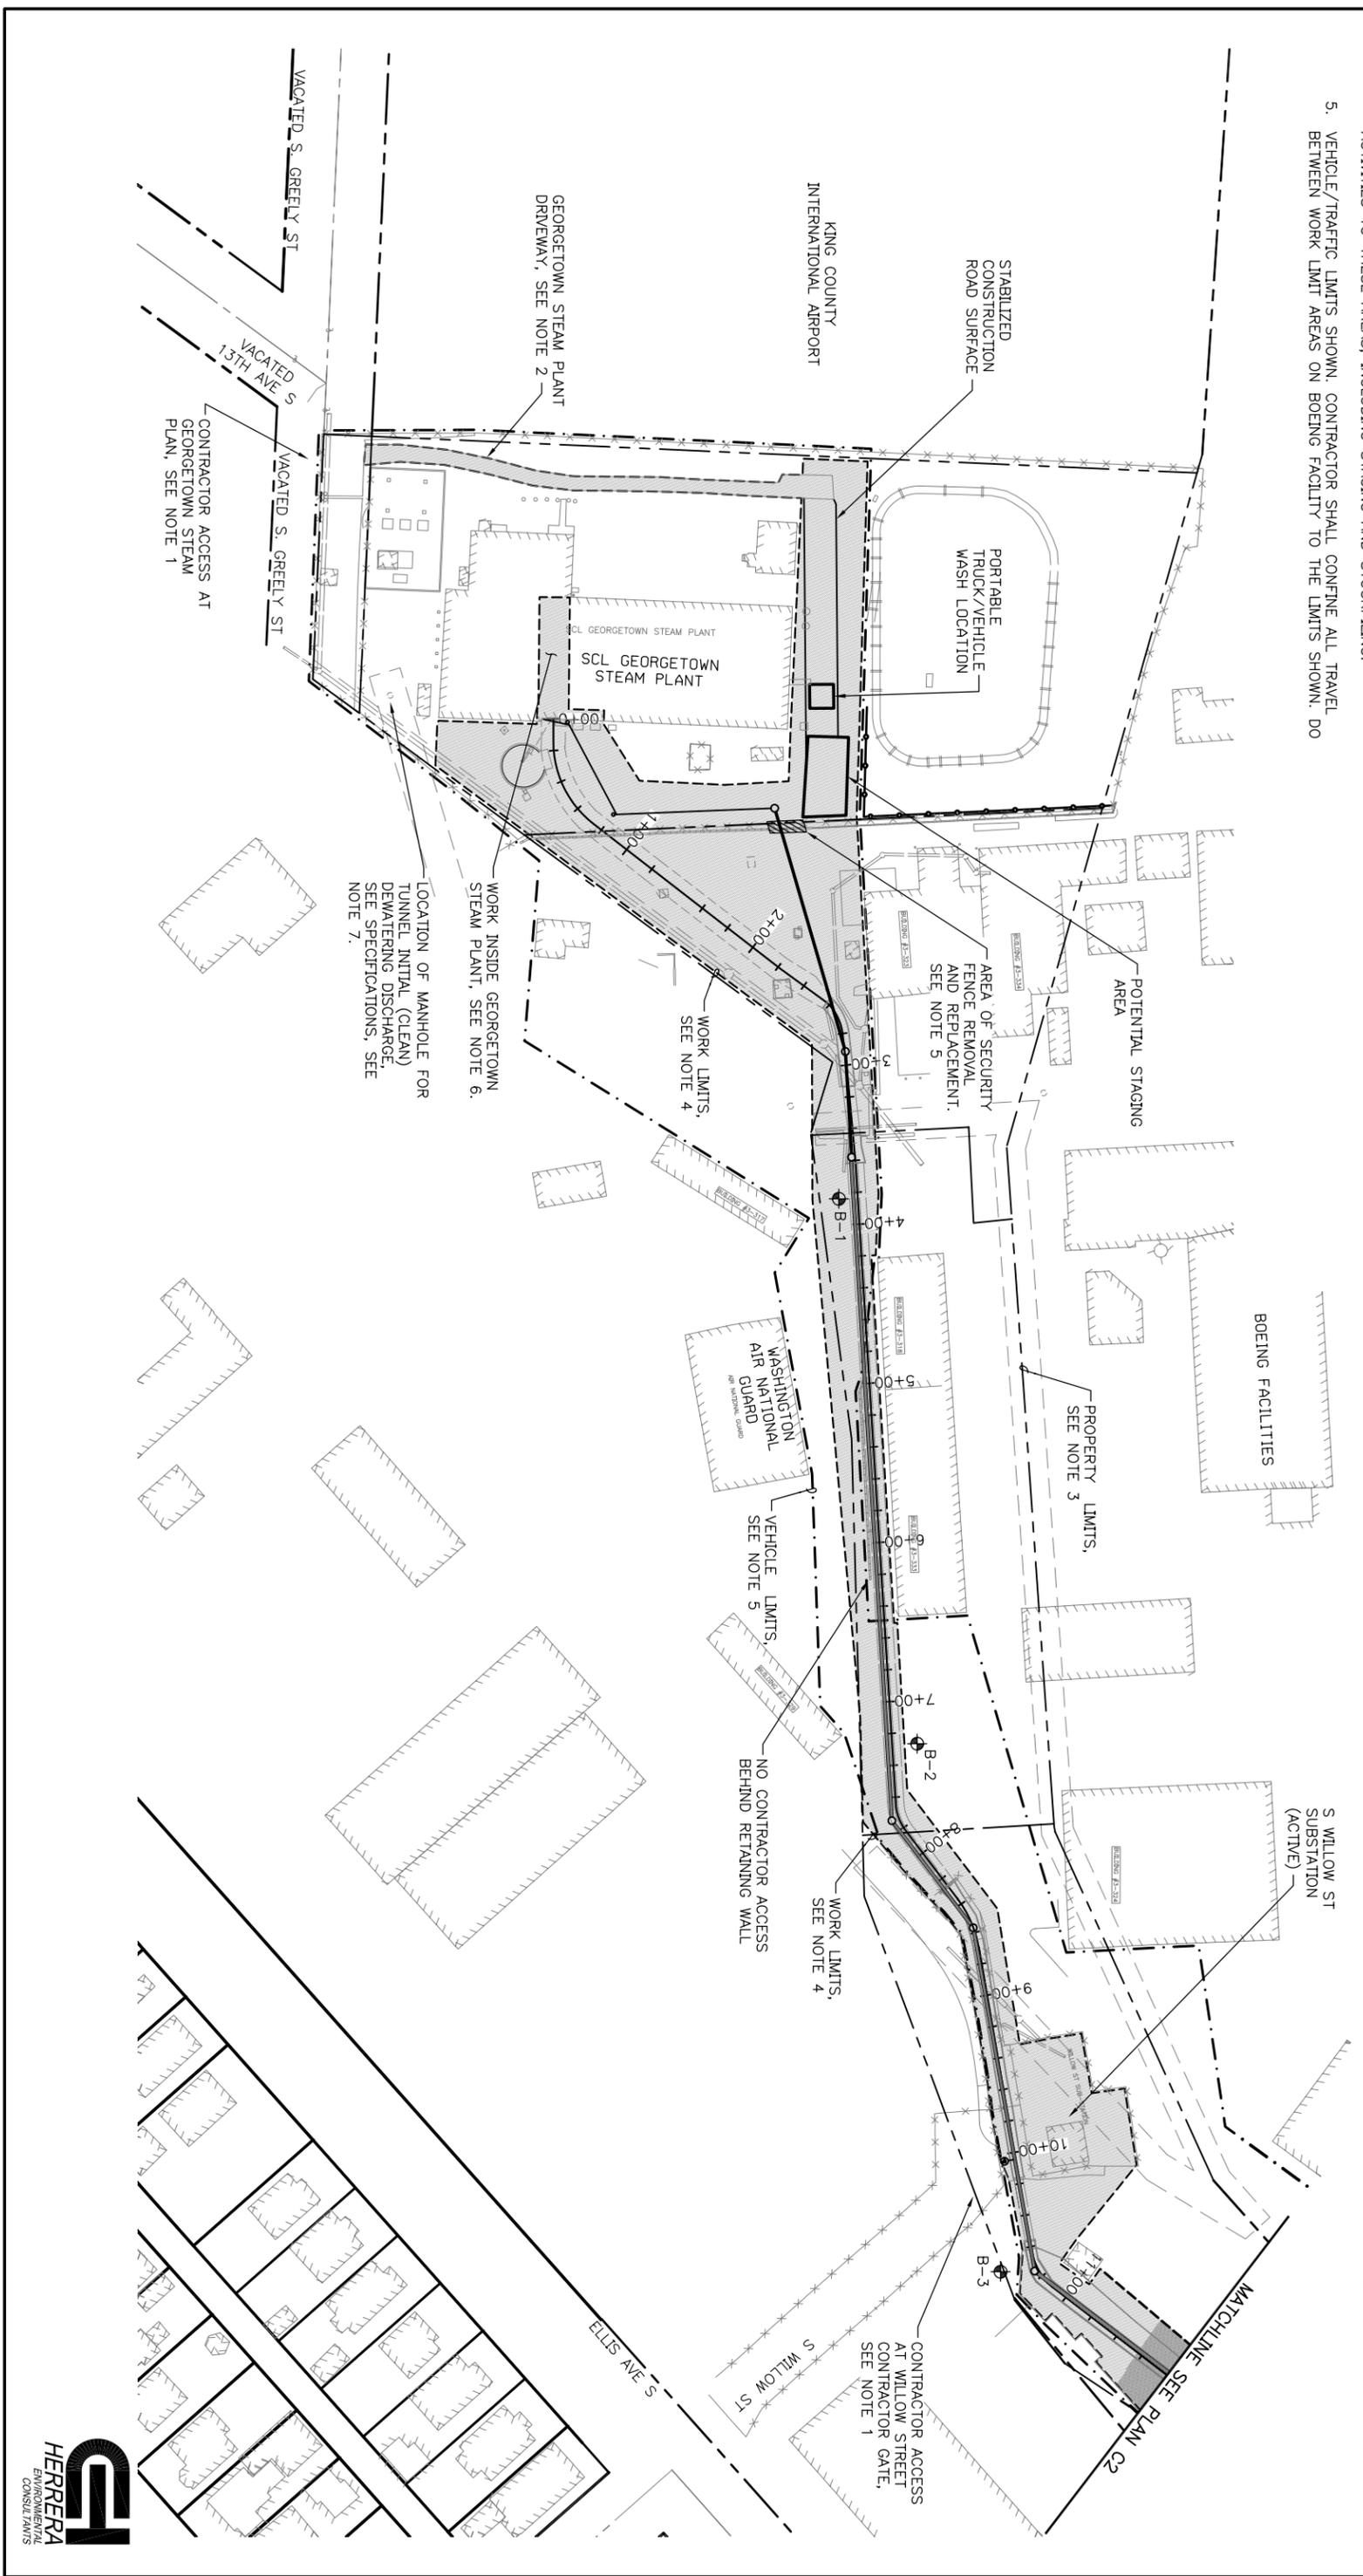
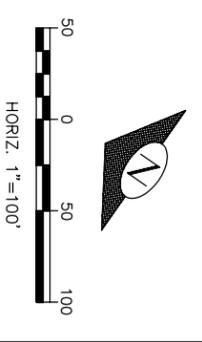


Figure 3 - Northern Portion Georgetown Flume Project Limits