

CRO


Trust Water Right


Case Studies

Lehman
Barkley Irrigating Company


Lehman / Barkley Irrigating Company Project Description

- Irrigation Efficiencies Grant Program project.
- 103 acres converted from flood/rill to:
 - 100.7 acres circle pivot with drop sprinklers and end gun.
 - 2.3 acres hand lines with impact sprinklers.
- 100 % of conserved non-consumptive water will be placed in TWRP in perpetuity:
 - 4.01 cfs, up to 1574 acre-ft
- Conserved water will not be diverted, creating a seven-mile primary reach.
- Future plan to divert water then spill into side channel for habitat enhancement.

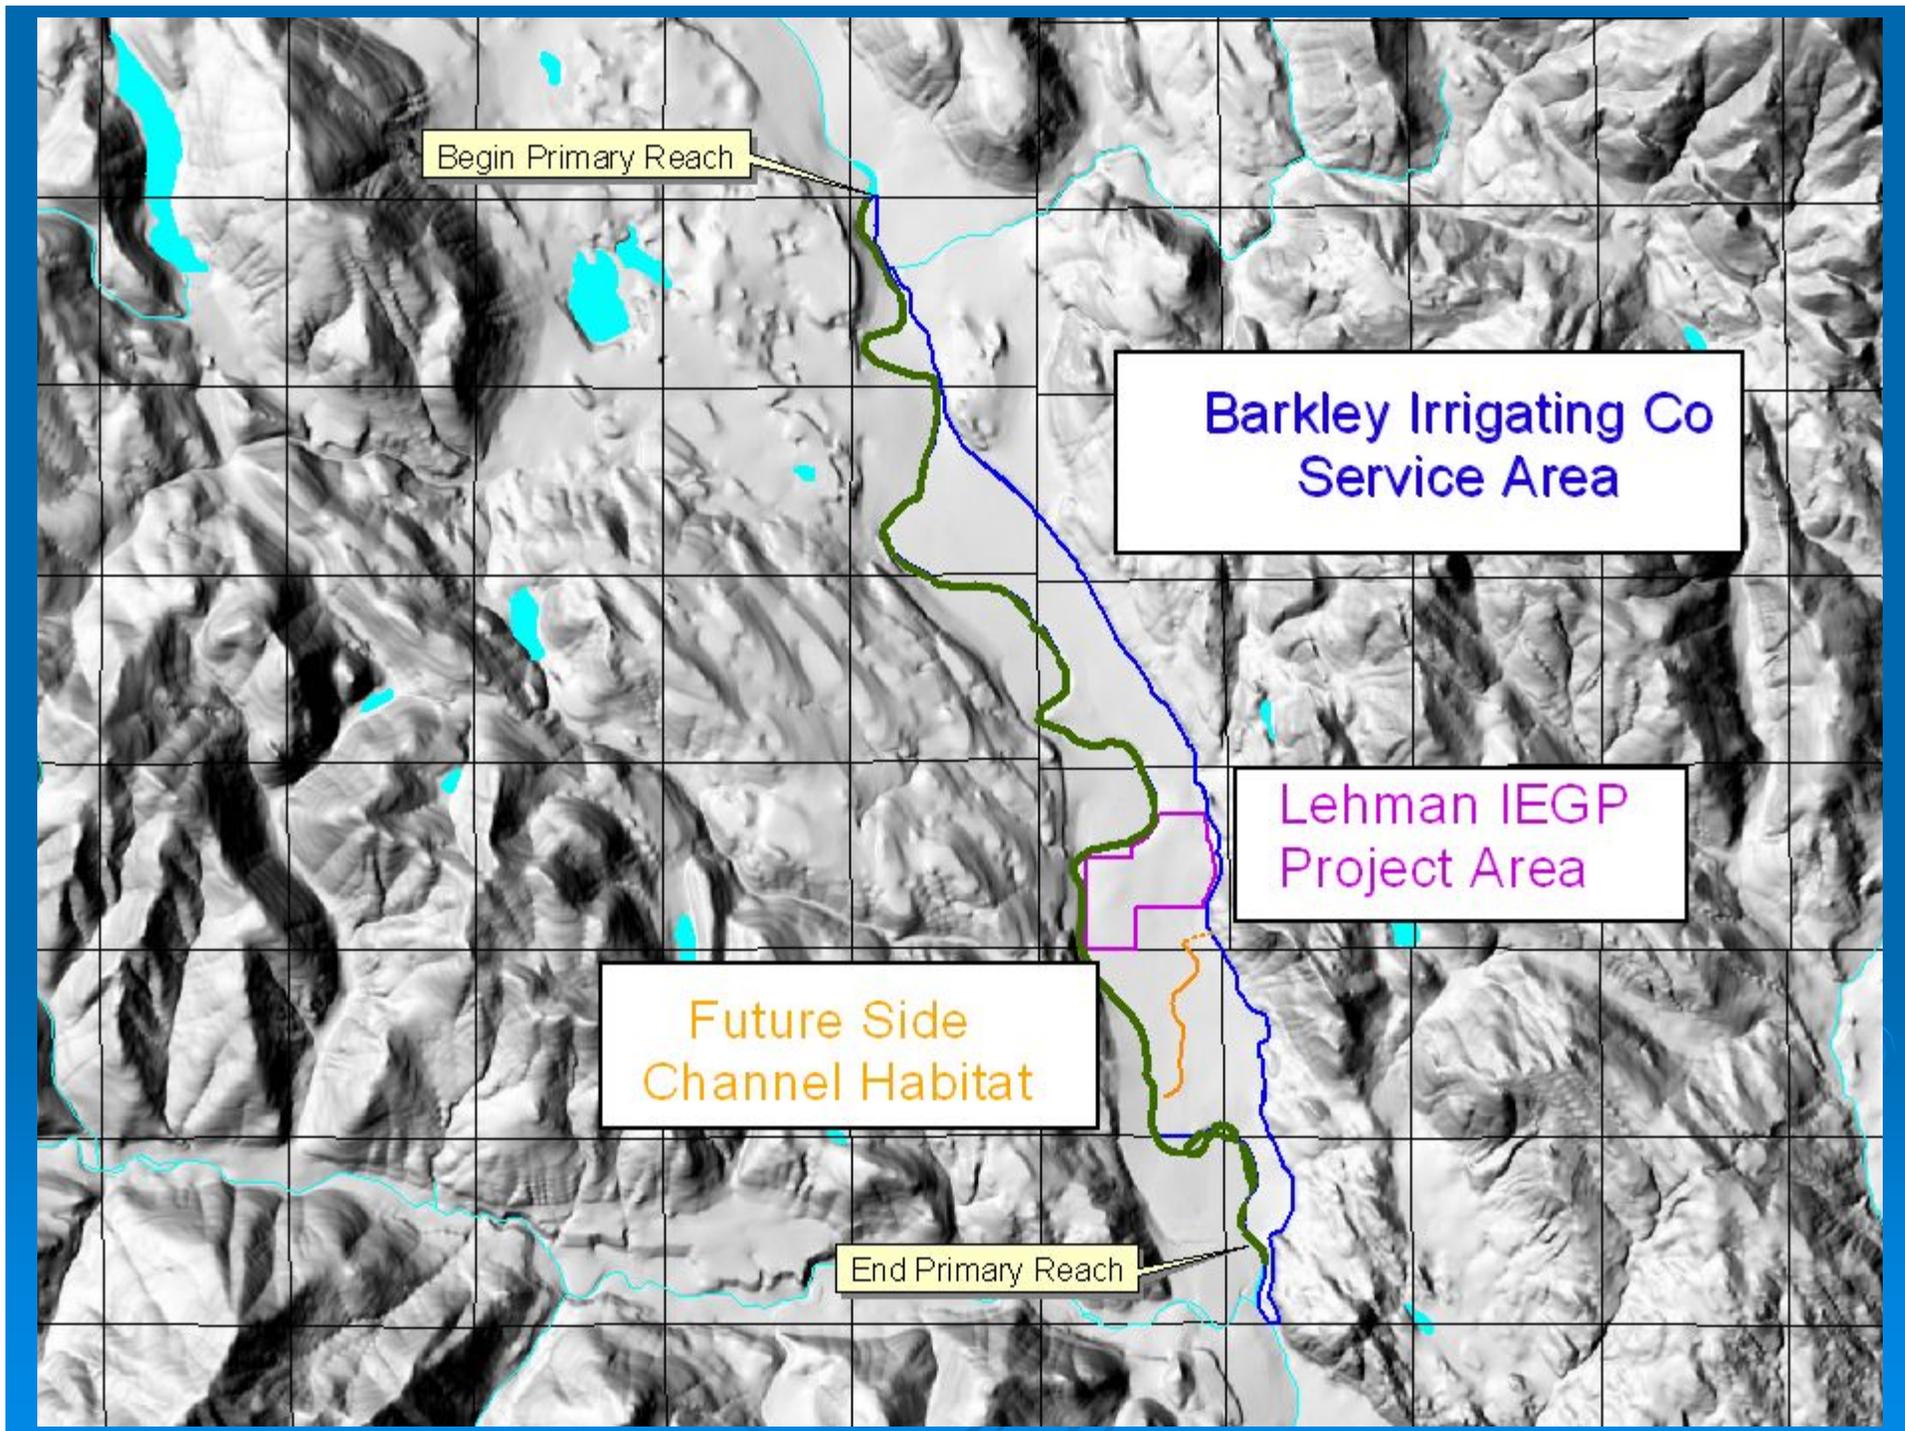

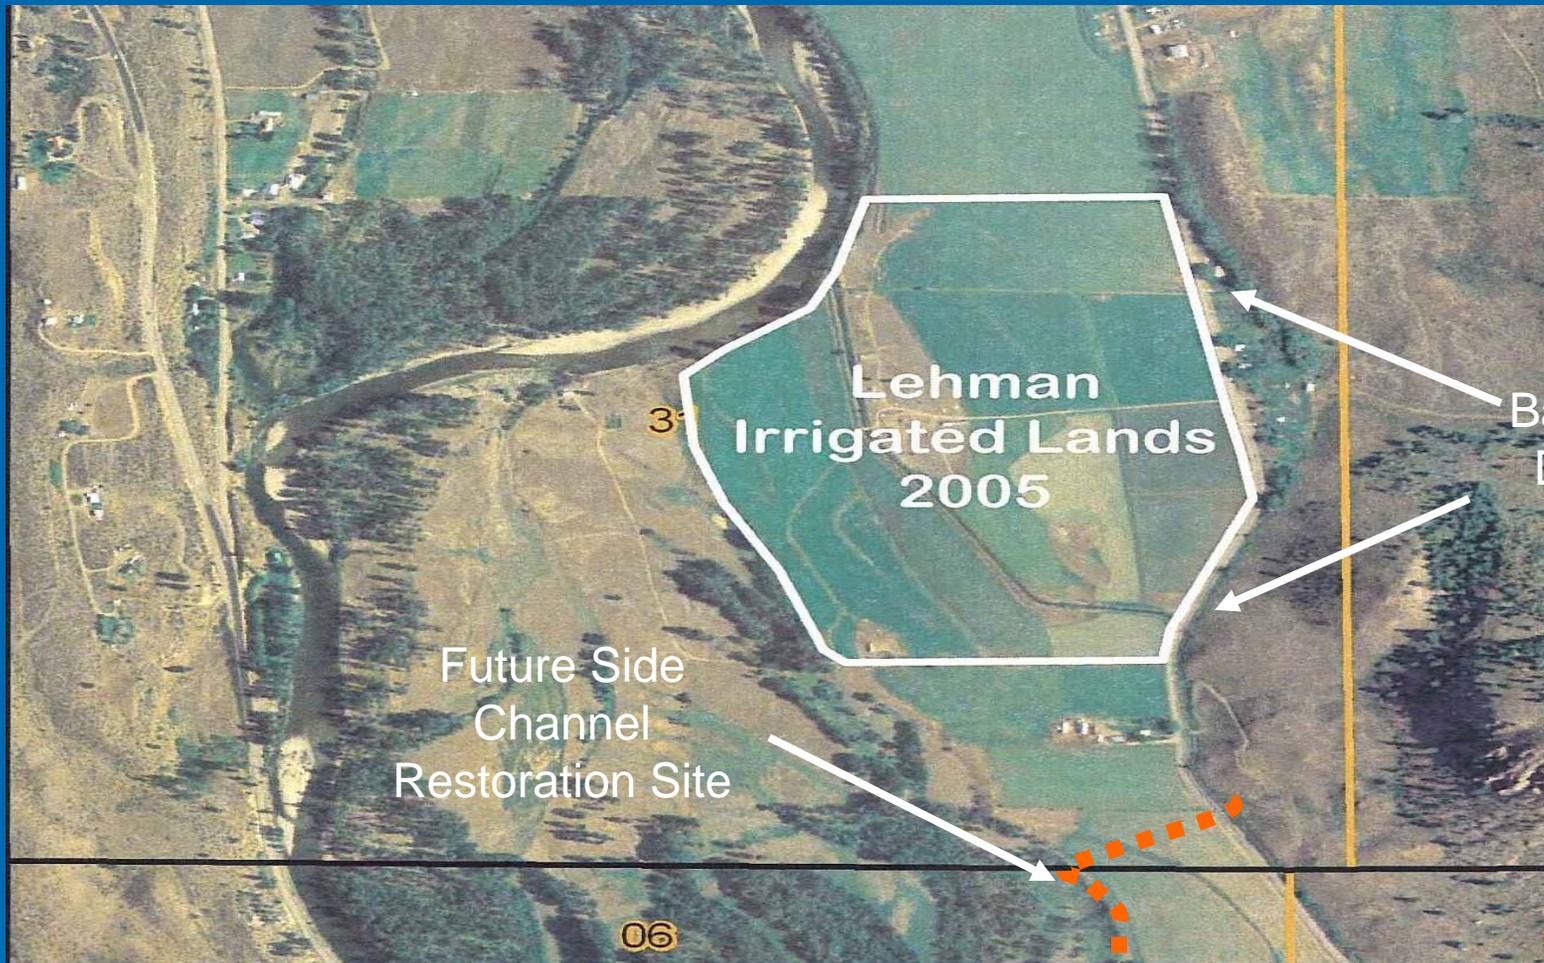

Irrigated Crop Land Tract 644

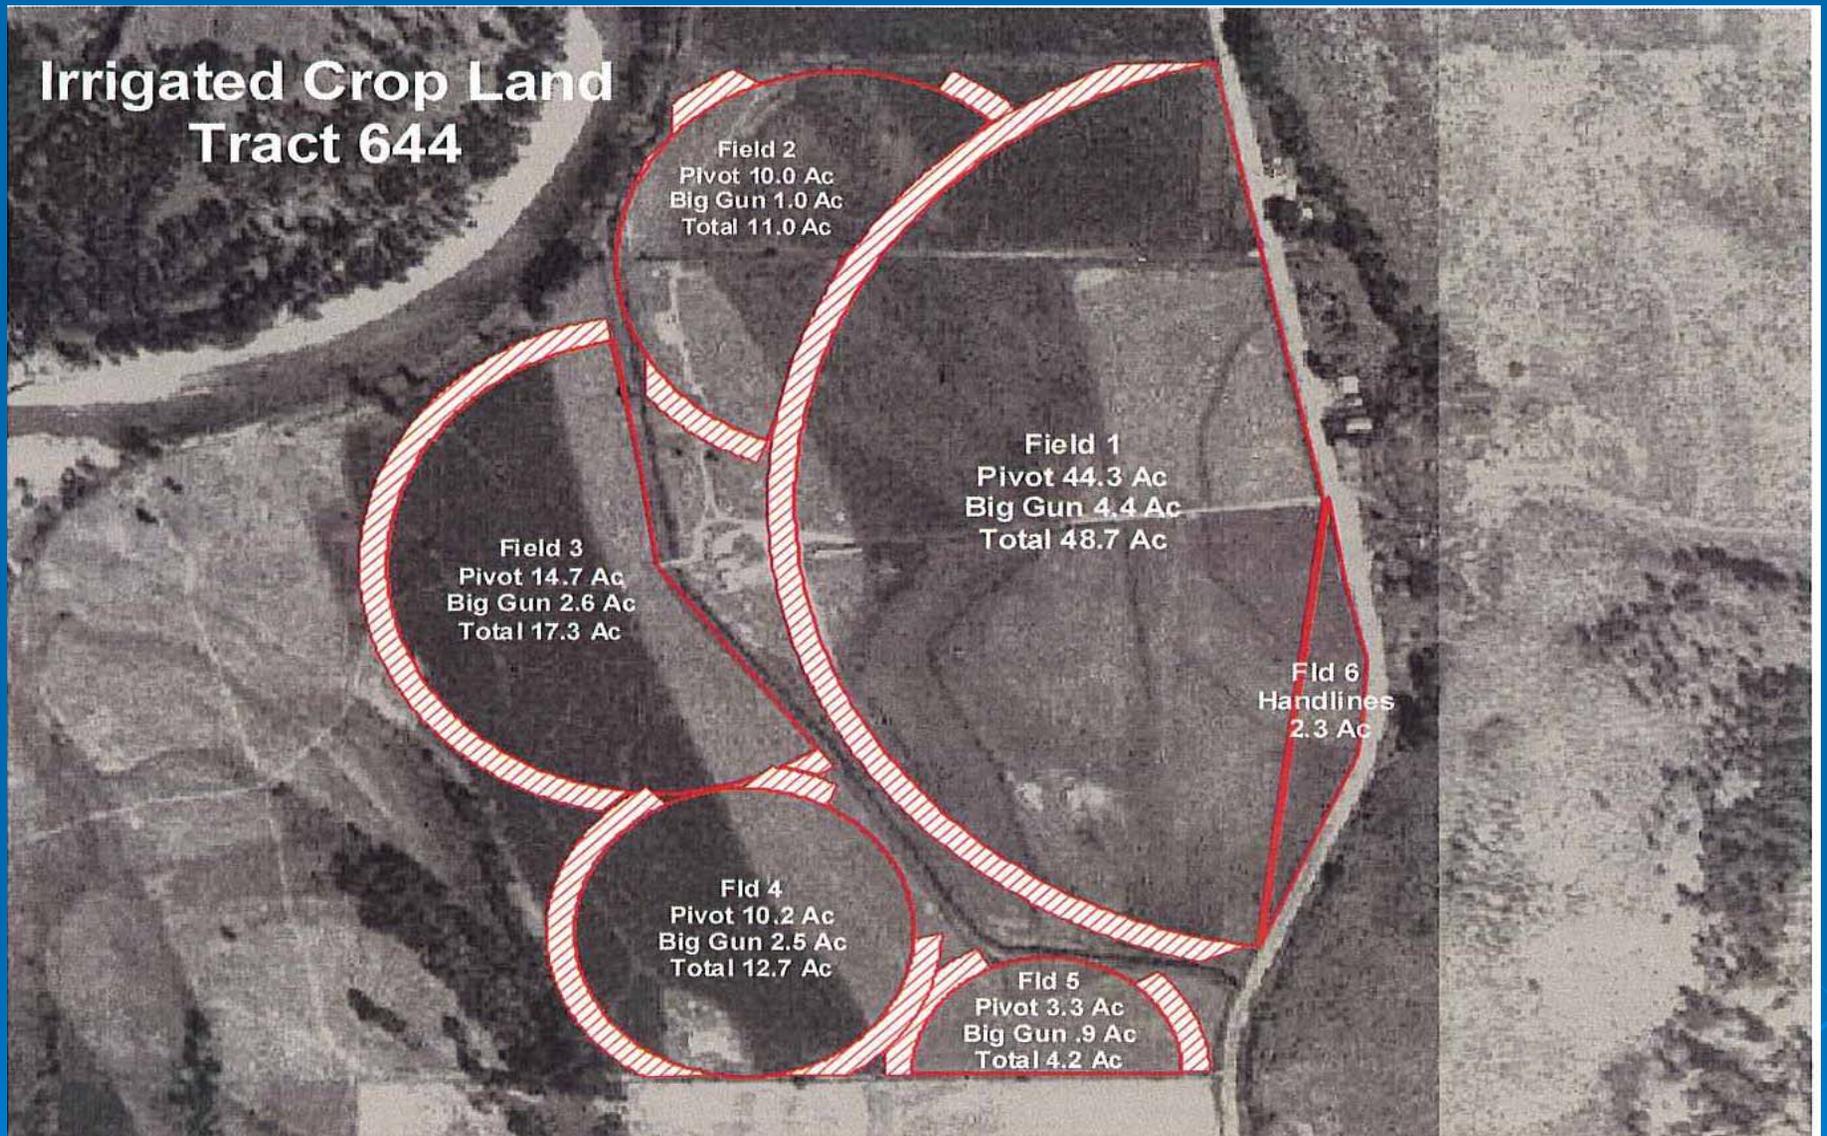

Washington State North Plane
NAD 27



Proposed Side-Channel
Habitat Enhancement

Lehman Project Present Status

➤ To Date:

- Site exam done.
- SEPA threshold determination (DNS) signed.
- Notice of application and SEPA determination going for publication mid-July.