



ISSUED BY
RPP-WTP PDC



RIVER PROTECTION PROJECT – WASTE TREATMENT PLANT

ENGINEERING SPECIFICATION

FOR

Activated Carbon Bed Adsorbers

Some information on pages 48 thru 68 may appear to be illegible, however, the information for assuring adequate design is legible.

Approver Initial: RS
Approver Date: 9/17/08

Content applicable to ALARA? Yes No

ADR No.
24590-WTP-ADR-M-04-0004

Rev
0

Quality Level
Q
DOE Contract No. DE-AC27-01RV14136

NOTE: Contents of this document are Dangerous Waste Permit affecting.

4	9/17/08	<i>[Signature]</i> R. Jablonski	<i>[Signature]</i> N. Whitcomb	<i>[Signature]</i> G. Goolsby	<i>[Signature]</i> D. Carlstrom	<i>[Signature]</i> M. Cochran M. Ehlinger	<i>[Signature]</i> J. Julyk
3	08-Apr-08	R. Jablonski	C. Knauss	G. Goolsby	M. Rosenthal	M. Ehlinger	J. Julyk
2	18-May-05	D. Pease	K. Chin	C. Morley	S. Woolfolk/ Todd Allen	G. Warner	M. Hoffmann
1	02-Nov-04	D. Pease	S. Ngakan	C. Morley	S. Woolfolk/ M. Medsker	G. Warner	M. Hoffman
0	06-Aug-04	D. Pease	S. Ngakan	C. Morley	B. Spezialetti	G. Warner	M. Hoffmann
REV	DATE	BY	CHECK	REVIEW	E&NS	QA	DPEM

SPECIFICATION No.
24590-WTP-3PS-MWK0-T0001

Rev
004

Revision History

Revision	Reason for Revision
0	Issued for Purchase of HLW adsorbers. LAW adsorbers are on hold pending approval of ABAR 24590-WTP-SE-ENS-03-1261 Rev 0.
1	Issued for Purchase based on DTD number 24590-LAW-DTD-ENS-04-0002, with LAW adsorber ITS equipment for carbon bed fire mitigation on hold. This includes: Isolation valves, high temperature switch and interlock, and COx monitor and interlocks.
2	Incorporated SCN number 24590-WTP-3PN-MWK0-00001 and SDDRs 24590-WTP-SDDR-PROC-04-01020, 24590-WTP-SDDR-PROC-04-01040, 24590-WTP-SDDR-PROC-05-00392, 24590-WTP-SDDR-PROC-05-00602, 24590-WTP-SDDR-PROC-05-00652, 24590-WTP-SDDR-PROC-05-00701, and 24590-WTP-SDDR-M-05-00018. Revised LAW instrumentation requirements for remote mounting of analyzers and transmitters. Revised Figures 1 and 2 to clarify instrumentation requirements. Added appendix B and C to clarify testing requirements for carbon media. LAW adsorber ITS equipment for carbon bed fire mitigation is still on hold. This includes: Isolation valves, high temperature switch and interlock, and COx monitors and interlocks.
3	Incorporated SCN 24590-WTP-3PN-MWK0-00002 and SDDRs 24590-WTP-SDDR-M-06-00286, 24590-WTP-SDDR-M-06-00287, and 24590-WTP-SDDR-MS-07-00051. Revised Appendix B and C testing requirements. Added WTP specific tailoring of codes (appendix D-J). Updated HLW ITS List. Updated Environmental Requirements based on EQ Room Data Sheets. Changed CO and COx analyzers from supplier's scope to buyer's. Added Hg Monitor Probe connection detail (Fig 3).
4	Changed Appendix B & C testing scope from Seller to Buyer. Deleted Figure 1 and 2 (replaced with P&ID drawing reference). Renamed Table 1 and Table 2. Added information to Table 2. Added instruction for including WTP piping and supports into Supplier Analysis. Added Monorail and Hoist Carbon media loading requirements and necessary codes. Changed LAW instrumentation scope from supplier to WTP. Renamed Table 1 and 2. Added revisions to Tailored Codes in Appendix section.

Notice

Please note that source, special nuclear, and byproduct materials, as defined in the Atomic Energy Act of 1954 (AEA), are regulated at the US Department of Energy (DOE) facilities exclusively by DOE acting pursuant to its AEA authority. DOE asserts, that pursuant to the AEA, it has sole and exclusive responsibility and authority to regulate source, special nuclear, and byproduct materials at DOE-owned nuclear facilities. Information contained herein on radionuclides is provided for process description purposes only.

Contents

Notice.....	iii
1 Scope.....	1
1.1 Project Description and Location	1
1.2 Equipment, Material, and Services Required.....	1
1.3 Work by Others.....	4
1.4 Acronyms	4
1.5 Definitions	6
1.6 Safety/Quality Classifications.....	7
2 Applicable Documents.....	8
2.1 General.....	8
2.2 Codes	8
2.3 Industry Standards	9
2.4 Reference Documents/Drawings	10
3 Design Requirements.....	11
3.1 General Requirements	11
3.2 Basic Function	14
3.3 Optional Electric Preheater.....	14
3.4 Performance	15
3.5 Design Conditions.....	15
3.6 Environmental Conditions	16
3.7 Mechanical Requirements	16
3.8 Discharge Filter Requirements	17
3.9 Lifting Requirements	18
3.10 Loadings.....	18
3.11 Bag-in/Bag-out Procedure Requirements	19
3.12 CFD Model and Analysis Requirements	19
3.13 Thermal Requirements.....	21
3.14 Activated Carbon Bed Adsorber Design Analysis Requirements.....	21
3.15 Electrical Requirements	22
3.16 Instrumentation and Control Requirements	23
3.17 Accessibility and Maintenance.....	26
4 Materials.....	27
4.1 General.....	27
4.2 Construction	27

4.3	Insulation	28
4.4	Piping	29
4.5	Prohibited Materials	29
4.6	Storage of Special Materials (e.g., stainless steel) prior to work.....	29
5	Fabrication	30
5.1	General Requirements	30
5.2	Assembly	30
5.3	Tolerances	30
5.4	Welding	31
5.5	Coating	32
6	Tests and Inspections	33
6.1	General Requirements	33
6.2	Weld Testing and Inspection	34
6.3	Personnel Qualifications	34
6.4	Laboratory Tests	34
6.5	Shop Tests	35
6.6	Site Tests	36
6.7	Bag-in/Bag-out Procedure Demonstration.....	36
7	Preparation for Shipment.....	37
7.1	General Requirements	37
7.2	Cleanliness	37
7.3	Tagging.....	37
7.4	Documentation	38
7.5	Shipment Preparation Instructions	38
8	Quality Assurance	38
8.1	General Requirements	38
8.2	Quality (Q) Related Components.....	39
8.3	Supplier Deviation.....	39
9	Configuration Management	39
10	Documentation and Submittals	40
10.1	General.....	40
10.2	Drawings	41
10.3	30% Design Review	42
10.4	90% Design Review	42
10.5	Calculations	42

10.6	Schedules.....	43
10.7	Reporting Appendix A Test Results	43
11	References	44
11.1	Incorporated Design Changes.....	44
11.2	Design Changes Incorporated by Reference.....	45

Figures

Figure 1	Deleted.....	46
Figure 2	Deleted.....	47
Figure 3	Mercury Gas Monitor Probe Flange Connection	48

Tables

Table 1	Quality Level List (HLW)	49
Table 2	Quality Level List (LAW)	69

Appendices

Appendix A	Mandatory Ammonium Nitrate Test Requirements for LAW Carbon Bed Adsorbers	A-i
Appendix B	Warranty Testing	B-i
Appendix C	Permit Testing.....	C-i
Appendix D	WTP Specific Tailoring of ASME AG-1-1997	D-i
Appendix E	WTP Specific Tailoring of ASME B31.3-1996.....	E-i
Appendix F	WTP Specific Tailoring of AISC (ASD)	F-viii
Appendix G	WTP Specific Tailoring of ASME NQA-1-1989	G-i
Appendix H	WTP Specific Tailoring of IEEE Std. 384.....	H-i
Appendix I	WTP Specific Tailoring of IEEE Std. 323	I-iv
Appendix J	WTP Specific Tailoring of IEEE Std. 344.....	J-i

1 Scope

1.1 Project Description and Location

The Hanford Tank Waste Treatment and Immobilization Plant (WTP) is a complex of waste treatment facilities where the US Department of Energy (DOE) Hanford Site tank waste will be pretreated and immobilized into stable glass form via vitrification. The WTP Contractor will design, build, and startup the WTP pretreatment and vitrification facilities for the DOE Office of River Protection (ORP). The waste treatment facilities will pretreat and immobilize the low activity waste (LAW) and high level waste (HLW) currently stored in underground storage tanks at the Hanford Site.

The Hanford Site occupies an area of about 560 square miles and is located along the Columbia River, north of Richland, WA in the U.S.A. The WTP Facility will be constructed at the east end of the 200 East Area of the Hanford Site. The counties of Benton, Franklin, and Grant surround the Hanford Site.

1.2 Equipment, Material, and Services Required

This specification provides the requirements for the design, analysis, fabrication, project management, quality assurance, inspection, testing, qualification, and labeling of the Activated Carbon Bed Adsorbers, associated filters, gaskets, insulation, piping, fasteners, shims, and special tools for use in the High Level Waste (HLW) and Low Activity Waste (LAW) facilities. This specification also provides the requirements for the conception, demonstration, design, fabrication, quality assurance, inspection, testing, qualification, and supply of activated carbon, testing equipment, testing apparatus, testing materials, manuals, instructions, and procedures.

The scope of work for the Seller includes all work specifically defined in this specification. Work shall include, but is not limited to, the following:

1.2.1 Provide fully detailed designs, drawings, supporting calculations, supporting analysis, supporting models, procedures, and all labor, materials, fasteners, tooling, equipment, apparatus, required instrumentation, shop drawings, and services necessary to manufacture, test, inspect, label, and package Activated Carbon Bed Adsorbers in accordance with this specification and the Mechanical Data Sheets in Section 2 of the purchasing documents.

1.2.2 Provide Buyer with a breakdown (by paragraph) of the following codes, industry standards, and referenced documents to be applied to each aspect of the Activated Carbon Bed Adsorbers detailed design, drawings, analysis, fabrication, quality assurance, inspection, testing, qualification, labeling, packaging, handling, and shipment for review prior to beginning detailed design:

- ASME AG-1-1997, including WTP specific tailoring
- ASME AG-1a-2000
- ASME N509-1989
- ASME B&PVC, Section VIII, Div 1

If an entire section or part of the above listed codes and standards applies, a breakdown by paragraph is not required. Only the part or section shall be listed.

- 1.2.3 Provide design calculations in accordance with this specification and applicable codes. Calculations shall include, but not be limited to:
- Code calculations
 - Seismic calculations
 - Support calculations (Include tabulated resultant reactions at support locations, by load case)
 - Calculations associated with lifting and erection of the vessel
 - Nozzle loads and movements per thermal and seismic calculations
 - Thermal and discontinuity stresses as applicable
 - Fatigue analysis as applicable for pressure vessels in fatigue services
- 1.2.4 Provide a three-dimensional (3-D) computational fluid dynamics (CFD) model and analysis of the Activated Carbon Bed Adsorbers. CFD model and analysis shall include necessary Buyer supplied inlet piping to model the velocity profile of the offgas air stream entering the adsorber.
- 1.2.5 Provide thermal calculations for the Activated Carbon Bed Adsorber units and support frames in accordance with the requirements of this specification and Mechanical Data Sheets (MDSs) in section 2 of the purchasing documents. Select insulation material (i.e. calcium silicate, mineral wool, etc.) to meet thermal requirements of this specification.
- 1.2.6 Provide an analysis of the Activated Carbon Bed Adsorber design to determine expected adsorber changout frequency.
- 1.2.7 Delete.
- 1.2.8 Provide connecting piping and actuated on/off control valves to configure two (2) Activated Carbon Bed Adsorber units in a single offgas stream to be operated in either series or parallel with the ability to isolate one unit for maintenance and still operate. Activated Carbon Bed Adsorber units shall be configured for automatic (remote) operation from Buyer's integrated control network.
- 1.2.9 Provide internal water deluge fire suppression system to allow flooding of the Activated Carbon Beds. Fire detection shall include a combination of carbon monoxide (CO/CO_x) monitors, temperature monitors, and isolation valves. CO/CO_x monitors shall be interlocked to isolation valves. Process water for carbon bed flooding is a backup to bed isolation. Provide liquid level interlocks operated from radar level indicators.
- 1.2.10 Provide fire detection and suppression system acceptance tests.
- 1.2.11 Provide control logic and I/O mapping for automatic configuration and fire suppression system.
- 1.2.12 In addition to the field testing requirements set forth in ASME AG-1, Section TA, and/or ASME N509, Section 9, conduct the following acceptance tests in the shop, on each Activated Carbon Bed Adsorber unit prior to shipment:
- Visual Inspection
 - Structural Capability Test

- System Bypass Test
 - Mechanical Test
 - Differential Pressure Test
 - Airflow Distribution Test
 - Electrical Air Heater Performance Test (per design)
- 1.2.13 Provide challenge gas and challenge gas injection and sampling ports/manifolds.
- 1.2.14 Provide detailed bag-in/bag-out procedure for removal and replacement of adsorbent and any other filter(s) required.
- 1.2.15 Provide all personnel, equipment, apparatus, labor, personal protection equipment (PPE), materials, glovebags, bags, HEPA filters, etc. to simulate field conditions, demonstrate, and videotape the bag-in/bag-out procedure using fully assembled Activated Carbon Bed Adsorber equipment in shop.
- 1.2.16 Provide material certified test reports, welding procedures, insulation installation procedures, testing procedures, testing results, quality assurance procedures, quality assurance inspection results, and all other procedures and documentation required per this specification.
- 1.2.17 Provide transportation, storage, and installation instructions for the Activated Carbon Bed Adsorber units per the Seller's recommendations and the requirements of this specification.
- 1.2.18 Package and prepare the Activated Carbon Bed Adsorber units for shipment to the WTP site. Packaging shall be sufficient to allow outdoor storage for a period of up to one year at the WTP site, without Buyer action except routine inspection. Environmental conditions for storage are found in section 3.6 of this specification.
- 1.2.19 Provide all equipment, instrumentation, labor, and materials to perform a shop lifting test, demonstrating that the lifting lugs or attachment points are adequate to support the Activated Carbon Bed Adsorber units without distortion. Lifting lugs or attachment points shall be placed such that the equipment remains essentially level during the lift without tilting or swaying. Seller shall provide shop test report on lifting points provided on the Activated Carbon Bed Adsorber equipment.
- 1.2.20 Provide Material Safety Data Sheets (MSDSs) for loaded Activated Carbon Bed Adsorber and all other materials used in the construction of the Activated Carbon Bed Adsorber units.
- 1.2.21 Provide operation and maintenance manuals, with sequence of operations, and recommended spare parts list.
- 1.2.22 Provide a set of special tools for each Activated Carbon Bed Adsorber required for operation, bag-in/bag-out, sampling, and maintenance.
- 1.2.23 Provide design for structural attachment to the Buyer's provided embeds.
- 1.2.24 Delete.

1.3 Work by Others

Any item not specifically listed as being supplied by the Buyer shall be provided by the Seller. The Buyer shall supply the following:

- 1.3.1 Shipping to jobsite.
- 1.3.2 Unloading and storage of all materials and equipment at jobsite.
- 1.3.3 Activated Carbon Bed Adsorber installation labor at jobsite.
- 1.3.4 Foundation, embeds, and anchor bolts.
- 1.3.5 Electric power supply.
- 1.3.6 External wiring.
- 1.3.7 External connection to Buyer's instrumentation and controls.
- 1.3.8 Control system.
- 1.3.9 Piping external to the Activated Carbon Bed Adsorber unit package.
- 1.3.10 Pressure drop indicators for pressure drop piping connections.
- 1.3.11 Installation of insulation.
- 1.3.12 Instrument racks.
- 1.3.13 Appendix B (Warranty) & C (Permit) testing.
- 1.3.14 LAW instrumentation.

1.4 Acronyms

AGS	American Glovebox Society
AISC	American Institute of Steel Construction
ASD	Adjustable Speed Drive
ASME	American Society of Mechanical Engineers
ASTM	International Society for Testing and Materials
AWS	American Welding Society
CFD	Computational Fluid Dynamics
CFR	Code of Federal Regulations
3-D	Three-Dimensional

DBE	Design Basis Event
DF	Decontamination Factor
DOE	US Department of Energy
ESF	Engineered Safety Feature
ERDA	Energy Research and Development Administration
FMEA	Failure Mode and Effect Analysis
HEPA	High Efficiency Particulate Air
HCl	Hydrogen Chloride
HLW	High Level Waste
HF	Hydrogen Fluoride
HVAC	Heating, Ventilation, and Air-Conditioning
HOP	High Level Waste Secondary Offgas Treatment System
FFB	Foundation Field Bus
ICN	Integrated Control Network
IEEE	Institute of Electrical and Electronics Engineers
ISA	Instrument Service Air
ITS	Important to Safety
LAW	Low Activity Waste
LVP	Low Activity Waste Secondary Offgas System
MR	Material Requisition
MDS	Mechanical Data Sheet
MSDS	Material Safety Data Sheet
NDE	Nondestructive Evaluation/Examination
NRTL	Nationally Recognized Testing Laboratory
ORP	Office of River Protection
OSHA	Occupational Safety and Health Administration
P&ID	Piping and Instrumentation Diagram
PMI	Positive Material Identification
PPE	Personal Protection Equipment
ppm	Parts per million
psf	pounds per square foot (lb/ft ²)
PSV	Pressure Safety Valve
QA	Quality Assurance
QAP	Quality Assurance Program

QL	Quality Level
SC	Seismic Category
scfm	Standard Cubic Feet per Minute
SDDR	Supplier Deviation Disposition Request
SS	Stainless Steel
SS	Safety Significant
TBD	To Be Determined
UL	Underwriters Laboratories, Inc.
VSL	Vitreous State Laboratory of The Catholic University of America
WAC	Washington Administrative Code
WTP	Hanford Tank Waste Treatment and Immobilization Plant

1.5 Definitions

Activated Carbon Bed Adsorber Unit: Refers to complete Carbon Bed equipment assembly. This includes two (2) full capacity Carbon Bed Adsorbers, connecting pipe work, valves, instrumentation, and support frame for Carbon Bed Adsorbers and piping.

Activated Carbon Bed Adsorber expert: One who has extensive knowledge regarding the characteristics and application of Activated Carbon Bed Adsorbers. Must have a minimum of five (5) years experience.

Adsorbent Media: A solid having the ability to concentrate and hold other substances.

Adsorber: A device or vessel containing adsorbent (e.g., an adsorber cell filled with adsorbent).

Bag-in/Bag-out: A method of introducing and removing items from a contaminated enclosure where a bag provides a physical barrier at all times during the operation that prevents the spread of contamination.

Buyer's Representative(s): The Buyer's designee(s), who shall witness onsite operations at the seller and sub-seller sites and perform onsite inspections and surveillance.

Bypass, Leakage: A pathway through which contaminated air can escape treatment by the installed HEPA and/or adsorber banks. Examples are leaks in filters and filter mounting frames, defective or inefficient isolation dampers that result in the uncontrolled flow through adjacent plenums, and unsealed penetrations for electrical conduits, pipes, floor drains, etc.

Challenge Gas: A gas of known characteristics, under specified conditions, used for the purpose of testing. For in-shop and in-place/field testing of adsorbers required by this specification. The challenge gas to be used shall depend on what is recommended by the Activated Carbon Bed Adsorber manufacturer. Challenge gas shall be an environmentally safe non-ozone depleting substance, if possible.

Engineered Safety Feature (ESF): A nuclear air treatment system, HVAC system, gas processing system, or a component that serves to control and limit the consequences of releases of energy and radioactivity.

Glovebag: A temporary barrier to contain or prevent the spread of contamination generally during system maintenance or production. The area or component is surrounded by the portable glovebox boundary material, usually a flexible plastic film. Personnel perform work inside the glovebag through glovesleeves and gloves while remaining outside the containment area. Other access ports are provided to allow for equipment and service penetrations as necessary. Additional openings can be provided through the use of zippers, velcro closures, and bag-out ports.

HEPA Filter: A high efficiency particulate air filter having a fibrous medium with a particle removal efficiency of at least 99.97 % when tested with essentially monodispersed 0.3 μm test aerosol particles.

Mounting Frame: A structure against which adsorbers may be snugly mounted and supported in a position that permits the passage of air or gas and provides a surface to hold the sealing gasket, thereby avoiding a potential bypass or leakage path for the non-filtered air or gas.

Paragraph: When a paragraph of this specification, referenced documents, referenced codes, or referenced standards is referenced in this specification, the paragraph referenced and all subparagraphs and sub-subparagraphs of the paragraph referenced shall be considered inclusive.

Quality Level: The quality level identifies the quality requirements to be applied to the equipment. The identified quality levels are Q and CM (Commercial). Quality requirements are specifically defined on the associated mechanical data sheets (MDSs) and supplier quality assurance program (QAP) requirements data sheets.

Safety Significant (SS): The structures, systems, and components which are not designated as safety-class structures, systems, and components, but whose preventative or mitigative function is a major contributor to defense and/or worker safety as determined from safety analyses.

Seismic Category: Specific requirements for each seismic category are defined in reference documents listed in section 2.4 of this specification.

Special Tools: Any tooling required to perform maintenance on the Activated Carbon Bed Adsorber unit or for Activated Carbon Bed Adsorber and discharge filter removal and replacement. Includes tools that must be specially designed and fabricated and tools that are readily available in the commercial market.

1.6 Safety/Quality Classifications

- 1.6.1 Activated Carbon Bed Adsorber units for HLW shall meet the quality level requirements of Q as shown on the associated MDSs and supplier quality assurance program requirements data sheet. Seismic category shall be SC-III as shown on the associated MDSs and defined in

reference documents listed in section 2.4 of this specification. Safety classification is Safety Significant (SS).

- 1.6.2 Activated Carbon Bed Adsorber units for LAW shall meet the quality level requirements of Q as shown on the associated MDSs and supplier quality assurance program requirements data sheet. Seismic category shall be SC-III as shown on the associated MDSs and defined in reference documents listed in section 2.4 of this specification. Safety classification is Safety Significant (SS).

2 Applicable Documents

2.1 General

- 2.1.1 Work shall be done in accordance with the referenced codes, standards, and documents listed below, which are an integral part of this specification.
- 2.1.2 When specific chapters, sections, parts, or paragraphs are listed following a code, industry standard, or reference document, only those chapters, sections, parts, or paragraphs of the document are applicable and shall be applied. For the codes and standards listed in section 2, the specific revision or effective date identified, as well as the specific revision or effective date of codes and standards that they incorporate by reference (daughter codes and standards), shall be followed. If a date or revision is not identified, the latest issue, including addenda, at the time of quotation, shall apply. The effective dates and revisions listed in section 2 shall apply to subsequent references to the codes and standards within this specification. When more than one code, standard, or referenced document covers the same topic, the requirements for all must be met with the most stringent governing. The use of any other edition, revision, or issue requires buyer's approval.
- 2.1.3 Unless specified otherwise, requirements apply to both HLW and LAW design, fabrication, testing, storage, and handling.

2.2 Codes

- 2.2.1 ASME AG-1-1997, Code on Nuclear Air and Gas Treatment, Sections AA, FE, FF, and TA. See Appendix D for WTP specific tailoring.
- 2.2.2 ASME AG-1a-2000, Addenda to ASME AG-1-1997 Code on Nuclear Air and Gas Treatment, Section HA.
- 2.2.3 ASME B31.3-1996, Process Piping. See Appendix E for WTP specific tailoring.
- 2.2.4 ASME Boiler and Pressure Vessel Code, Section VIII, Div. 1, Rules for Construction of Pressure Vessels.
- 2.2.5 DOE-RL-92-36, Hanford Site Hoisting and Rigging Manual.

- 2.2.6 AWS D1.6, Structural Welding Code-Stainless Steel.
- 2.2.7 Delete.
- 2.2.8 AISC (ASD), 9th Edition, American Institute of Steel Construction. See Appendix F for WTP specific tailoring.
- 2.2.9 29 CFR 1910, Occupational Safety and Health Standards (OSHA).
- 2.2.10 UBC-1997, *Uniform Building Code*.
- 2.2.11 ASME Boiler and Pressure Vessel Code, Section V, Nondestructive Examination.

2.3 Industry Standards

- 2.3.1 AGS-G001 ©1998, Guideline for Gloveboxes, Second Edition.
- 2.3.2 ASME N509-1989, Nuclear Power Plant Air-Cleaning Units and Components, Sections 1, 2, 3, 4 – (Paragraphs 4.3, 4.4, 4.6.1 through 4.6.7.2, 4.11, 4.12, 4.13(a)), 5 – (Paragraphs 5.5, 5.6.5.5 and 5.6.5.6), 7 – (Paragraph 7.2), 8 – (Paragraph 8.2), 9, Appendix C, and Appendix D.
- 2.3.3 ASME N510-1989, (Rev.1995), Testing of Nuclear Air Treatment Systems, Sections 1 through 8, 11, 13, 14, 15, and appendices.
- 2.3.4 ASME NQA-1-1989, Quality Assurance Program Requirements for Nuclear Facilities. See Appendix G for WTP specific tailoring.
- 2.3.5 ASME Y14.100, Engineering Drawing Practices.
- 2.3.6 ASTM E84, Standard Test Method for Surface Burning Characteristics of Building Materials.
- 2.3.7 ASTM F593, Standard Specification for Stainless Steel Bolts, Hex Cap Screws, and Studs.
- 2.3.8 ASTM F594, Standard Specification for Stainless Steel Nuts.
- 2.3.9 ERDA 76-21, Nuclear Air Cleaning Handbook, Chapter 1 (All), Chapter 2 (Paragraphs 2.1 through 2.4.16), Chapter 3 (Paragraphs 3.1, 3.4.1, 3.4.2, 3.4.5, 3.4.6), Chapter 4 (Paragraphs 4.3 through 4.3.5, 4.5.9), Chapter 7 (All), Chapter 8 (All), Chapter 9 (Paragraph 9.4.1).
- 2.3.10 NACE Standard RP0198, The Control of Corrosion Under Thermal Insulation and Fireproofing Materials-A Systems Approach.
- 2.3.11 PIP INIH1000, Hot Insulation Installation Details.
- 2.3.12 RR-C-271D, Federal Specification for chains and attachments, welded and weldless.
- 2.3.13 NEMA 4, Enclosures for Electrical Equipment.
- 2.3.14 IEEE Std. 384, Standard Criteria for Independence of Class 1E Equipment and Circuits. See Appendix H for WTP specific tailoring.

- 2.3.15 IEEE Std. 323, Standard for Qualifying Class 1E Equipment for Nuclear Power Generating Stations. See Appendix I for WTP specific tailoring.
- 2.3.16 IEEE Std. 344, Recommended Practice for Seismic Qualification of Class 1E Equipment for Nuclear Power Generating Stations. See Appendix J for WTP specific tailoring.
- 2.3.17 ASME B320.20-1999, Below-The-Hook Lifting Devices.
- 2.3.18 ASME B30.11, Monorails and Underhung Cranes.

2.4 Reference Documents/Drawings

- 2.4.1 24590-WTP-3PS-G000-T0001, *General Specification for Supplier Quality Assurance Program Requirements*
- 2.4.2 24590-WTP-3PS-G000-T0002, *Engineering Specification for Positive Material Identification (PMI) for Shop Fabrication*
- 2.4.3 24590-WTP-3PS-G000-T0003, *Engineering Specification for Packaging, Handling, and Storage Requirements*
- 2.4.4 24590-WTP-3PS-NWP0-T0001, *Engineering Specification for General Welding and NDE Requirements for Supplier Fabricated Piping*
- 2.4.5 24590-WTP-3PS-MVB2-T0001, *Engineering Specification for Welding of Pressure Vessels, Heat Exchangers and Boilers*
- 2.4.6 24590-WTP-3PS-JQ07-T0001, *Engineering Specification for Instrumentation for Package Systems*
- 2.4.7 24590-WTP-3PS-SS00-T0001, *Engineering Specification for Welding of Carbon Structural Steel*
- 2.4.8 24590-WTP-3PS-SS00-T0002, *Engineering Specification for Welding of Structural Stainless Steel and Welding of Structural Carbon Steel to Structural Stainless Steel*
- 2.4.9 24590-WTP-3PS-FB01-T0001, *Engineering Specification for Structural Design Loads for Seismic Category III and IV Equipment and Tanks*
- 2.4.10 24590-WTP-3PS-NN00-T0001, *Engineering Specification for Thermal Insulation for Mechanical Systems*
- 2.4.11 Deleted.
- 2.4.12 24590-WTP-3PB-P000-TS11V, *Piping Material Classification, Pipe Class S11V*
- 2.4.13 24590-WTP-3PB-P000-TS11N, *Piping Material Classification, Pipe Class S11N*
- 2.4.14 24590-WTP-3PS-PV00-T0001, *Engineering Specification for Technical Supply Conditions for Valves*

- 2.4.15 24590-WTP-3PS-JV15-T0001, *Engineering Specification for Actuators for On/Off Valves*
- 2.4.16 24590-WTP-3PS-EKP0-T0001, *Engineering Specification for Electrical Requirements for Packaged Equipment*
- 2.4.17 24590-WTP-3PS-MUMI-T0002, *Engineering Specification for Low Voltage Induction Motors*
- 2.4.18 24590-WTP-3PS-PS02-T0001, *Engineering Specification for Shop Fabrication of Piping*
- 2.4.19 24590-WTP-3PS-MV00-T0001, *Engineering Specification for Pressure Vessel Design and Fabrication*
- 2.4.20 24590-WTP-3PS-JQ06-T0005, *Environmental Qualification of Control and Electrical Systems and Components*
- 2.4.21 24590-WTP-J8-50-00001, *Controls and Instrumentation Radar Installation Wave Guide Spool Joining Details.*
- 2.4.22 24590-WTP-MV-M59T-00016002, *Vessel Connections Standard Details Sheet 2 of 3*
- 2.4.23 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*
- 2.4.24 24590-WTP-3PS-G000-T0015, *Engineering Specification for Environmental Qualification of Mechanical Equipment*
- 2.4.25 24590-WTP-3PS-G000-T0014, *Engineering Specification for Supplier Design Analyses*
- 2.4.26 24590-HLW-M6-HOP-00011, *P&ID - HLW Melter Offgas System Melter 1 Secondary Offgas Treatment Sheet 3 of 3.*
- 2.4.27 24590-HLW-M6-HOP-20011, *P&ID - HLW Melter Offgas System Melter 2 Secondary Offgas Treatment Sheet 3 of 3.*
- 2.4.28 24590-LAW-M6-LVP-00004, *P&ID - LAW Melters Secondary Offgas Vessel Vent Process System Mercury Mitigation Equipment.*
- 2.4.29 24590-WTP-LIST-CON-08-0001, *Restricted Materials List.*

3 Design Requirements

3.1 General Requirements

- 3.1.1 The Activated Carbon Bed Adsorbers and support frame shall be designed per this specification, the applicable documents listed in section 2 of this specification, and the MDSs in section 2 of the purchasing documents.
- 3.1.2 The detailed design of the Activated Carbon Bed Adsorbers shall be performed by personnel who have past experience in the design, fabrication, and testing of Activated Carbon Bed

Adsorber banks or HEPA filter banks to meet the requirements set forth in ASME AG-1, ASME AG-1a, and NQA-1. Qualifications for personnel conducting the detailed design of the Activated Carbon Bed Adsorber shall be provided to the Buyer for review.

- 3.1.3 All calculations, modeling, analyses, drawings, and documentation shall be performed and/or completed using U.S. customary units.
- 3.1.4 The design of the Activated Carbon Bed Adsorber pressure boundary shall be per the requirements of ASME Boiler and Pressure Vessel Code, Section VIII, Div.1. (Code stamp is not required) Design pressure used shall be as specified on the MDSs. Design temperature shall be determined by Seller based on thermal analysis specified in section 3.13.5 for conditions generated during a carbon bed fire.
- 3.1.5 The design of the Activated Carbon Bed Adsorbers shall be per Seller and shall meet the performance requirements of this specification, appendices, and MDSs in section 2 of the purchasing documents.
- 3.1.6 Each Activated Carbon Bed Adsorber shall be equipped with a fire suppression system. Fire detection shall include a combination of CO monitors and carbon bed temperature monitors for fire detection. Refer to P&ID drawings in Section 2 of the MR for additional information related to CO/COx monitors and temperature monitors specific to each HLW and LAW Activated Carbon Bed Adsorber.

For HLW, each fire detection system shall allow the isolation of one carbon bed upon detection of a fire, such that one Activated Carbon Bed Adsorber will not affect the fire detection capability in the other unit. Refer to 24590-HLW-M6-HOP-00011 and 24590-HLW-M6-HOP-20011 for HLW CO monitor and isolation valve configuration requirements.

For LAW, COx monitors shall be located on the inlet and outlet of the Activated Carbon Bed Adsorber unit. LAW Activated Carbon Bed Adsorber unit shall be isolated with pneumatic valves on the inlet as shown on P&ID 24590-LAW-M6-LVP-00004.

- 3.1.7 The Activated Carbon Bed Adsorbers shall be designed for carbon bed isolation as the primary means of fire suppression. Seller shall also design a water flood fire suppression system in accordance with applicable requirements of ASME AG-1, subarticle FE-4620, and MDSs in section 2 of the purchasing documents. Pressure Relief shall be treated as an ITS function of the Carbon Bed Adsorbers. Seller shall account for increased pressure inside the carbon bed vessel caused by activation of the fire suppression system and flooding of the carbon bed with water by providing the proper sized PSV for each HLW housing and specifying the required size Rupture Disk for each LAW housing. Seller shall work closely with Buyer in determining required flow-rates for fire suppression water.
- 3.1.8 The Activated Carbon Bed Adsorber units and all permanently attached appurtenances (i.e. piping manifold, insulation, valves, and maintenance platforms) shall be designed to fit within the space envelope specified on the MDSs in section 2 of the purchasing documents.
- 3.1.9 Piping including supports shall be designed per the requirements of ASME B31.3 (Process Piping). Flanges used for connection to Buyer's piping shall be class 150 and meet the requirements of ASME B31.3.

- 3.1.10 The CFD model and analysis, thermal analysis, Activated Carbon Bed Adsorber analysis, and seismic analysis to be provided per this specification must verify that the final detailed design of the Activated Carbon Bed Adsorber and support frame meets the requirements set forth in this specification.
- 3.1.11 Each Activated Carbon Bed Adsorber Bed unit shall include all items listed or implied including, but not limited to, the following:
- Housing with inlet, outlet, support frame with anchorage provisions, platform supports, discharge filter receiver, piping connections and manifolds for testing and sampling, piping connections for pressure drop indication, insulation supports and hold-downs, lifting lugs, internal baffles, and mixing vanes (if mixing vanes required).
 - Fire suppression system, inlet and drain piping, shall be piped to equipment edge with flange.
 - Activated Carbon Bed Adsorbers, with pneumatic loading and gravity unloading of activated carbon.
 - Platform with grating and guardrails
 - (Optional) Monorail and Hoist system in lieu of activated carbon pneumatic loading.
- 3.1.12 All testing and sampling piping, connections, ports, and manifolds shall be permanently attached to the Activated Carbon Bed Adsorbers and easily accessible for shop and field testing. If required pipe length is not feasible within the space envelope or down stream of carbon bed isolation valves, the Seller shall supply mixing vanes/diffusers to adequately mix test gases in accordance with applicable code requirements. Refer to P&ID drawings in Section 2 of the MR for additional clarification on test port locations. The Seller shall work closely with the Buyer to determine best locations for testing and sampling piping, connections, ports, and manifolds.
- 3.1.13 The Activated Carbon Bed Adsorbers shall be designed for use with a bag-in/bag-out procedure to be developed by the Seller to facilitate adsorber removal and replacement operations. The Seller shall work closely with the Buyer on developing the bag-in/bag-out procedure.
- 3.1.14 The Activated Carbon Bed Adsorber shall be designed to attach insulation to the exterior of the pressure boundary. The design shall ensure the insulation is installed per the requirements of Buyer Specification 24590-WTP-3PS-NN00-T0001, *Thermal Insulation for Mechanical Systems* and section 4.3 of this specification.
- 3.1.15 Confinement of melter offgas is an ITS function of the activated carbon bed adsorber units for both HLW and LAW. Design of the pressure boundary and support frame shall ensure confinement of melter offgas during nominal, maximum, design conditions, and a carbon bed fire DBE. Pressure boundary must be maintained during and post an SC-III DBE.

3.2 Basic Function

3.2.1 General

3.2.1.1 Each offgas stream consists of two (2) Activated Carbon Bed Adsorbers that can be operated in either series or parallel with the ability to isolate one unit for maintenance during operation. During normal operation, the Activated Carbon Bed Adsorbers will operate in a lead/lag series arrangement.

3.2.1.2 The Activated Carbon Bed Adsorber units are located downstream of HEPA filter banks operating with a minimum particulate removal efficiency of 99%.

3.2.1.3 Each Activated Carbon Bed Adsorber unit shall consist of a vessel, connecting piping, air actuated on/off control valves, adsorber bed(s), insulation, water fire suppression system, and a discharge filter.

3.2.2 HLW Activated Carbon Bed Adsorber

3.2.2.1 HLW Activated Carbon Bed Adsorbers shall be used to remove mercury (Hg) from the HLW melter secondary offgas HOP system.

3.2.2.2 Each Activated Carbon Bed Adsorber vessel shall be designed with a Seller specified activated carbon media and number of beds to meet performance criteria specified in section 3.4 of this specification and the MDSs in section 2 of the purchasing documents.

3.2.3 LAW Activated Carbon Bed Adsorber

3.2.3.1 LAW Activated Carbon Bed Adsorber shall be used to remove mercury (Hg), iodine (I₂), HCl, and HF from the LAW melter secondary offgas LVP system.

3.2.3.2 Each Activated Carbon Bed Adsorber vessel shall be designed with a Seller specified activated carbon media and beds to meet performance criteria specified in section 3.4 of this specification and the MDSs in section 2 of the purchasing documents. The Seller may supply separate or mixed beds for acid gas removal.

3.3 Optional Electric Preheater

3.3.1 If determined necessary by Seller, to prevent condensate from forming in the activated carbon media during startup or after replacement, the Seller shall propose an electric preheater.

3.3.2 Electric preheater shall use an electric element and fan to preheat the carbon bed upon start-up or after media replacement.

3.3.3 The preheater shall be mounted on a 4 ft by 4 ft skid frame that must be located within the space envelope specified in the MDSs in section 2 of the purchasing documents.

3.3.4 Seller shall submit proposed control system and instrumentation for the preheater in accordance with Buyer specification 24590-WTP-3PS-JQ07-T0001 *Instrumentation for Package Systems*, and with the requirements of this specification.

3.4 Performance

3.4.1 General

- 3.4.1.1 The Activated Carbon Bed Adsorber units shall be designed for a minimum service life of 40 years. Where specific components cannot meet the specified service requirement, they shall be identified, and a mechanism for their replacement and/or maintenance shall be incorporated into the design. Refer to section 10.1.12 of this specification for additional component design reliability requirements.
- 3.4.1.2 The Activated Carbon Bed Adsorbers shall be designed for a minimum adsorbent life expectancy as required by the MDSs when operating 8,760 hours per year.
- 3.4.1.3 As applicable to design, the root mean square of the velocities in a traverse shall be within $\pm 20\%$ of the average velocity across the front face of the Activated Carbon Beds. If required, ports shall be provided on one foot intervals to confirm velocity distribution.
- 3.4.1.4 Instrumentation, valves, and related appurtenances shall meet the performance requirements of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems*.
- 3.4.1.5 Actuators for On/Off valves shall meet the performance requirements of Buyer specification 24590-WTP-3PS-JV15-T0001, *Actuators for On/Off Valves*.

3.4.2 HLW

- 3.4.2.1 Refer to MDSs in Section 2 of the purchasing documents for specified mercury decontamination factors (DF)/removal efficiencies and carbon media design life requirements.
- 3.4.2.2 Carbon media performance shall be affirmed by Buyer performed Warranty Testing specified in Appendix B of this specification.

3.4.3 LAW

- 3.4.3.1 Refer to MDS in Section 2 of the purchasing documents for specified mercury, iodine, HCl, and HF decontamination factors (DFs)/removal efficiencies and carbon media design life requirements.
- 3.4.3.2 Carbon media performance shall be affirmed by Buyer performed Warranty Testing specified in Appendix B of this specification.

3.5 Design Conditions

- 3.5.1 The Activated Carbon Bed Adsorber units shall be designed to meet design conditions specified in the MDSs in Section 2 of the purchasing documents.
- 3.5.2 The Activated Carbon Bed Adsorber units shall be considered non-ESF as defined in ASME AG-1, Article AA-1000.

- 3.5.3 The Activated Carbon Bed Adsorber units shall be designed to meet Level C service limits as defined in ASME AG-1, Paragraph AA-4214.

3.6 Environmental Conditions

- 3.6.1 The HLW and LAW Activated Carbon Bed Adsorber units will be installed indoors. See Equipment Environmental Qualification data, located in the MDSs, for additional room environmental conditions.
- 3.6.2 Prior to installation, the Activated Carbon Bed Adsorber units may be stored outdoors at ambient temperature extremes ranging from (-)35 °F dry-bulb to 118 °F dry-bulb and a relative humidity of 0 to 100%.
- 3.6.3 Control and electrical equipment required to meet ITS functions of confinement of melter offgas, bed isolation for fire suppression, and prevention of flooding of secondary offgas system on introduction of liquids (LAW only) shall be designed and fabricated to meet environmental qualifications in accordance with engineering specification 24590-WTP-3PS-IQ06-T0005, *Engineering Specification for Environmental Qualification of Control and Electrical Systems and Components*, for a harsh environment.
- 3.6.4 Control and electrical equipment shall be exposed to the room environment conditions listed on the Equipment Environmental Qualification data, located in the MDSs.
- 3.6.5 Mechanical equipment/components required to meet ITS functions of confinement of melter offgas, bed isolation for fire suppression, and prevention of flooding of secondary offgas system on introduction of liquids (LAW only) shall be designed and fabricated to meet environmental qualifications in accordance with engineering specification 24590-WTP-3PS-G000-T0015, *Engineering Specification for Environmental Qualification of Mechanical Equipment*, for a harsh environment.

3.7 Mechanical Requirements

3.7.1 General

- 3.7.1.1 Sample ports shall be provided downstream of each bed for monitoring HCl and HF.
- 3.7.1.2 Each carbon bed shall be equipped with three (3) vertical and three (3) horizontal ports to obtain physical samples at three locations within the bed. The Seller shall provide special tools to physically retrieve samples. Seller may also propose the use of cylindrical media samples located external to the housing.
- 3.7.1.3 Valves and actuators shall meet the requirements of Buyer specification 24590-WTP-3PS-PV00-T0001, *Technical Supply Conditions for Valves*, and 24590-WTP-3PS-JV15-T0001, *Actuators for On/Off Valves*. Valve type, fail position, material, and flange requirements shall be as specified on the MDSs in section 2 of the purchasing documents. Refer to P&ID 24590-HLW-M6-HOP-00011 and 24590-HLW-M6-HOP-20011 for HLW and P&ID 24590-LAW-M6-LVP-00004 for LAW.

3.7.2 Loading System

- 3.7.2.1 Pneumatic loading shall lift activated carbon media to the fill chute. The carbon media shall be gravity loaded through the fill chute.
- 3.7.2.2 Pneumatic loading system shall be complete with hopper, piping, vacuum blower, mounting equipment, and air filters necessary to safely lift the activated carbon adsorbent media. If determined necessary by Seller, vibration equipment shall be designed and supplied for loading of the carbon media into the Activated Carbon Bed Adsorbers.
- 3.7.2.3 The loading equipment shall be transferable to other Activated Carbon Bed Adsorber units within that facility. Rate of loading shall be specified by the Seller to minimize possible damage or degradation of the Activated Carbon Media.
- 3.7.2.4 Transferable loading equipment may be located in maintenance aisle ways as shown in the MDSs in section 2 of the purchasing documents. Location shall be specified by the Seller. Seller shall work closely with the Buyer with respect to equipment size.
- 3.7.2.5 If permissible in the equipment space envelope required on the MDSs, Seller may propose an alternative loading system using a monorail and hoist to lift carbon media super sacks for bulk loading. Monorail and hoist system shall be designed and tested in accordance with the applicable requirements of ASME B30.11, Monorails and Underhung Cranes and DOE-RL-92-36, Hanford Site Hoisting and Rigging Manual. Testing shall include the following at a minimum:
- Operational Test
 - Load Test

3.7.3 Unloading System

- 3.7.3.1 Spent carbon media shall be gravity unloaded directly into 55 gal drums for disposal. Seller shall allow for clearance of the 55 gal drum and bag-in/bag-out operations in accordance with applicable code requirements. If required to meet the space envelope specified in the MDSs, the Seller may propose the use an unloading system to elevate the carbon media into a 55 gal drum. Buyer prefers to use loading equipment for unloading.
- 3.7.3.2 If determined necessary by Seller, vibration equipment shall be designed and supplied for unloading of the carbon media.
- 3.7.3.3 Spent carbon is considered hazardous and potentially radioactive and must be contained during unloading through the use of a bag-out procedure as required in section 3.11 of this specification.

3.8 Discharge Filter Requirements

- 3.8.1 The discharge filters for the Activated Carbon Bed Adsorber units shall be rated for at least 300 °F with an efficiency of 99% at 5 microns and have a minimum capacity of two (2) times

the design flowrate. Each discharge filter shall also be equipped with a differential pressure gage to measure pressure drop across the filter.

3.9 Lifting Requirements

- 3.9.1 Lifting lugs shall be installed on each Activated Carbon Bed Adsorber unit for balanced lifting and handling. Seller shall identify the weight and center of gravity of each unit and submit a report for Buyer review.
- 3.9.2 All lifting points shall be designed and tested in accordance with the requirements of Buyer specification 24590-WTP-3PS-G000-T0003, *Packaging, Handling, and Storage Requirements*. The allowable design stress shall equal the applicable code allowable design stress at ambient temperature.
- 3.9.3 The lifting lugs shall be designed in accordance with ASME B30.20 - 1999 Below-The-Hook Lifting Devices, to permit lifting of the Activated Carbon Bed Adsorber units without distortion or damage to the components or lifting lugs.
- 3.9.4 Lifting lugs shall be accessible without removal of covers and guardrails.
- 3.9.5 The lifting lugs must accept standard lifting equipment. Chain blocks or braiding shall not be permitted. If applicable, the lifting lugs shall be designed to accept Crosby shackles or equivalent meeting Federal Specification RR-C-271D.
- 3.9.6 Sampling and testing connections and ports shall not be used for lifting.
- 3.9.7 Seller shall provide any special designed equipment that is required to handle the component and is not available from a commercial source. Such equipment may include but is not limited to rigging devices such as spreader beams, structural lifting devices, strongbacks, and yokes. Rigging devices shall be designed, tested, and tagged in accordance with the applicable requirements of DOE-RL-92-36, Hanford Site Hoisting and Rigging Manual.
- 3.9.8 All lifting points on the Activated Carbon Bed Adsorber units shall be proof tested in shop. Test and examination certificates shall be provided to the Buyer for review.

3.10 Loadings

- 3.10.1 The Activated Carbon Bed Adsorber and support frames shall be self-supporting, capable of carrying the static loads of components, thermal expansion loads (including Carbon bed fire), seismic loads, full flood fire suppression water loads, and capable of handling the stresses imposed during shipment, installation, and operation. Full flood fire suppression water loads are not required to be included in combination with the seismic loads.
- 3.10.2 Loads to be considered for the structural design of the Activated Carbon Bed Adsorbers and support frame shall be in accordance with applicable codes, standards, and reference documents listed in section 2 of this specification. As a minimum, loadings and stresses to be imposed shall meet Level C service limits as described in ASME AG-1, Paragraph AA-4214 and be in accordance with Buyer specification 24590-WTP-3PS-FB01-T0001, *Engineering*

Specification for Structural Design Loads for Seismic Category III and IV Equipment and Tanks.

- 3.10.3 Loads and stresses imposed for design of the vessel housings shall be in accordance with ASME Boiler and Pressure Vessel Code, Section VIII, Div. 1.
- 3.10.4 Nozzle design shall consider seismic, thermal, and combination loads. Loads shall be in accordance with the requirements of the MDSs in section 2 of the purchasing documents.

3.11 Bag-in/Bag-out Procedure Requirements

- 3.11.1 Seller shall provide a detailed bag-in/bag-out procedure using a pneumatic loading system and gravity unloading of the Activated Carbon Bed Adsorber media and discharge filters using PPE, bags, a glovebag (if required), and special tools. Procedure shall assume carbon bed is isolated and not in operation. If unloading system is used, Seller's bag-out procedure shall include this additional equipment.
- 3.11.2 Bag-in/bag-out procedure shall note the necessary steps needed to safely bag-out media after a water deluge (i.e. additional drying of media, vibration, etc.).
- 3.11.3 Procedure shall include proposed means of activated carbon adsorbent media delivery (i.e. 40 lb bags, 55 gal drums, etc.).
- 3.11.4 Seller shall work with Buyer to determine PPE requirements to be included in the procedure for personnel conducting adsorbent and filter removal and replacement.
- 3.11.5 If a glovebag is required to perform the bag-in/ bag-out procedure, it shall conform to AGS-G001, and ERDA 76-21, Paragraph 2.2.1 and Chapter 7. Seller shall work with Buyer to determine whether or not a glovebag will be necessary.
- 3.11.6 Drawings of bags and glovebag (if glovebag is required) to be used shall be included in the bag-in/bag-out procedure. Drawings shall show configuration with dimensions and identify any equipment, filters, either/or apparatus to be an integral part of the bags and glovebag. Drawings shall also identify material, manufacturer, either/or model numbers of all bag and glovebag components.
- 3.11.7 The bag-in/bag-out procedure shall be written to ensure that confinement is not broken at any time.
- 3.11.8 Personnel shall not need to break the plane of the pressure boundary or discharge filter access openings at any time to perform the bag-in/bag-out procedure.

3.12 CFD Model and Analysis Requirements

- 3.12.1 The 3-D CFD model, required per section 1 of this specification, shall demonstrate the effects of internal structures and components on offgas flow distribution through the Activated Carbon Bed Adsorbers.
- 3.12.2 The 3-D CFD model shall include the following components of the Activated Carbon Bed Adsorber units:

- Housing including inlet (with transition fittings and necessary inlet piping to model turbulent flow entering the unit), outlet, inlet plenum, outlet plenum, discharge filter, manifolds for testing and sampling, and any required internal baffles, mixing vanes, and/or cross-venting holes.
- Activated carbon bed(s).

3.12.3 The 3-D graphical results from the CFD model shall include:

- Analysis of changes to the Activated Carbon Bed Adsorber units to enhance offgas flow effectiveness.
- Analysis of the effect of including additional baffles, mixing vanes, and/or cross-venting holes as required to study local offgas flow effects to achieve uniform offgas flow distribution through the adsorbers.
- Analysis of changes to the Activated Carbon Bed Adsorber units to minimize the overall dimensions.

3.12.4 The 3-D graphical results from the CFD model shall demonstrate uniform offgas distribution through the adsorber beds at 75% of the design flowrate with $\pm 10\%$ variation in flowrate.

3.12.5 Provide pressure drop to velocity relationship per adsorber bed(s) as part of the CFD analysis based on carbon media testing.

3.12.6 The Seller shall provide the documented results from the 3-D CFD analysis in report form to the Buyer. The CFD report shall provide a complete offgas flow analysis and shall include 3-D graphical results of the model and any calculations performed. The reports shall, at minimum, include:

- Definition of analysis objective
- Identification of equipment for analysis
- General description of equipment supplemented by drawings and sketches
- Functional requirements per this specification
- Purpose of analysis
- Definition of design criteria and inputs with corresponding sources
- Results of literature searches and other applicable background data
- Applicable codes, standards, and reference documents per section 2 of this specification broken down by chapter, section, and paragraph, as applicable
- Analysis methodology
- Description of computer(s) used to conduct analysis
- Description of software/computer programs used for modeling and any calculations and limitations, justification for choice of program, and evidence and description of program validation method.
- Assumptions (indicate those that must be verified as the design proceeds)
- Analyses conducted with results
- Summary of analysis results
- Conclusions
- Location for Buyer review signatures

All assumptions shall be plainly identified and data present (including their uncertainty) with precise logic. Actual accomplishments of the work shall be clearly stated.

- 3.12.7 The final CFD report shall convey information to several disciplines, many of whom may be less familiar with the general subject than the authors. Care shall be taken to use simple statements and expressions and to make statements as concise as possible. If highly technical terms are necessary, they shall be adequately explained and defined.

3.13 Thermal Requirements

- 3.13.1 Refer to MDSs in section 2 of the purchasing documents for mechanical design data pertaining to thermal design information.
- 3.13.2 Thermal analyses shall include the effects of stresses resulting from potential variations in temperatures due to startup, normal operation, shutdowns, carbon bed fire, and thermal cycling of the Activated Carbon Bed Adsorber units. Analyses shall determine nozzle deflections in all directions per thermal expansion or other approved method. The calculations shall consider that the maintenance platforms shall be connected together with mechanical fasteners during normal operation.
- 3.13.3 Thermal analyses shall confirm the insulation temperature of Seller selected insulation and all exterior uninsulated portions of the Activated Carbon Bed Adsorber units with potential for personnel exposure, do not exceed 140 °F at maximum design temperature, in accordance with the requirements of Buyer specification 24590-WTP-3PS-NN00-T0001, *Thermal Insulation for Mechanical Systems*. Thermal calculations shall also confirm heat loss to the room is within the requirements of the MDSs. Refer to section 4.3 of this specification for addition insulation requirements.
- 3.13.4 The thermal analyses shall confirm the thickness and extent of insulation required on the bottom of the Activated Carbon Bed Adsorber units so that the average temperature of the Buyer's concrete foundation directly under and within three feet of the skid boundary does not exceed 100 °F.
- 3.13.5 Seller shall perform a thermal analysis to determine and define the thermal conditions generated during a carbon bed fire. This analysis shall define the maximum and design temperatures for the carbon bed pressure boundary and isolation valves. Seller shall determine equilibrium design temperature for a carbon bed fire based on Seller specified CO/CO_x analyzer set points and the carbon bed being isolated. This equilibrium design temperature shall be used in ASME Boiler and Pressure Vessel Code, Section VIII, Div.1 calculations for design of the Activated Carbon Bed Adsorber pressure boundary. If determined necessary, based on Seller operating procedures, operators shall have the option of activating the water deluge fire suppression system. Seller shall assume a minimum response time of one hour or any operator action. Design temperature determined by this thermal analysis shall confirm valve selection (valve material, seat material, leak tightness, etc.) for pressure boundary valves and process isolation valves.

3.14 Activated Carbon Bed Adsorber Design Analysis Requirements

- 3.14.1 The Seller shall conduct and submit separate Activated Carbon Bed Adsorber design analyses for LAW and HLW facilities. The design analysis of the Activated Carbon Bed Adsorber units shall be conducted by an Activated Carbon Bed Adsorber expert to determine the expected adsorbent changeout frequency for the final Activated Carbon Bed Adsorber design.

Seller shall provide personnel qualifications to the Buyer for review prior to beginning adsorber design.

- 3.14.2 Analysis shall be conducted considering operation of the Activated Carbon Bed Adsorber units at design conditions outlined in this specification and MDSs.
- 3.14.3 Analysis shall determine expected adsorbent changeout frequency based on the gas composition and load information specified in the MDSs in Section 2 of the purchasing documents.
- 3.14.4 Assume that the offgas flow through the Activated Carbon Bed Adsorbers may vary as much as $\pm 10\%$ from the design flowrate specified in the MDSs in section 2 of the purchasing documents.
- 3.14.5 Seller shall provide the documented results of the Activated Carbon Bed Adsorber analysis with any graphical results, as applicable, in report form to the Buyer prior to fabrication. Refer to section 3.12.6 and 3.12.7 for the minimum requirements of the report.
- 3.14.6 The final Activated Carbon Bed Adsorber design analysis report shall convey information to several disciplines, many of whom may be less familiar with the general subject than the authors. Care shall be taken to use simple statements and expressions and to make statements as concise as possible. If highly technical terms are necessary, they shall be adequately explained and defined.
- 3.14.7 LAW analysis shall include Buyer designed and installed Radar Guide Tube piping and supports as required per this specification and the MDS's.

3.15 Electrical Requirements

- 3.15.1 Electrical equipment necessary to meet the requirements of this specification and appendices shall be designed, fabricated, and tested in accordance with Buyer specification 24590-WTP-3PS-EKP0-T0001, *Electrical Requirements for Packaged Equipment*.
- 3.15.2 The Buyer will provide a single feed for each HLW Activated Carbon Bed Adsorber unit. The Seller shall be responsible for determining electrical load and for the distribution of power within the HLW Activated Carbon Bed Adsorber unit. The Seller shall provide a disconnect switch at the connection point for the Buyer's power feed for each Activated Carbon Bed Adsorber.
- 3.15.3 Delete
- 3.15.4 Motors shall operate continuously under running conditions at rated load and meet the requirements of Engineering Specification 24590-WTP-3PS-MUMI-T0002, *Low Voltage Induction Motors*.
- 3.15.5 The Buyer will provide a single feed for each LAW Activated Carbon Bed Adsorber unit to Buyer supplied electrical disconnect. The Buyer will be responsible for determining the electrical load and for the distribution of power within the LAW Activated Carbon Bed Adsorber unit.

3.16 Instrumentation and Control Requirements

3.16.1 General

- 3.16.1.1 Instrumentation included in the Seller's scope of work shall meet the requirements of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems*. For general instrumentation scope refer to P&ID 24590-HLW-M6-HOP-00011 and 24590-HLW-M6-HOP-20011 for HLW and P&ID 24590-LAW-M6-LVP-00004 for LAW.

For the HLW Activated Carbon Bed Adsorber Unit, the Buyer shall provide the appropriate ABB control system components (i.e. I/O modules, power supplies) to the Seller for fabrication into the Seller's control panel. Seller shall provide non-ABB manufactured equipment (fiber optic converters, fiber optic patch cables and plates, terminals, circuit breaker, wiring, etc.), and panel fabrication. Seller shall design their control panel to utilize the ABB control system equipment and provide a General Arrangement drawing with a Bill of Materials identifying all parts to be provided by the Buyer. Seller shall provide I/O list for all instruments. Seller shall provide control narrative, logic drawings, and related items as specified in 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems*. Buyer shall provide programming according to Seller's specification of the monitoring and control requirements. Buyer shall provide controller, software, and attend and support the factory test of the equipment at the Seller's facility.

For the LAW Activated Carbon Bed Adsorber unit, the Buyer shall provide all appropriate ABB and non-ABB control system components, control wiring, control panels, instrumentation racks, software, and programming.

- 3.16.1.2 Delete.

3.16.2 Activated Carbon Bed Adsorber

- 3.16.2.1 The following instruments shall be included with the HLW Activated Carbon Bed Adsorber Units as a minimum, refer to section 1.6 of this specification for additional QA with subsequent testing requirements for these instruments:

- Inlet temperature elements, thermowell, and indicating transmitter on inlet to each Activated Carbon Bed.
- Inlet CO analyzer sample collection tap and return for Buyer supplied ITS CO analyzer.
- Differential pressure indicating transmitter on each Activated Carbon Bed Adsorber vessel.
- Carbon Bed temperature elements, thermowells, and indicating transmitter. (two for each guard media and two for each primary media).
- Radar level indicator for each Activated Carbon Bed Adsorber vessel.
- Differential pressure indicating transmitter on each discharge filter.
- Outlet CO analyzer sample collection tap and return for Buyer supplied ITS CO analyzer.

- Delete.
- Mercury monitor sample tap from each Activated Carbon Bed Adsorber with common return for Buyer supplied mercury analyzer. See Figure 3 for Mercury monitor sample tap requirements.

See P&ID 24590-HLW-M6-HOP-00011 and 24590-HLW-M6-HOP-20011 for additional Seller and Buyer instrumentation and control scope.

3.16.2.2 The following instruments shall be included with the LAW Activated Carbon Bed Adsorber Units as a minimum, refer to section 1.6 of this specification for additional QA with subsequent testing requirements for these instruments:

- Two (2) Thermowells for Buyer supplied inlet temperature elements (ITS) and indicating transmitters on inlet piping.
- Two (2) inlet COx analyzer sample collection taps and returns for Buyer supplied ITS COx analyzer.
- Tap and return for Buyer supplied differential pressure indicating transmitter on each Activated Carbon Bed Adsorber vessel.
- Thermowell for Buyer supplied Carbon Bed temperature elements and transmitters. (4 total for each housing - two for guard media, two for primary media).
- Taps for two (2) Buyer supplied radar level indicators for each Activated Carbon Bed Adsorber vessel (ITS).
- Tap and return for Buyer supplied differential pressure instrument on each discharge filter (with ISA purges on each pressure leg).
- Thermowell for One (1) Buyer supplied outlet temperature element and indicator.
- Two (2) outlet COx analyzer sample collection taps and returns for Buyer supplied ITS COx analyzer.
- Mercury monitor sample tap from each Activated Carbon Bed Adsorber with common return for Buyer supplied mercury analyzer. See Figure 3 for Mercury monitor sample tap requirements.
- HF/HCl monitor sample tap and return tap for Buyer supplied HF/HCl analyzer.

See P&ID 24590-LAW-M6-LVP-00004 for additional Seller and Buyer instrumentation and control scope.

3.16.2.3 Deleted.

3.16.2.4 As listed in 3.16.2.1 and 3.16.2.2, each Activated Carbon Bed shall have at least four (4) temperature instruments and transmitters. Temperature elements shall be provided with thermowells that meet the inspection and testing requirements per the specified Q quality level and the requirements of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems*. Seller shall work closely with the Buyer in determining the location of the temperature instruments.

3.16.2.5 As listed in 3.16.2.1 and 3.16.2.2, each Activated Carbon Bed vessel shall have radar level indicator(s). Radar level indicators shall be Ohmart-Vega meeting Appendix B requirements of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Instrumentation for*

Package Systems. Seller proposed substitutions shall be well documented as to the relative technical advantages and exclude commercial considerations.

3.16.2.6 Seller shall provide control logic required to operate the Activated Carbon Bed Adsorber Units including the fire suppression system in accordance with the performance requirements of this specification and MDSs.

3.16.2.7 The HLW Activated Carbon Bed Adsorber Unit shall be designed with a single instrumentation tie-in point for connection to Buyer's Integrated Control Network (ICN) in accordance with the requirements of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems*. Design drawings shall show the location of instrumentation tie-in point. Instrumentation specified ITS shall have a separate tie-in point for connection to Buyer's Programmable Protection System (PPJ) in accordance with section 3.4.4 of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems*, and the requirements of IEEE Std. 384.

3.16.2.8 The following instrumentation for LAW and HLW are specified ITS and shall have isolated hardwires to Buyer's programmable protection system (PPJ) in accordance with the requirements of section 3.4.4 of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems for ITS instrumentation*, and the requirements of IEEE Std. 384.

- Inlet temperature elements for LAW Activated Carbon Bed Adsorbers
- Radar level indicators for LAW Activated Carbon Bed Adsorbers
- Control and electrical components related to HLW and LAW Activated Carbon Bed Adsorber pneumatic isolation valves. (Instrument air supply shall have two solenoid valves in series, one solenoid valve is independently hardwired for connection to Buyer's PPJ, the second solenoid valve is wired to the non-ITS control panel (HLW) or non-ITS instrumentation rack (LAW). All isolation valves are fail closed. (Refer to P&ID 24590-HLW-M6-HOP-00011 and 24590-HLW-M6-HOP-20011 for HLW and P&ID 24590-LAW-M6-LVP-00004 for LAW for additional information.
- Buyer supplied inlet and outlet CO analyzers for HLW. Buyer supplied inlet and outlet COx analyzers for LAW.

3.16.2.9 The following instrumentation shall meet the requirements of Buyer specification 24590-WTP-3PS-JQ06-T0005, *Environmental Qualification of Control and Electrical Systems and Components*.

- Inlet temperature elements for LAW Activated Carbon Bed Adsorbers
- Radar level indicators for LAW Activated Carbon Bed Adsorbers
- Control and electrical components related to HLW and LAW Activated Carbon Bed Adsorber pneumatic isolation valves
- Rupture Disks for LAW Activated Carbon Bed Adsorbers

3.16.2.10 LAW instrumentation shall be remote mounted in adjacent rooms.

3.16.2.11 Delete.

3.16.3 Optional Preheater

- 3.16.3.1 Seller shall propose control system for electric pre-heater with over heat protection in accordance with section 3.3 of this specification.
- 3.16.3.2 Proposed control system shall be in accordance with the requirements of Buyer specification 24590-WTP-3PS-JQ07-T0001, *Engineering Specification for Instrumentation for Package Systems*.

3.17 Accessibility and Maintenance

3.17.1 General

- 3.17.1.1 Accessibility and maintenance requirements shall be per this specification.
- 3.17.1.2 Seller's recommended accessibility and maintenance requirements for each piece of equipment shall be included in the Seller's applicable submittals.
- 3.17.1.3 Frequency of inspection and maintenance intervals shall be in accordance with Seller's recommendations.
- 3.17.1.4 All valves shall be accessible for maintenance and operation. Maintenance and replacement of valves shall be outlined in Seller's operation and maintenance procedures.
- 3.17.1.5 Seller shall design and supply any special tools required to perform maintenance activities and describe its use in applicable procedures.
- 3.17.1.6 If the equipment weight (i.e. valves, actuators, loading/unloading equipment, etc.) is in excess of 50 pounds the Seller shall design and supply jib cranes, lifting beams, or rigs in accordance with the requirements of DOE-RL-92-36.

3.17.2 Platform Requirements

- 3.17.2.1 Equipment, instrumentation, and electrical components that are 6 feet and over from ground level shall be provided with permanent work platforms with fixed ladders/stairs to perform maintenance.
- 3.17.2.2 The Activated Carbon Bed Adsorber unit maintenance platforms and ladders shall be designed to meet the requirements set forth in 29 CFR 1910, Occupational Safety and Health Standards (OSHA), Subpart D, Walking-Working Surfaces, and AISC 9th Edition.
- 3.17.2.3 The Activated Carbon Bed Adsorber unit maintenance platforms shall include guardrails. The guardrails shall be made out of piping.
- 3.17.2.4 The guardrails shall be designed per 29 CFR 1910.23.
- 3.17.2.5 The minimum live load for the column platforms shall be 100 psf. If platforms are to be used for laydown during maintenance, use a minimum live load of 250 psf.

- 3.17.2.6 The fixed ladder to be installed on the maintenance platforms shall meet the requirements set forth in 29 CFR 1910.27.
- 3.17.2.7 The maintenance platforms must be able to be attached to the Activated Carbon Bed Adsorber units without welding after the adsorbers are placed in the HLW and LAW facilities.
- 3.17.2.8 All openings in guardrails of each Activated Carbon Bed Adsorber unit maintenance platform shall have a safety gate or chain designed per the requirements of 29 CFR 1910.23.

4 Materials

4.1 General

- 4.1.1 Material used for the pressure boundary including control instrumentation shall comply with Buyer specification 24590-WTP-3PS-G000-T0002, *Positive Material Identification (PMI) for Shop Fabrication*. In accordance with the requirements of the PMI specification the Cr, Ni, Mo, content of the pressure boundary materials including weld consumables must be verified before and after fabrication.
- 4.1.2 Seller shall submit manufacturer cut sheets and MSDSs for all gaskets used for the pressure boundary. All gaskets, seal pads, caulks, and adhesives used must be certified for contact with austenitic stainless steel.
- 4.1.3 The Activated Carbon Bed Media shall have impurities less than 0.1 weight percent carbonate, oxide, or nitrate. Seller shall provide written certification that the amount of impurities in the carbon media is less than 0.1 weight percent carbonate, oxide, or nitrate.
- 4.1.4 Performance of the Activated Carbon Bed for removal of HCl, HF, and radioactive iodine (I^{129}) associated with the LAW system is required, (an HCl, HF, and iodine guard bed is not required for the HLW offgas). The guard bed for HF, located upstream of the mercury removal bed, may contain adsorbent such as acid washed activated carbon or activated alumina. The activated alumina media is not required to be acid washed.
- 4.1.5 The Activated Carbon Bed Media shall meet applicable ASTM methods for particle size distribution.

4.2 Construction

- 4.2.1 Materials used in the construction of the Activated Carbon Bed Adsorber units shall conform to the requirements of ASME AG-1, Article AA-3000, ASME AG-1a, Article HA-3000, this specification, and the MDSs in section 2 of the purchasing documents. Material property and performance data for any materials not covered in ASME AG-1, ASME AG-1a or this specification shall be submitted to the Buyer for review prior to incorporation into the design of the Activated Carbon Bed Adsorber units. All materials in contact with the adsorber and process piping shall be 300 series stainless steel. Performance data shall indicate that material is acceptable for environmental and specific service conditions.

- 4.2.2 All materials used in the construction of the Activated Carbon Bed Adsorber units shall be resistant to radiation levels indicated in subsection 3.6 of this specification and be able to operate under environmental and design conditions described in ASME N509 (paragraph 4.4) and MDSs in section 2 of the purchasing documents.
- 4.2.3 Seller shall maintain a record of ASME or ASTM numbers, material test reports, and manufacturer material certifications for all materials used for construction of the Activated Carbon Bed Adsorber units. Seller shall provide copies to the Buyer.
- 4.2.4 All materials used in the manufacture of the Activated Carbon Bed Adsorber units, support frames, and shims shall be new and unused. Where specific criteria are not provided, material selection shall be determined by the Seller and have properties and composition suitable for the specific service conditions and consistent with this specification.
- 4.2.5 Dissimilar metal couples shall be avoided due to corrosion potential.
- 4.2.6 Activated Carbon Bed Adsorber housing material shall be in accordance with the requirement of the MDSs. Discharge filter covers shall be constructed of 316 L stainless steel.
- 4.2.7 The Activated Carbon Bed Adsorber support frames, pipe supports, and maintenance platforms shall be made of Carbon Steel. Special attention shall be placed on securing the stainless steel carbon bed adsorbers and piping to the carbon steel support structure to prevent galvanic corrosion.
- 4.2.8 The discharge filter frame shall be composed entirely of 316 L stainless steel.
- 4.2.9 Deleted.

4.3 Insulation

- 4.3.1 The Seller shall provide detailed insulation installation procedures complete with sketches showing methods and details for applying and securing external insulation, metal jacketing, etc., to the Activated Carbon Bed Adsorber Units and necessary piping. The insulation procedures shall be in accordance with PIP INIH 1000 and NACE Standard RP0198, Buyer specification 24590-WTP-3PS-NN00-T0001 *Thermal Insulation for Mechanical Systems*, and this specification.
- 4.3.2 Procedures for insulation thicknesses greater than three (3) inches shall be applied in multiple layers with staggered joints. Each layer of multiple layer and double insulation shall be held in place separately.
- 4.3.3 Procedures for insulation installation shall include jacketing the insulation with 304 L stainless steel following the requirements of Buyer specification 24590-WTP-3PS-NN00-T0001 *Thermal Insulation for Mechanical Systems*, and this specification. The stainless steel jacketing shall be 0.024 inches thick flat and smooth sheet. The jacketing shall be furnished in the annealed or soft condition with a regular 2B mill finish and have a factory applied moisture barrier.
- 4.3.4 Seller shall recommend cements, mastics, and adhesives that will be suitable for the maximum design temperature of the Activated Carbon Bed Adsorber units. The mixing of cements,

mastics, etc., shall be done with deionized water. All recommended cements, mastics, adhesives must be certified for contact with austenitic stainless steel.

- 4.3.5 Procedures shall include cleaning instructions for surfaces to be insulated. Procedures should note that surfaces to be insulated must be dry and free of loose scale, dirt, and oil before the insulation is applied.
- 4.3.6 The design shall provide for removable/replaceable insulation on flanges, manholes, doors, and access openings.
- 4.3.7 All recommended insulation components, including facings, mastic, and adhesives, shall meet ASTM E84 fire hazard rating not to exceed 25 for flame spread and 50 for fuel contributed and smoke developed. Ratings used are determined by Underwriters Laboratories, Inc. (UL).

4.4 Piping

- 4.4.1 All applicable materials used for piping and related appurtenances shall be in accordance with the requirements of the MDSs and Buyer specification 24590-WTP-3PB-P000-TS11V *Piping Material Classification Pipe Class S11V*, for HLW, and Buyer specification 24590-WTP-3PB-P000-TS11N *Piping Material Classification Pipe Class S11N*, for LAW.
- 4.4.2 Special attention shall be placed on securing stainless steel piping to the carbon steel support structure to prevent galvanic corrosion.

4.5 Prohibited Materials

- 4.5.1 Mercury and other low melting point metals, their alloys, or materials containing such metals as their basic constituents shall not be used in the construction of the Activated Carbon Bed Adsorber units and shims.
- 4.5.2 Molybdenum and halides shall not be used in direct contact with stainless steel.
- 4.5.3 Asbestos shall not be included in any component of the Activated Carbon Bed Adsorber units.
- 4.5.4 Halide containing materials shall not be used in any component of the Activated Carbon Bed Adsorber units, unless otherwise noted in this specification.
- 4.5.5 Certain materials are restricted from use at WTP. Refer to 24590-WTP-LIST-CON-08-0001, *Restricted Materials List*, for the complete list of restricted materials. The use of any restricted materials requires authorization from WTP Safety Assurance.

4.6 Storage of Special Materials (e.g., stainless steel) prior to work

- 4.6.1 Stainless steel is susceptible to corrosion caused by the contact and interaction with incompatible materials. All stainless steel material shall be stored in separate areas away from other materials.

- 4.6.2 Storage of activated carbon and testing media shall be per the manufacturer's instructions to prevent contamination and degradation. Activated carbon and testing media storage requirements and instructions shall be provided by the Seller to the Buyer for review prior to purchase.

5 Fabrication

5.1 General Requirements

- 5.1.1 The Activated Carbon Bed Adsorber units shall be fabricated per this specification and the applicable documents listed in section 2 of this specification.
- 5.1.2 ASME Boiler and Pressure Vessel Code, Section VIII, Div. 1 shall only be applied to the fabrication of the housing pressure boundary of the Activated Carbon Bed Adsorber units. The housing pressure boundary shall be fabricated in accordance with ASME Boiler and Pressure Vessel Code, Section VIII, Div. 1. **U-stamp and National Board Registration for the Activated Carbon Bed Adsorbers are not required.**
- 5.1.3 Identification of fabrication methods shall be included in the detailed design of the Activated Carbon Bed Adsorber units.
- 5.1.4 All fabrication shall be performed by personnel qualified in accordance with this specification and applicable documents in section 2 of this specification.
- 5.1.5 Piping shall be fabricated in accordance with the requirements of ASME B31.3 and Buyer specification 24590-WTP-3PS-PS02-T0001, *Shop Fabrication of Piping*.

5.2 Assembly

- 5.2.1 Flatness of the completed Activated Carbon Bed Adsorbers and support frames shall be 1/8 inch per foot minimum, with no greater than 3/16 inch over the entire length, except for areas around cutouts. Areas around cutouts shall be flat within 1/16 inch per foot.
- 5.2.2 Cutout locations shall be within $\pm 1/8$ inch and cutout size shall be within $\pm 1/16$ inch.
- 5.2.3 The Activated Carbon Bed Adsorber units and shims shall have edges that are both smooth and not sharp to the touch.
- 5.2.4 The method of fabrication shall minimize the number and amount of seams, overlaps, or other discontinuities, which could trap radioactive contamination.

5.3 Tolerances

All tolerances, surface flatness, and finish requirements for assembly and fabrication shall be determined and specified by the Seller when completing the detailed design to meet performance requirements set forth in this specification. At a minimum, all tolerances, surface flatness, and finish requirements shall be per all applicable codes, standards, and reference documents in section 2 of this specification.

5.4 Welding

- 5.4.1 Seller shall develop detailed welding, weld inspection, NDE, and weld repair procedures for fabrication of the Activated Carbon Bed Adsorber units and submit them to the Buyer for review prior to fabrication. Procedures shall include acceptance criteria. The procedures shall conform to the following, as applicable:
- Buyer Specification 24590-WTP-3PS-SS00-T0001
 - Buyer Specification 24590-WTP-3PS-SS00-T0002
 - Buyer Specification 24590-WTP-3PS-NWP0-T0001
 - Buyer Specification 24590-WTP-3PS-MVB2-T0001 (Pressure Boundary Only)
 - ASME AG-1a, Article HA-6000
 - ASME AG-1, Articles FE-6000
 - ASME Boiler and Pressure Vessel Code, Section VIII, Div. 1 (Pressure Boundary Only)
 - ASME B31.3
 - AWS D1.6
- 5.4.2 Activated Carbon Bed Adsorber welding, weld inspection, NDE, and weld repair shall be carried out in accordance with the applicable procedures developed per the previous paragraph.
- 5.4.3 Activated Carbon Bed Adsorber welder qualifications shall be performed in accordance with requirements of the referenced specifications and codes listed in section 5.4.1 of this specification.
- 5.4.4 Welding or material manipulation shall be carried out indoors and only when the ambient, piping, or plate temperature is above 41°F, or higher where elevated temperatures are called for by a process.
- 5.4.5 Personnel performing Activated Carbon Bed Adsorber weld inspections shall be qualified in accordance with ASME AG-1, Paragraph AA-6335, ASME Boiler and Pressure Vessel Code, Section VIII, Div. 1, Buyer specification 24590-WTP-3PS-SS00-T0002, *Specification for Welding of Structural Stainless Steel and Welding of Structural Carbon Steel to Structural Stainless Steel* and 24590-WTP-3PS-SS00-T0001, *Specification for Welding of Structural Carbon Steel*.
- 5.4.6 Repairs required as a result of weld rejection by either the Seller's or Buyer's inspection shall be fully documented in accordance with Seller's Quality Assurance Program (QAP). Activated Carbon Bed Adsorber weld repairs shall be performed in accordance with ASME AG-1, subsubarticle AA-6330 and ASME Boiler and Pressure Vessel Code, Section VIII (housing pressure boundary only). Weld repair records shall be included with Seller's quality verification document package to be submitted to Buyer.
- 5.4.7 Joints and seams shall be fabricated in accordance with ASME AG-1a, subsubarticle HA-4330 and ASME Boiler and Pressure Vessel Code, Section VIII (housing pressure boundary only).
- 5.4.8 Welding procedures and welder qualification records shall be submitted to Buyer for review and permission to proceed prior to start of fabrication. Each procedure shall be prepared and

qualified in accordance with the requirements of the listed standards in section 5.4.1 of this specification.

- 5.4.9 Seller shall submit a weld verification report including a weld map which identifies the specific weld procedure and NDE procedure utilized for each weld joint.

5.5 Coating

- 5.5.1 Seller shall provide coating for carbon steel surfaces in accordance with 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*, Appendix D, Item # 8.20. System code D applies.
- 5.5.2 Coating finish color shall be in accordance with 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*, Appendix E, ANSI 70 Gray.
- 5.5.3 All carbon steel to stainless steel weld areas shall remain free of any zinc filled coatings, such as the P02 primer contained in system code D. Surfaces that were previously coated with zinc filled material, and subsequently ground off, are considered to be contaminated with zinc. Stainless steel shall not be welded to these surfaces.
- 5.5.4 Zinc filled coatings shall be held back from the carbon steel to stainless steel welds by 3 to 4 inches for shop welds and 4 to 5 inches for field welds. Coating hold back requirements are further defined in 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*, section 2.2.1.
- 5.5.5 The following coating materials may be applied directly to stainless steel surfaces:
- Sherwin Williams Macropoxy 646
 - Carboline Carbogard 890
- 5.5.6 Insulated surfaces (applicable only to carbon steel in contact with stainless steel) with an operating temperature no greater than 200 °F shall be coated with system code H (see 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*, Appendix C, Table 2, limited to the coating materials listed in section 5.5.5 above). The coating shall be applied to all carbon steel surfaces overlapping 1 inch on to the stainless steel. Insulated surfaces (applicable only to carbon steel in contact with stainless steel) with an operating temperature from 200 °F to 300 °F shall be coated with system code G (see 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*, Appendix C, Table 2). The coating material specified for use in system code G is not acceptable for direct application over stainless steel surfaces or stainless steel to carbon steel welds. Coat carbon steel surfaces with system code G to within 1-2 inches of the carbon steel-stainless steel weld. Do not overlap coating onto weld area or onto stainless steel material. Zinc primers without top-coating and hot dip galvanizing are not acceptable on surfaces that will be insulated.
- 5.5.7 Carbon steel components of gratings, platform assemblies, ladder assemblies, crane rail, and supports shall be hot dip galvanized in accordance with 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*, Appendix D, Note 15.

- 5.5.8 Components that are coated to manufacturer's standard shall be in accordance with 24590-WTP-3PS-AFPS-T0001, *Engineering Specification for Shop Applied Special Protective Coatings for Steel Items and Equipment*, section 6.2.1.2.

6 Tests and Inspections

6.1 General Requirements

- 6.1.1 The Activated Carbon Bed Adsorber units shall be tested and inspected per this specification, applicable documents listed in section 2 of this specification, and all appendices, addenda, and attachments. Seller shall submit shop and field test plans for Buyer review.
- 6.1.2 Seller shall conduct and be responsible for all testing and inspections required per this specification, applicable codes, applicable standards, and reference documents.
- 6.1.3 Seller shall submit a detailed test and inspection plan identifying all the inspections and tests planned, including recommended witness and hold points. Buyer's inspector will advise the Seller of witness and hold points and identify the shop tests that the Buyer intends to witness.
- 6.1.4 Seller shall develop and submit to Buyer detailed test procedures for conducting all shop and field acceptance testing required per this specification, applicable codes, standards, and reference documents for review by the Buyer prior to Activated Carbon Bed Adsorber fabrication. Procedures shall include acceptance criteria and detailed drawings of the shop and field testing configurations. Seller shall identify on drawings location of taps, ports, piping connections, and/or manifolds made on housing and ductwork in order to take measurements during shop and field tests. These taps, ports, piping connections, and/or manifolds shall be temporarily capped for use in the field during acceptance testing. Seller shall provide instructions on permanently sealing these taps after field acceptance testing. Drawings shall be scalable and shall include plan and elevation views of the following:
- Activated Carbon Bed Adsorber
 - Any Seller furnished materials, fittings, and ductwork required to perform the tests
 - Seller furnished discharge filter(s)
 - All Seller furnished equipment, apparatus, and instrumentation
- 6.1.5 Seller shall develop and submit to Buyer detailed testing and inspection procedures for conducting all testing and inspections required per this specification, applicable codes, standards, and reference documents for review by the Buyer prior to Activated Carbon Bed Adsorber fabrication.
- 6.1.6 Seller shall complete reports of all testing and inspections and submit them to Buyer. Reports shall identify the component tested, date performed, applicable test procedure, acceptance criteria, person performing the test or inspection, test results, and conclusions. Drawings of test setups shall be included. All testing and inspection results shall be certified.
- 6.1.7 Control and calibration of measuring and test equipment shall be in accordance with ASME AG-1, subarticle AA-5130.

- 6.1.8 All shop testing and inspection instruments used to conduct testing on the Activated Carbon Bed Adsorber units shall meet the requirements set forth in ASME AG-1, Article TA-3000. All testing and inspection instruments shall be in calibration and traceable to the appropriate national standard.
- 6.1.9 Any non-conforming work, in accordance with Seller's acceptance criteria, shall be redone by the Seller at Seller's cost.

6.2 Weld Testing and Inspection

- 6.2.1 Activated Carbon Bed Adsorber welds shall be inspected, examined, and tested in accordance with ASME AG-1, subarticle AA-6330, ASME Boiler and Pressure Vessel Code, Section VIII, Div. 1 (housing pressure boundary only), and Buyer specification 24590-WTP-3PS-MV00-T0001, *Pressure Vessel Design and Fabrication*.
- 6.2.2 Activated Carbon Bed Adsorber support frame welds shall be inspected, examined, and tested in accordance with Buyer specification 24590-WTP-3PS-SS00-T0002, *Engineering Specification for Welding of Structural Stainless Steel and Welding of Structural Carbon Steel to Structural Stainless Steel* and 24590-WTP-3PS-SS00-T0001, *Engineering Specification for Welding of Carbon Structural Steel*.
- 6.2.3 Piping shall be inspected, examined, and tested in accordance with ASME B31.3, Buyer specification 24590-WTP-3PS-PS02-T0001, *Shop Fabrication of Piping*, and Buyer specification 24590-WTP-3PS-NWP0-T0001, *General Welding and NDE Requirements for Supplier Fabricated Piping*.
- 6.2.4 As applicable, per code requirements, Seller shall submit Radiographic, Liquid Penetrant, and Ultrasonic Examination procedures for review, prior to fabrication.
- 6.2.5 Exposed radiograph film must be submitted along with technique and reader sheets. Film must be packaged in such a manner as to preclude moisture and handling damage.

6.3 Personnel Qualifications

- 6.3.1 All inspection and testing shall be performed by personnel qualified per the requirements set forth in this specification and all applicable documents in section 2 of this specification.
- 6.3.2 Seller shall submit personnel qualification documents, including years of experience for Seller's inspection and test personnel, for Buyer review.

6.4 Laboratory Tests

- 6.4.1 Seller shall conduct and be responsible for laboratory testing of Activated Carbon Media in accordance with appendix A of this specification. The laboratory test shall be conducted in accordance with the applicable sections of NQA-1. The test plan shall include a matrix cross-referencing the QA requirements to implementing procedures for the work and justifying elements that are not applicable.

- 6.4.2 Seller shall submit laboratory test plan and procedures for Buyer review prior to the start of testing in accordance with the requirements of the G-321-E in section 3 of the purchasing documents.
- 6.4.3 A final report shall be submitted for Buyer review in accordance with the requirements of section 10.7 of this engineering specification. The final report shall support the engineering design of the Activated Carbon Bed Adsorber Units. In addition to the requirements of section 10.7, the final report shall show conformance with required DFs as outlined in section 3.4 of this specification and specified in the MDSs. Any effects related to the design of the Activated Carbon Bed Adsorber Units shall be identified in the final report.
- 6.4.4 The Buyer shall be responsible for performing laboratory testing of the Activated Carbon Media in accordance with Appendix B & C of this specification. The Seller shall be responsible for the performance of the Activated Carbon Media in accordance with this specification and associated mechanical data sheet requirements. Seller shall review the Test Plan, Test Procedure, and Test Report and sign as a mandatory reviewer on these documents. Seller shall also be responsible for reviewing and signing as a mandatory reviewer on any revisions to the Test Plan, Test Procedure, and Test Report. For Appendix B testing, the Seller shall be responsible for participating in conference calls and meetings associated with testing progress reports and technical issues encountered during the test. Seller shall be available for an on site inspection and sign as a mandatory witness on a hold point pertaining to an equipment shakedown test of Appendix B test apparatus. The Seller shall provide a separate report, utilizing Appendix B & C laboratory report results, demonstrating that the equipment and carbon media delineated in this specification and associated mechanical data sheets, are met.

6.5 Shop Tests

- 6.5.1 Seller shall provide all materials, labor, tools, equipment, apparatus, instrumentation, testing media, and challenge gas to conduct all shop testing on the Activated Carbon Bed Adsorber units.
- 6.5.2 All shop tests requiring that adsorbent media be installed in the Activated Carbon Bed Adsorber units shall be conducted using activated carbon. The Seller shall ensure that the Activated Carbon Bed Adsorber does not become contaminated or degraded at any time before, during, or after completion of shop testing.
- 6.5.3 Testing media shall be loaded into adsorber cells and tested per applicable sections of ASME AG-1, Article FE-5000. Seller shall issue manufacturer's information for testing media to the Buyer for review prior to purchase.
- 6.5.4 Electrical and instrumentation tests shall be conducted in accordance with the requirements of Buyer specification 24590-WTP-3PS-EKP0-T0001, *Electrical Requirements for Packaged Equipment*, and 24590-WTP-3PS-JQ07-T0001, *Instrumentation for Package Systems*. Electrical and instrumentation test reports shall be submitted for Buyer review.
- 6.5.5 Seller shall conduct the following acceptance tests in the shop on each unit using air at ambient temperature, prior to shipment:

- Visual Inspection
- Structural Capability Test
- System Bypass Test
- Mechanical Test
- Differential Pressure Test
- Airflow Distribution Test
- Electrical Air Heater Performance Test (per design)

All Activated Carbon Bed Adsorber shop acceptance testing procedures shall conform to ASME AG-1 (Section TA), N509 (Section 9), N510, and ERDA 76-21 (Chapter 8).

- 6.5.6 Deleted.
- 6.5.7 The Activated Carbon Bed Adsorber pressure boundary shall be Bubble Tested per ASME Boiler and Pressure Vessel Code, Section V, Nondestructive Examination, Appendix I - Direct Pressure Technique. Sensitivity of the test shall not be less than 10⁻³ atm-ml/sec under test conditions.
- 6.5.8 Structural Capability Test: Conduct at pressure and conditions specified in the MDSs.
- 6.5.9 System Bypass Test: At $\pm 10\%$ of design flowrate through the Activated Carbon Bed Adsorber, challenge gas leakage rate shall not exceed 0.1 % at 99.9 % efficiency.
- 6.5.10 All test results shall be documented, certified, and submitted to the Buyer for review.

6.6 Site Tests

All Activated Carbon Bed Adsorber field acceptance testing procedures shall conform to ASME AG-1 (Section TA), N509 (Section 9), N510, and ERDA 76-21 (Chapter 8).

6.7 Bag-in/Bag-out Procedure Demonstration

- 6.7.1 Demonstration shall be conducted in Seller's shop on one (1) of the fully assembled Activated Carbon Bed Adsorber units and witnessed by Buyer's Representatives. The Activated Carbon Bed Adsorber to be used for the demonstration shall be chosen by the Buyer.
- 6.7.2 Demonstration shall include removal and replacement of one (1) activated carbon adsorber bed adsorbent and the discharge filter(s) for one (1) Activated Carbon Bed Adsorber unit for each HLW and LAW facility. Actual adsorber bed adsorbent to be removed shall be chosen by the Buyer.
- 6.7.3 When conducting the demonstration, Seller personnel shall be wearing all PPE required per the final bag-in/bag-out procedure.
- 6.7.4 Field conditions shall be simulated in the shop when performing the bag-in/bag-out procedure demonstration, which will include pulling a vacuum on the Activated Carbon Bed Adsorber, room clearance, and lifting constraints.

7 Preparation for Shipment

7.1 General Requirements

- 7.1.1 The Activated Carbon Bed Adsorber units shall be packaged/prepared for shipment, handled, and stored in accordance with Buyer specification 24590-WTP-3PS-G000-T0003 *Engineering Specification for Packaging, Handling, and Storage Requirements*, and ASME AG-1a, Article HA-7000, (Level C).
- 7.1.2 The activated carbon media shall be packaged/prepared for shipment, handled, and stored in accordance with Buyer specification 24590-WTP-3PS-G000-T0003 *Engineering Specification for Packaging, Shipping, Handling and Storage Requirements*, ASME AG-1, Article FE-7000 and FF-7000, (Level B).
- 7.1.3 The Activated Carbon Bed Adsorber units, activated carbon media, and shims shall not be packaged for shipping until all shop tests and inspections have been performed and the Buyer's Representative reviews the results.

7.2 Cleanliness

- 7.2.1 Cleanliness shall be per the applicable documents in Paragraphs 7.1.1 and 7.1.2 of this specification.
- 7.2.2 Solvents and cleaning solutions used on stainless steel shall have a halogen content of less than 200 ppm.

7.3 Tagging

- 7.3.1 Tagging of the Activated Carbon Bed Adsorber units shall be as specified in ASME AG-1, Article FE-9000 and ASME AG-1a, Article HA-9000. Tagged information shall also include associated plant item number specified in the data sheets that are in Section 2 of the purchasing documents.
- 7.3.2 A stainless steel nameplate shall be rigidly attached to the Activated Carbon Bed Adsorber units in a prominent position for ease of visibility and include:
- manufacturer's name
 - shop location
 - date of manufacture
 - serial number
 - equipment ratings (pressure, flow, temperature)
 - plant item number
 - weight of assembly
 - purchase order number
- 7.3.3 Nameplates shall be visible after the insulation is installed, or a duplicate nameplate shall be provided on the top of the insulation. Nameplate shall be located for easy access and reading.
- 7.3.4 All field testing materials and filters shall be tagged as required for field testing.

7.3.5 Seller shall use Buyer supplied tag numbers for valves, instrumentation, junction boxes, racks, and panels.

7.4 Documentation

7.4.1 Seller shall ensure that appropriate documentation is prepared and, if required, signed by the appropriate person(s). The shipping documentation shall accurately reflect specific traceability to the items being shipped.

7.4.2 Seller shall ensure that appropriate documentation is prepared for the Activated Carbon Bed Adsorber units, activated carbon, and shims. At a minimum, documentation shall include the following information, as applicable:

- Manufacturer name, model number, and serial number
- Plant Item Number

7.5 Shipment Preparation Instructions

7.5.1 Shipment of items shall be conducted in accordance with ASME AG-1a, Article HA-7300, Buyer specification 24590-WTP-3PS-G000-T0003 *Engineering Specification for Packaging, Handling, and Storage Requirements*.

7.5.2 The Activated Carbon Bed Adsorber units shall be shipped completely assembled except for activated carbon. Activated carbon shall be shipped separately.

7.5.3 Weatherproof shipping lists (two per packaged item) shall be prepared and submitted, and shall clearly identify the contents of each package sent to the Buyer. All submittals and shipping boxes shall be identified with the Buyer's purchase order number.

7.5.4 Seller shall provide a complete identification and location of temporary material contained within the equipment for shipment, handling, or storage that must be removed prior to commissioning (e.g., shipping blocks, desiccant bags, components shipped inside larger sections, etc.). In addition, the Seller shall provide instructions for removal of temporary materials, as required.

7.5.5 The Activated Carbon Bed Adsorber units and shims shall be mounted on skids, in crates, or in boxes as suited for the intended method of transport. Lifting weight and center of gravity shall be clearly marked on both the equipment and its shipping documents.

8 Quality Assurance

8.1 General Requirements

8.1.1 The Seller's QAP Requirements are included in Buyer specification 24590-WTP-3PS-G000-T0001, *General Specification for Supplier Quality Assurance Program Requirements*.

- 8.1.2 Seller's QAP Manual shall be submitted to Buyer for review in accordance with Buyer specification 24590-WTP-3PS-G000-T0001, *General Specification for Supplier Quality Assurance Program Requirements*.
- 8.1.3 Seller's QAP, as a minimum, shall contain the requirements detailed in the Supplier Quality Assurance Program Requirements Data Sheets listed in Section 2 of the purchasing documents.

8.2 Quality (Q) Related Components

- 8.2.1 Seller shall have in place a QAP meeting the requirements of ASME-NQA-1, marked as applicable in Supplier Quality Assurance Program Requirements Data Sheet attached to the purchasing documents, and Buyer specification 24590-WTP-3PS-G000-T0001, *General Specification for Supplier Quality Assurance Program Requirements*.
- 8.2.2 The successful bidder must pass a pre-award survey by the Buyer. Seller shall demonstrate that its quality program is in compliance with the procurement quality requirements listed in the Supplier Quality Assurance Program Requirements Data Sheet. The Seller shall allow the Buyer, its agent, and DOE access to their facility and records pertaining to this purchase order for the purpose of Quality Assurance (QA) Audits and Surveillance at mutually agreed times.
- 8.2.3 All items shall be manufactured in accordance with the Seller's QAP that meets the requirements of ASME NQA-1, and has been previously evaluated and accepted by the WTP Quality Organization.
- 8.2.4 Seller shall submit their QAP and work plan to Buyer for review prior to commencement of work. The plan shall include documents and procedures to implement the work and include a matrix of essential QA elements cross referenced with the documents/procedures.

8.3 Supplier Deviation

- 8.3.1 Each Supplier shall be required to identify and promptly document all deviations from the requirements of the procuring documents. In addition, the supplier shall be required to describe the recommended disposition based on appropriate analysis. Submittals of request for deviations from lower-tier suppliers shall be through the prime supplier to RPP-WTP.

Supplier-proposed deviations from procurement documents shall be initiated by use of Supplier Deviation Disposition Request (SDDR) form in section 2 of the purchasing documents.

9 Configuration Management

Equipment and or components covered by this specification are identified with Plant Item numbers shown in the MDSs. Each item shall be identified in accordance with Tagging in section 7 of this specification.

10 Documentation and Submittals

10.1 General

- 10.1.1 Seller shall submit to Buyer all detailed designs, documentation, procedures, instructions, calculations, analyses, laboratory results, models, manufacturer data, inspection plans and reports, test plans and reports, certifications, certificates, qualification records, manuals, MSDSs, video tapes, and drawings required per this specification, the applicable codes, standards, and reference documents in section 2 of this specification, and the purchasing documents.
- 10.1.2 All detailed designs, drawings, shop drawings, supporting calculations, supporting analyses, support models, procedures, instructions, manufacturer data, operation manuals, and maintenance manuals shall be issued to the Buyer for review prior to manufacture of the Activated Carbon Bed Adsorber units, special tools, and/or the purchase of special tools, filters, and gaskets.
- 10.1.3 Seller shall submit storage requirements and instructions for Buyer's review.
- 10.1.4 Seller shall submit to Buyer Engineering and Quality Verification documents in the forms and quantities shown in Form G-321-E, Engineering Document Requirements, and Form G-321-V, Quality Verification Document Requirements attached to the purchasing documents.
- 10.1.5 Seller shall submit a report identifying any deviations and/or conflicts per Section 2 of the purchasing documents to the Buyer for review.
- 10.1.6 Each documentation transmittal package shall have a documentation inventory sheet attached listing all documents and the number of pages each.
- 10.1.7 MDSs in Section 2 of the purchasing documents and motor data sheets shall be marked-up by the Seller and submitted to the Buyer for review with the detailed design. Seller shall fill in all information that is marked with an asterisk (*) and mark-up actual overall Activated Carbon Bed Adsorber dimensions based on the detailed design.
- 10.1.8 Seller shall provide all operation manuals (include media changeout operations and any media conditioning requirements), maintenance manuals, initial setup and startup instructions, special tools, and spare parts lists for Activated Carbon Bed Adsorber components, as applicable.
- 10.1.9 Provide nominal and maximum inlet and outlet nozzle loadings, deflections, and moments in all directions for Activated Carbon Bed Adsorber units per thermal and seismic analysis results.
- 10.1.10 Provide Activated Carbon Bed Adsorber unit support and anchorage design load analyses including seismic, thermal, and combination loads.
- 10.1.11 Provide MSDS for Seller's recommended challenge gas.
- 10.1.12 The Seller shall provide equipment reliability figures for all major components and sub-components of the Carbon Bed Adsorber system. The definition of components and sub-

components is at the vendor's discretion. The reliability figures shall include, as a minimum, the following:

- Failure rate, or mean time between failure (whichever is available)
- Estimated modes of failure (example, Drive gear failure, motor burnout, brake failure, etc.). This may be delineated in a FMEA. The method used to perform the FMEA (example, MIL-STD-1629) and the year shall be specified. In addition, all assumptions used to perform the FMEA shall be stated.
- Recommended maintenance and frequency, as applicable
- Estimated time to perform the recommended maintenance, as applicable

The data above shall be based on the physical and environmental conditions delineated in this specification. Where possible, the seller shall compare the figures for the equipment in this specification to similar equipment sold and serviced by the vendor. The source for all estimates and any underlying assumptions shall be stated. If software is used to perform the FMEA, the seller shall specify the software used and the version (example software, Relx, Isogen, Reliasoft, etc.)

- 10.1.13 Provide installation manual per the requirements of engineering specification 24590-WTP-3PS-G000-T0003, *Packaging, Handling, and Storage Requirements*.
- 10.1.14 Provide site handling and storage instructions per the requirements of section 3.9 and engineering specification 24590-WTP-3PS-G000-T0003, *Packaging, Handling, and Storage Requirements*.
- 10.1.15 All analyses shall be submitted in accordance with the requirements of 24590-WTP-3PS-G000-T0014, *Engineering Specification for Supplier Design Analyses*.

10.2 Drawings

- 10.2.1 Seller shall provide all drawings required per this specification and the applicable documents in section 2 of this specification.
- 10.2.2 All drawings shall be produced per the drawing practices set forth in ASME Y14.100, *Engineering Drawing Practices*.
- 10.2.3 Seller shall submit drawings and diagrams for Buyer's review prior to fabrication, and/or purchase of appurtenance equipment. Drawing and diagram submittals shall include as a minimum, but are not limited to, the following:
- Outline drawings showing dimensions, services, insulation, and foundation and mounting details.
 - Outline drawing showing electrical and instrumentation tie-in points.
 - Outline drawing showing locations of piping connections with nozzle schedule, including sizes of piping connections with nominal and maximum nozzle loadings, deflections, and moments in all directions.
 - Insulation detail drawing(s) mapping installation
 - Overall piping and instrumentation diagram (P&ID) for the Activated Carbon Bed Adsorber Units using Buyers supplied instrumentation and equipment tag numbers.

- Interconnection diagram showing details of all internal connections and Buyer external connections, including required location and sizes of wiring connections (including other connections to Buyer's control system).
- Overall single line diagram (wiring diagram) showing all electrical equipment and wiring in the Activated Carbon Bed Adsorber Unit.
- Control logic diagrams showing input signal paths required to accomplish a response.
- Assembly drawings with sufficient information and detail to facilitate assembly of the component parts of an equipment item.
- Shop detail drawings that provide information and detail to facilitate fabrication, manufacture, or installation.

10.3 30% Design Review

10.3.1 Seller shall conduct a 30 % design review with the Buyer. Seller shall submit all drawings, procedures, calculations, laboratory testing results, analyses, and information necessary to conduct the 30 % design review to the Buyer for review.

10.3.2 Finalized outline dimensions of the Activated Carbon Bed Adsorber units shall be included in the 30 % design review. Finalized dimensions shall, at a minimum, include the following:

- Overall dimensions and size for Activated Carbon Bed Adsorber units
- P&IDs
- Control logic diagrams
- Activated Carbon Bed Adsorber unit inlet and outlet nozzle locations
- Discharge filter location and size
- Testing port and manifold locations and size
- Adsorber cell overall dimensions
- Mounting details (anchor size, location, layout, etc.)
- Preliminary bag-in/bag-out plan
- Fire water inlet and drain locations and sizes

10.4 90% Design Review

Seller shall conduct a 90 % design review with the Buyer. Seller shall submit all drawings, procedures, calculations, analyses, and information necessary to conduct the 90 % design review to the Buyer for review.

10.5 Calculations

All calculations to be provided shall be orderly, complete, and sufficiently clear to permit verification. The body of the calculations shall include:

- A concise statement of the purpose of the calculation
- Input data, applicable criteria, and stated assumptions
- A list of references used, including drawings, codes, standards, and computer programs (indicate the version or issue date)
- A discussion of rationale used for design assumption basis
- Equations used for all computations

- Numerical calculations including identification of units used
- A concise statement addressing the calculation results and/or recommendations
- A table of contents for complex calculations

10.6 Schedules

- 10.6.1 A detailed schedule of laboratory testing, engineering, document submittals, material purchases, fabrication, shop tests, and shipment shall be submitted.
- 10.6.2 All procedures and instructions shall be completed and submitted to the Buyer a minimum of eight (8) weeks prior to Activated Carbon Bed Adsorber shipment.

10.7 Reporting Appendix A Test Results

A test plan and supporting documentation (operating procedures, materials and testing equipment control lists, analytical procedures) must provide a full record of the testing requirements, testing equipment configuration, operating conditions, assumptions, and any other relevant information. In addition to, or consistent with, the test plan content required by the Quality Assurance Project Plan for RPP-WTP, current revision, the test plan shall include directly or by reference (as appropriate) the following information:

- **Document Number** – Test plan number in the document header.
- **Document Hierarchy** – Statement in the test plan text referencing the governing test specification.
- **Background** – Summary level discussion of past results and current data needs that provide context and relevancy of the testing to the WTP Project.
- **Test Prerequisites** – Definition and/or reference of laboratory testing, engineering analyses, small-scale testing needed to support testing.
- **Test Conditions** – Test variables and operating conditions (e.g., duration of operations at steady state conditions, range of equipment operating conditions, process flows, pressures, temperatures, differential pressures, etc.) identified in tables or other efficient formats.
- **Sample Data Requirements** – A table listing the sample type, location, frequency, number of replicates, and planned analyses to be performed. Minimum data accuracy requirements shall be addressed.
- **Test Modifications** – Test Plan shall contain a statement defining how changes or modifications in operations or testing will be documented in the “desk copy” or similar controlling documentation during the test and who has the authority to authorize changes or modifications depending on the significance of the change.
- **Equipment Configuration Record** – The equipment configuration for the test or document reference where the configuration can be found. Statement defining where any changes or modifications to the baseline equipment will be recorded, e.g., laboratory record book.
- **M&TE** – A list identifying measuring and test equipment (M&TE) used to collect data to meet Test Specification requirements, data reported to the project in the summary report or other data reporting formats, and M&TE relied upon for control or modeling purposes. Accuracy and sensitivity achievable for each instrument.

- **Supporting Procedures** – A list of applicable technical and operating procedures or a referenced document that contains the list of documents required for operating the test equipment and associated support systems, sample preparation and analytical procedures, etc.
- **Unique Sample Identification** – Description of or document reference defining method to label, store and maintain samples.
- **Reporting and Analyses Requirements** – Process data that will be obtained and reported, Rate versus time, average temperature versus time, and analyses are required to satisfy each test objective. Planned data analyses, e.g., comparison to theoretical or published predictions, empirical fitting, etc., required to meet objectives.
- **Personnel Qualification** – List of any special training needs.
- **Quality Assurance** – Statement identifying applicable quality assurance requirements. Any exceptions to the approved quality assurance plan shall be described.

A final report shall be submitted within 60 days of completing testing and sample analyses. Test report content shall include (compatible with the individual test objectives):

- Approval sheet signed by the principal investigator, data validation peer reviewer, and project manager,
- Summarize the tests performed, including the date of the tests, and applicable test specification and test plan,
- Provide a clear description of the purpose of the test and state how the completed test met that purpose,
- Describe the unit operations in which the tests were performed and contrast test conditions with planned operating conditions of the RPP-WTP, as appropriate,
- Present and discuss test results and compare against the “success” criteria. Discuss whether or not the findings of the test performed are consistent with previous test reports, whether the expected WTP design or operational conditions are appropriate for the system, or have implications for safety, permitting, or operability,
- Data collected and its acceptability,
- Actions taken in connection with any nonconformances noted,
- Identification of the measuring and test equipment used during the test,
- Describe deviations from the approved test plan, or expected configuration conditions, that occurred during the conduct of the test,
- Comprehensive list of all samples providing the date/time of sampling, sample type, and sample label,
- Data tables listing monitored parameter values.
- A discussion of how the test results validate equipment sizing and performance.

11 References

11.1 Incorporated Design Changes

- 24590-WTP-3PN-MWK0-00001

- 24590-WTP-SDDR-PROC-05-00701
- 24590-WTP-SDDR-M-05-00018
- 24590-WTP-SDDR-MS-07-00051

11.2 Design Changes Incorporated by Reference

- 24590-WTP-SDDR-M-06-00286
- 24590-WTP-SDDR-M-06-00287

Figure 1 Deleted

Deleted.

Figure 2 Deleted

Deleted.

Figure 3 Mercury Gas Monitor Probe Flange Connection

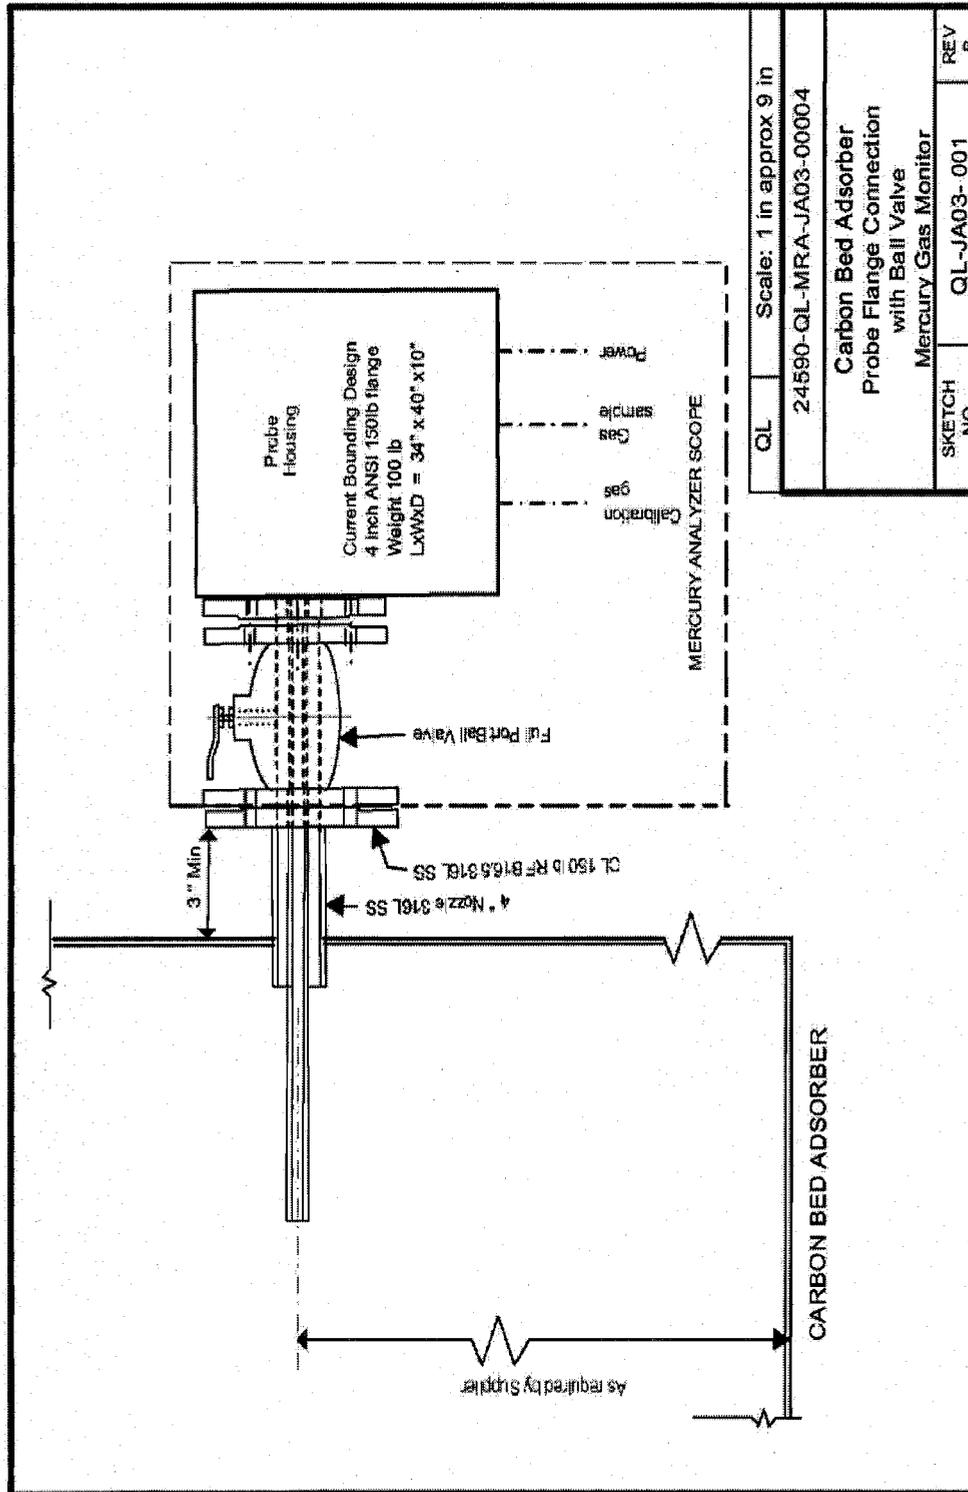


Table 1 Quality Level List (HLW)

QUALITY LEVEL

COMPONENT TAG NO:
24590-HLW-MV-HOP-ADBR-00091AB
24590-HLW-MV-HOP-ADBR-00092AB

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
Inlet Air Slot	D8168-1	Air Slot with Sample Holes	D8168-1	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-2	Air Slot without Sample Holes	D8168-2	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-3	Vertical Channel LH	12GA SHT 316L SS	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-4	Vertical Channel RH	12GA SHT 316L SS	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-5	Horizontal Channel	12GA SHT 316L SS	20	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-6	Lower Channel	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-7	Upper Channel	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-8	Vertical Flat Bar (118)	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-9	Vertical Flat Bar (123.53)	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-10	Blanking Washer	12GA SHT 316L SS	3	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-11	Perforated Sheet (22.38)	20GA SHT 316L SS	10	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8168-12	Perforated Sheet (10.44)	20GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8170-1	Vertical Channel	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8170-2	Horizontal Channel	12GA SHT 316L SS	10	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8170-3	Lower Channel	12GA SHT 316L SS	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8170-4	Upper Channel	12GA SHT 316L SS	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
D8170-5	Vertical Flat Bar	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.	
D8170-6	Perforated Sheet (22.38)	20GA SHT 316L SS	10	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.	
D8170-7	Perforated Sheet (10.44)	20GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.	
Exit Air Slot	D8171-1	Air Slot with Sample Holes	D8168-1	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8171-2	Air Slot without Sample Holes	D8168-2	1	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8171-3	Vertical Channel	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8171-4	Horizontal Channel	12GA SHT 316L SS	20	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8171-5	Lower Channel	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.
	D8171-6	Upper Channel	12GA SHT 316L SS	2	CM	No	Does not function to contain meter offgas. This part forms part of the carbon media screen.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	U./CM	GBD	COMMENTS
	D8317-5	Sling (11200H)	McMaster - Carr	4	CM	No	Does not function to contain meter offgas. External to the pressure boundary and is considered a non-permeate piece of plant equipment. Used only for handling the equipment during transportation and installation.
	D8317-6	Name Plate (4.00 X 7.00)	11GA SHIT 304L SS	2	CM	No	Does not function to contain meter offgas. External to the pressure boundary and is considered a non-permeate piece of plant equipment. Used only for handling the equipment during transportation and installation.
D8574 Inlet Pipe Support Assy	D8574-1	1-Beam	6 X 12 5# IRRS ASTM A-36	1	CL	Yes	
	D8574-2	Angle (34.62)	2 X 2 X 1/4 ANGLE ASTM A-36	1	CL	Yes	
	D8574-3	Plate (22.35)	1/4 PL 316L SS	1	CL	Yes	
	D8574-4	Plate (21.35)	1/4 PL 316L SS	1	CL	Yes	
	D8574-5	Plate (4.00)	1/4 PL 316L SS	4	CL	Yes	
	D8574-6	Plate (7.00)	1/4 PL 316L SS	2	CL	Yes	
	D8574-7	Plate (2.75)	1/4 PL 316L SS	2	CL	Yes	
	D8574-8	Hex HD Bolt (2.0)	1/2-13 UNC 316 SS	4	CL	Yes	
	D8574-9	Lock Washer	1/2-13 316 SS	4	CL	Yes	
	D8574-10	Hex Nut	1/2-13 UNC 316 SS	4	CL	Yes	
	D8574-11	2inch Supporter	Glass	6	CL	Yes	
	C9883 VA-3000 CO ANALYZER	1	Water Caloriser	PVC	6	CL	Yes
2		Sensor Valve	PVC	6	CL	Yes	
3		Filter	304 SS	12	CL	Yes	
4		Pump		6	CL	Yes	
5		Thermo-Electric Dehumidifier		12	CL	Yes	
6		Needle Valve	PVC	12	CL	Yes	
7		Flow Meter	Glass	12	CL	Yes	
8		CO Analyzer Unit		6	CL	Yes	
9		Chiller		6	CL	Yes	
10		Filter		6	CL	Yes	
11		PUMP		6	CL	Yes	
12		Solenoid Valve (2-Way)		12	CL	Yes	
13		Rotameter W/ Valve		6	CL	Yes	
14		Solenoid Valve (3-Way)		6	CL	Yes	
15		Ball Valve (2-Way)		18	CL	Yes	
16		Ballhead Fitting (3/8 x 3/8)		20	CL	Yes	
17		Needle Valve		6	CL	Yes	
18		Flow Meter		6	CL	Yes	
19		Ballhead Fitting (1/4 x 1/4)		4	CL	Yes	
20	1/4 inch Tee		6	CL	Yes		
21	Vacuum Switch		20	CL	Yes		
22	VA-3001 Sample Sample System		6	CL	Yes		
23	VA-3000 Analyzer		6	CL	Yes		
24	1/2 inch Fitting	PVC	APR	CL	Yes		
25	3/8 inch PTFE Teflon Tubing	PTFE	APR	CL	Yes		
26	1/4 inch PTFE Teflon Tubing	PTFE	APR	CL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D8183-18	Round Guard Edge 8"	D8183-20	12	QL	Yes	
	D8183-19	Common 1/4" ID	D8183-21	2	QL	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge filter.
	D8183-21	Discharge Filter RT/S Plate	D8186	1	CM		
	D8183-22	Slide Gate Assembly	D8215-2	5	QL	Yes	
	D8183-23	Lifting Lug	D8216	4	CM	No	Does not function to contain meter offgas. Lifting lugs do not form part of the pressure boundary and are only used to handle the loadings for transportation and installation.
	D8183-24	Plate (120 82)	1/4 PL 316L SS	8	QL	Yes	
	D8183-25	Plate (120)	1/4 PL 316L SS	8	QL	Yes	
	D8183-26	Plate (84)	1/4 PL 316L SS	2	QL	Yes	
	D8183-27	Plate (62)	3/8 PL 316L SS	20	QL	Yes	
	D8183-28	Plate (62)	3/8 PL 316L SS	8	QL	Yes	
	D8183-29	Beam (131 88)	6 X 12 S # HRB	6	QL	Yes	
	D8183-30	Beam (120)	6 X 12 S # HRB	2	QL	Yes	
	D8183-31	Beam (84 3)	6 X 12 S # HRB	2	QL	Yes	
	D8183-32	Flange T.O.E. (145)	1/2 SCH 40 316L SS	1	QL	Yes	
	D8183-33	Flange T.O.E. (12)	2 SCH 40 316L SS	1	QL	Yes	
	D8183-34	Pipe (23 62)	2 SCH 40 316L SS	1	QL	Yes	
	D8183-35	Pipe (18 00)	2 SCH 40 316L SS	1	QL	Yes	
	D8183-36	Pipe (3 00)	2 SCH 40 316L SS	12	QL	Yes	
	D8183-37	Pipe (6 88)	6 SCH 40 316L SS	8	QL	Yes	
	D8183-38	Pipe (6 38)	6 SCH 40 316L SS	2	QL	Yes	
	D8183-39	Pipe (6 38)	6 SCH 40 316L SS	1	QL	Yes	
	D8183-40	Weld Neck Flange	1/4 SCH 40 316L SS	2	QL	Yes	
	D8183-41	Slip-on Flange	6 X 150# 316L SS	1	QL	Yes	
	D8183-42	Weld Neck Flange	1/4 X 150# 316L SS	4	QL	Yes	
	D8183-43	90° Elbow	2 SCH 40 316L SS	2	QL	Yes	
	D8183-44	Hex Hd Bolt	HEX HD BOLT (175)	24	QL	Yes	
	D8183-45	85° End Flange	D8183-22	2	QL	Yes	
	D8183-46	Door Flange	D8183-23	2	QL	Yes	
	D8183-47	Re-Bar Flange	D8183-24	2	QL	Yes	
	D8183-48	Round Bar	1/4 DIA ROUND BAR 316L SS	AIR	CM	No	Does not function to contain meter offgas. This round bar is used to help hold a bag in place during a discharge filter bag-in-bag-out operation.
	D8183-49	Pipe Support Assy	D8225-1	1	QL	Yes	
	D8183-50	Pipe Support Assy	D8225-2	2	QL	Yes	
	D8183-51	Reinforcement PL (17.0 OD)	3/8 PL 316L SS	3	QL	Yes	
	D8183-52	Reinforcement PL (15.5 OD)	3/8 PL 316L SS	1	QL	Yes	
	D8183-53	Reinforcement PL (16 OD)	3/8 PL 316L SS	2	QL	Yes	
	D8183-54	Reinforcement PL (4.00 OD)	3/8 PL 316L SS	3	QL	Yes	
	D8183-55	Pipe Support Assy	D8524	1	QL	Yes	
	D8183-56	Plug	3/8 PL 316L SS	1	QL	Yes	
	D8183-57	Back Panel	3/8 PL 316L SS	1	QL	Yes	
	D8183-58	Front Panel	3/8 PL 316L SS	1	QL	Yes	
	D8183-59	Front Panel	3/8 PL 316L SS	2	QL	Yes	
	D8183-60	Bottom Panel	3/8 PL 316L SS	1	QL	Yes	
	D8183-61	Top Panel	3/8 PL 316L SS	1	QL	Yes	
	D8183-62	Top Panel w/ Hole	3/8 PL 316L SS	1	QL	Yes	
	D8183-63	Top Panel	3/8 PL 316L SS	1	QL	Yes	
	D8183-64	Top End Panel	3/8 PL 316L SS	2	QL	Yes	
	D8183-65	Inset End Panel	3/8 PL 316L SS	2	QL	Yes	
	D8183-66	Outlet End Panel	3/8 PL 316L SS	1	QL	Yes	
	D8183-67	Outlet End Panel	3/8 PL 316L SS	1	QL	Yes	
	D8183-68	Hopper Side Main Bed	3/8 PL 316L SS	8	QL	Yes	
	D8183-69	Hopper Side Main Bed Panel	3/8 PL 316L SS	8	QL	Yes	
	D8183-70	Hopper End Main Bed Panel	3/8 PL 316L SS	8	QL	Yes	
	D8183-71	Hopper End Guard Bed Panel	3/8 PL 316L SS	8	QL	Yes	

D8186
Housing W/ALD/MT
Details

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
08196	D8196-15	Hopper Bottom Panel	3/8 PL 316L SS	8	QL	Yes	
	D8196-16	Manway Flange	3/4 PL 316L SS	5	QL	Yes	
	D8196-17	Manway Cover	1/2 PL 316L SS	2	QL	Yes	
	D8196-18	Reinforcement Plate 10"	3/4 X 1 RECT BAR 316L SS	2	QL	Yes	
	D8196-19	Reinforcement Plate 1/4"	3/4 X 1 RECT BAR 316L SS	2	QL	Yes	
	D8196-20	Reinforcement Plate 8"	3/4 X 1 RECT BAR 316L SS	12	QL	Yes	
	D8196-21	Chimney 10" ID	3/8 PL 316L SS	2	QL	Yes	
	D8196-22	Bag Coll Flange	3/4 PL 316L SS	2	QL	Yes	
	D8196-23	Door Flange	3/4 X 3 RECT BAR 316L SS	2	QL	Yes	
	D8196-24	Re-Bar Flange	1 X 3 RECT BAR 316L SS	2	QL	Yes	
	D8196-1	Plate (32.88)	1/4 PL 316L SS	1	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge fillers.
	D8196-2	Plate (33.39)	1/4 PL 316L SS	1	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge fillers.
	D8196-3	Plate (23.75)	1/4 PL 316L SS	1	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge fillers.
	D8196-4	Plate (21.25)	1/4 PL 316L SS	4	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge fillers.
	D8196-5	2-Bar (6.19)	1/2 GA SHRT 316L SS	2	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge fillers.
	D8196-6	2-Bar (6.59)	1/2 GA SHRT 316L SS	2	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge fillers.
	D8196-7	SHIP	2/3 GA SHRT 316L SS	4	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge fillers.
	D8196-8	Pull Rod	1/8 GA SHRT 316L SS	2	CM	No	Does not function to contain meter offgas. This is used to help remove the discharge fillers during the top-rip-out operation.
	D8216 Slider Gate Assembly	D8216-1	Pin	8 SCH 40 316L SS	1	QL	Yes
D8216-2		Flange	1 PLATE 316L SS	1	QL	Yes	
D8216-3		Flange	1 PLATE 316L SS	1	QL	Yes	
D8216-4		Slide	7 GA SHRT 316L SS	1	QL	Yes	
D8216-5		O-Ring	1/4 DIA SOLID NBR O-RING	1	QL	Yes	
D8216-6		Hex HD Bolt	3/4-10 UNC 316 SS	8	QL	Yes	
D8216-7		Hex Nut	3/4-10 UNC 316 SS	8	QL	Yes	
D8216-8		Lock Washer	3/4 LD 316 SS	8	QL	Yes	
D8217-1		Assembly	D8175	1	QL	Yes*	The pipe coupling object out as part of this assembly functions to contain meter offgas, therefore, the whole assembly is designated TTS. * For item D8217-1 should refer to drawing D8175 for the safety / quality designation and CGD requirements.
Housing Weldment		D8188-1	Back Panel	D8188-1	1	QL	Yes
	D8188-2	Front Panel	D8188-2	1	QL	Yes	
	D8188-3	Bottom Panel	D8188-3	1	QL	Yes	
	D8188-4	Top Panel	D8188-4	1	QL	Yes	
	D8188-5	Top Panel White	D8188-5	1	QL	Yes	
	D8188-6	Top Panel	D8188-6	1	QL	Yes	
	D8188-7	Top Panel	D8188-7	1	QL	Yes	
	D8188-8	Top End Panel	D8188-8	2	QL	Yes	
	D8188-9	Inlet End Panel	D8188-9	1	QL	Yes	
	D8188-10	Outlet End Panel	D8188-10	1	QL	Yes	
	D8188-11	Hopper Size Main Bed	D8188-11	8	QL	Yes	
	D8188-12	Hopper Size Guard Bed Panel	D8188-12	8	QL	Yes	
	D8188-13	Hopper End Main Bed Panel	D8188-13	8	QL	Yes	
	D8188-14	Hopper End Guard Bed Panel	D8188-14	8	QL	Yes	
	D8188-15	Hopper Bottom Panel	D8188-15	8	QL	Yes	
	D8188-16	Manway Flange	D8188-16	2	QL	Yes	
	D8188-17	Reinforcement Plate 16"	D8188-17	2	QL	Yes	
	D8188-18	Reinforcement Plate 14"	D8188-18	4	QL	Yes	

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QLCH	CGD	COMMENTS
	D8217-19	Reinforcement Flange B"	D8186-20	12	QL	Yes	
	D8217-20	Cylinder 18" I.D.	D8186-21	2	QL	Yes	
	D8217-21	Discharge Filter MTS Plate	D8196	1	CM	No	Does not function to contain meter offgas. This is the internal rack used to hold the discharge filters.
	D8217-22	Slide Gate Assembly	D8215-2	3	QL	Yes	
	D8217-23	Lifting Lug	D8215	4	CM	No	Does not function to contain meter offgas. Lifting lugs do not form part of the pressure boundary and are only used to handle the bearings for transportation and installation.
	D8217-24	Pipe (28.62)	1/4 PL 316L SS	8	QL	Yes	
	D8217-25	Pipe (1.28)	1/4 PL 316L SS	8	QL	Yes	
	D8217-26	Pipe (6.9)	1/4 PL 316L SS	2	QL	Yes	
	D8217-27	Pipe (6.25)	3/8 PL 316L SS	3	QL	Yes	
	D8217-28	Pipe (6.5)	3/8 PL 316L SS	20	QL	Yes	
	D8217-29	Beam (131.88)	6 X 12.5 # HRS	8	QL	Yes	
	D8217-30	Beam (12)	6 X 12.5 # HRS	8	QL	Yes	
	D8217-31	Beam (64.5)	6 X 12.5 # HRS	2	QL	Yes	
	D8217-32	Pipe T.O.E (4.5)	1/2 SCH 40 316L SS	1	QL	Yes	
	D8217-33	Pipe T.O.E (12)	2 SCH 40 316L SS	1	QL	Yes	
	D8217-34	Pipe (23.62)	2 SCH 40 316L SS	1	QL	Yes	
	D8217-35	Pipe (18.00)	2 SCH 40 316L SS	1	QL	Yes	
	D8217-36	Pipe (3.00)	2 SCH 40 316L SS	1	QL	Yes	
	D8217-37	Pipe (8.98)	8 SCH 40 316L SS	12	QL	Yes	
	D8217-38	Pipe (6.98)	8 SCH 40 316L SS	9	QL	Yes	
	D8217-39	Pipe (6.98)	14 SCH 40 316L SS	1	QL	Yes	
	D8217-40	Weld Neck Flange	2 X 100# 316L SS	2	QL	Yes	
	D8217-41	Slip-on Flange	6 X 100# 316L SS	12	QL	Yes	
	D8217-42	Weld Neck Flange	14 X 150# 316L SS	4	QL	Yes	
	D8217-43	90° Elbow	2 SCH 40 316L SS	2	QL	Yes	
	D8217-44	Hex Hd Bolt (1.73)	HEX HD BOLT (1.73)	24	QL	Yes	
	D8217-45	Hex Hd Bolt	D8188-22	2	QL	Yes	
	D8217-46	Cone Flange	D8186-23	2	QL	Yes	
	D8217-47	Re-Bar Flange	D8186-24	2	QL	Yes	
	D8217-48	Round Bar	1/4 DIA ROUND BAR 316L SS	AWR	CM	No	Does not function to contain meter offgas. This round bar is used to help hold a bag in place during a discharge filter bag change-out operation.
	D8217-49	Flange Support Assy	D8226-1	1	QL	Yes	
	D8217-50	Pipe Support Assy	D8226-2	2	QL	Yes	
	D8217-51	Reinforcement PL (17.00)	3/8 PL 316L SS	3	QL	Yes	
	D8217-52	Reinforcement PL (15.00)	3/8 PL 316L SS	1	QL	Yes	
	D8217-53	Reinforcement PL (18.00)	3/8 PL 316L SS	2	QL	Yes	
	D8217-54	Reinforcement PL (4.00)	3/8 PL 316L SS	3	QL	Yes	
	D8217-55	Flange	3/8 PL 316L SS	1	QL	Yes	
	D8218-1	Weld Neck Flange	8 X 316 HRS ASTM A-36	2	QL	Yes	
	D8218-2	Weld Neck Flange	9 X 316 HRS ASTM A-36	4	QL	Yes	
	D8218-3	Weld Neck Flange	10 X 316 HRS ASTM A-36	6	QL	Yes	
	D8218-4	Weld Neck Flange	10 FL HRS ASTM A-36	6	QL	Yes	
	D8218-5	Weld Neck Flange	4 X 5 # HRS ASTM A-36	2	QL	Yes	
	D8218-6	Weld Neck Flange	4 X 5 # HRS ASTM A-36	1	QL	Yes	
	D8220-1	Flat Bar (181.5)	1/2 X 2 1/2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meter offgas. Ladders and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D8220-2	Flat Bar (35.5)	1/2 X 2 1/2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meter offgas. Ladders and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D8220-3	Flat Bar (6.5)	1/2 X 2 1/2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meter offgas. Ladders and all associated parts are external to the pressure boundary and form part of the maintenance platform.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
08223 Housing Assembly	D8223-4	Flat Bar (10.25)	1/4 X 2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller odors. Ladder and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D8223-5	Pipe	3/4 BAR CS	16	CM	No	Does not function to contain meller odors. Ladder and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D8223-6	Flat Bar (13.06)	1/4 X 2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller odors. Ladder and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D8223-7	Flat Bar (8.00)	1/4 X 2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller odors. Ladder and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D8223-8	Housing Weldment Unit A	D8183	1	QL	Yes	
	D8223-9	Manway Cover	D8188-17	2	QL	Yes	
	D8223-10	Slack Gate Assembly	D8215	8	QL	Yes	
	D8223-11	Access Door Discharge Filter	D8224	2	QL	Yes	
	D8223-12	Carbon Sample Plug Assembly	D8284	3	QL	Yes	
	D8223-13	Electrical Enclosure/gauge panel assembly Unit A	D8285	1	QL	Yes	PCIT's contain a small amount of meller odors making the pressure boundary function of the PCITs an ITS function. This makes the assembly ITS. * For Item# D8222-6 should refer to drawing D8285 for the safety / quality description and CGD requirements.
	D8223-14	Blind Flange Modified	8 X 10.99 316L SS	3	QL	Yes	
	D8223-15	Blind Flange	8 X 15.99 316L SS	6	QL	Yes	
	D8223-16	Pipe Plug	1 1/4 X 15.00 316L SS	3	QL	Yes	
	D8223-17	Pipe Coupling	1 1/4 X 30.00# 316L SS	3	QL	Yes	
	D8223-18	Pipe Coupling	1 1/2 X 30.00# 316L SS	1	QL	Yes	
	D8223-19	Flange T.O.E. (8.36)	1/2 SCH 40 316L SS	5	QL	Yes	
	D8223-20	Flange T.O.E. (18.39)	1/2 SCH 40 316L SS	2	QL	Yes	
	D8223-21	Thermostat (27")	B8309-2	1	QL	Yes	
	D8223-22	Thermostat (46")	B8309-3	4	QL	Yes	
	D8223-23	Thermostat (66")	B8309-4	4	QL	Yes	
	D8223-24	Temperature Element (27")	2804100-015	1	CM	No	Additional Protection Class (APC), may be purchased as commercial component.
	D8223-25	Temperature Element (46")	2804100-015	4	CM	No	Additional Protection Class (APC), may be purchased as commercial component.
	D8223-26	Temperature Element (66")	2804100-015	4	CM	No	Additional Protection Class (APC), may be purchased as commercial component.
	D8223-27	Temperature Element (86")	2804100-015	1	CM	No	Additional Protection Class (APC), may be purchased as commercial component.
D8223-28	Reader Level Detector	2804100-017	1	QL	Yes		
D8223-29	Main Valve 1/2"	2804100-019	6	QL	Yes		
D8223-30	Main Valve 2"	2804100-020	1	QL	Yes		
D8223-31	Casket B/C Door 3/8TH x 1WD	Silicone Closed Cell Sponge	17L	QL	Yes		
D8223-32	Gasket B' Flange		12	QL	Yes		
D8223-33	Gasket Manway 3/8TH x 1WD		2	QL	Yes		
D8223-34	Hex Nut	1/2-13UNC 316 SS	24	QL	Yes		
D8223-35	Hex Nut	3/4-10UNC 316 SS	24	QL	Yes		
D8223-36	Hex HD Bolt (2.5)	3/4-10UNC 316 SS	32	QL	Yes		
D8223-37	Hex HD Bolt (3.5)	3/4-10UNC 316 SS	192	QL	Yes		
D8223-38	Flat Washer	1 1/2 ID, 316 SS	24	QL	Yes		
D8223-39	Flat Washer	3/4 ID, 316 SS	224	QL	Yes		
D8223-40	DEL ETD						
D8223-41	Scrub Valve 12"	2804100-022	1	QL	Yes		
D8223-42	Housing Weldment Unit B	E8017	1	QL	Yes		
D8223-43	Manway Cover	D8188-17	2	QL	Yes		
D8223-44	Slack Gate Assembly	D8215	8	QL	Yes		
D8223-45	Access Door Discharge Filter	D8224	2	QL	Yes		
D8223-46	Carbon Sample Plug Assembly	B8284	3	QL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QLCM	CGD	COMMENTS
	D0223-6	Electrical Enclosure/gauge panel 400 Volt A	D0226	1	QL	Yes	Part's contain a small amount of metal offgas making the pressure boundary function of the Part is an IT's function. This makes the assembly IT's. For Item D0223-6 would refer to drawing D0225 for the safety / quality designation and CGD requirements.
	D0223-7	Blind Flange Modified	8 X 1024 316L SS	3	QL	Yes	
	D0223-8	Blind Flange	8 X 1024 316L SS	9	QL	Yes	
	D0223-9	Blind Flange	1 1/4 X 3004 316L SS	3	QL	Yes	
	D0223-10	Flange Coupling	1 1/4 X 3004 316L SS	3	QL	Yes	
	D0223-11	Flange Coupling	1 1/2 X 3004 316L SS	5	QL	Yes	
	D0223-12	Flange Coupling	1 1/2 X 3004 316L SS	2	QL	Yes	
	D0223-13	Flange Coupling	1 1/2 X 3004 316L SS	2	QL	Yes	
	D0223-14	Flange Coupling	1 1/2 X 3004 316L SS	4	QL	Yes	
	D0223-15	Flange Coupling	1 1/2 X 3004 316L SS	4	QL	Yes	
	D0223-16	Flange Coupling	1 1/2 X 3004 316L SS	4	QL	Yes	
	D0223-17	Temperature Element (2")	2004100-015	1	CM	No	Additional Protection Class (APC) may be purchased as commercial component
	D0223-18	Temperature Element (4")	2004100-015	4	CM	No	Additional Protection Class (APC) may be purchased as commercial component
	D0223-19	Temperature Element (6")	2004100-015	1	CM	No	Additional Protection Class (APC) may be purchased as commercial component
	D0223-20	Radar Level Detector	2004100-017	1	QL	Yes	
	D0223-21	Manual Valve 1/2"	2004100-019	9	QL	Yes	
	D0223-22	Ball Valve 2"	2004100-020	1	QL	Yes	
	D0223-23	Gasket B.O. Door 30THK x 1WD	Silicone Coated Cell Storage	12R	QL	Yes	
	D0223-24	Gasket B" Flange		12	QL	Yes	
	D0223-25	Gasket Manway 3/8THK x 1WD		2	QL	Yes	
	D0223-26	Hex Nut	1/2-13 UNC 316 SS	24	QL	Yes	
	D0223-27	Hex Nut	3/4-16 UNC 316 SS	224	QL	Yes	
	D0223-28	Hex HD Bolt (2.5)	3/4-16 UNC 316 SS	32	QL	Yes	
	D0223-29	Hex HD Bolt (3.5)	3/4-16 UNC 316 SS	192	QL	Yes	
	D0223-30	Flat Washer	1/2 ID 316 SS	24	QL	Yes	
	D0223-31	Flat Washer	3/4 ID 316 SS	224	QL	Yes	
	D0223-32	DELTED	2004100-022	1	QL	Yes	
	D0223-33	Stainless Valve 1/2"	316 PL 316L SS	1	QL	Yes	
	D0224-1	Plate-1	316 PL 316L SS	2	QL	Yes	
	D0224-2	Plate-2	316 PL 316L SS	2	QL	Yes	
	D0224-3	Plate-3	316 PL 316L SS	2	QL	Yes	
	D0224-4	Flat bar-1	3/4 X 2 RECT BAR 316L SS	2	QL	Yes	
	D0224-5	Flat bar-2	3/4 X 2 RECT BAR 316L SS	2	QL	Yes	
	D0224-6	Flat bar-3	1/4 X 2 RECT BAR 316L SS	1	CM	No	Does not function to contain melter offgas. This bar is used to make a lifting lug for the access door. Does not function to contain melter offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D0226-1	Beam(25')	4 X 7.7# HRS ASTM A-36	1	CM	No	
	D0226-2	Square Tube (81.25')	4 X 4 X 1/4 WT HRS	4	CM	No	Does not function to contain melter offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D0226-3	Square Tube (113.75')	4 X 4 X 1/4 WT HRS	9	CM	No	Does not function to contain melter offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D6226-4	Angle (5.00)	2 X 2 X 1/4 WT HRS	7	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-5	Angle (3.00)	2 X 2 X 1/4 WT HRS	2	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-6	Angle (3.00)	2 X 2 X 1/4 WT HRS	2	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-7	Flat Bar (6.00)	1/4 X 2 FL HRS ASTM A-36	1	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-8	Flat Bar (67.56)	1/4 X 2 FL HRS ASTM A-36	2	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-9	Plate (3.00 X 4.00)	1/4 PL HRS ASTM A-36	1	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-10	Plate (6.00 X 8.00)	1/4 PL HRS ASTM A-36	3	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-11	Plate (6.00 X 9.00)	1/4 PL HRS ASTM A-36	1	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-12	Plate (7.00 X 7.00)	1/4 PL HRS ASTM A-36	8	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-13	Hex HD Bolt (2.00)	1/2-13UNC GR 8 PL	30	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-14	Hex Nut	1/2-13UNC GR 8 PL	20	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-15	Lock Washer	1/2 NOM ID GR 8 PL	20	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6226-16	Electric Hoist	McMaster - Carr	1	CM	No	Does not function to contain media offgas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
D6226	D6226-1	Pipe Support with Gusset	D6226-1	1	QL	Yes	
Pipe Support Assembly	D6226-2	Pipe Support without Gusset	D6226-2	1	QL	Yes	
	D6226-3	I-Beam	6 X 12.6H HRS ASTM A-36	2	QL	Yes	
	D6226-4	Angle	2 X 2 X 1/4 WT HRS ASTM A-36	1	QL	Yes	
	D6226-5	Plate (1.50 X 7.00)	1/4 PL 316L SS	2	QL	Yes	
	D6226-6	Plate (0.50 X 1.50)	1/4 PL 316L SS	4	QL	Yes	

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QLCM	CGD	COMMENTS
03550	D0228-7	Sheet	1/8" SFT 316L SS	2	QL	Yes	
	D0228-8	Sheet	1/2" 130RC X 3.0 IG 316L SS	4	QL	Yes	
	D0228-9	Std Beveled Washer	1/2" S SS	4	QL	Yes	
	D0228-10	Hex Nut	1/2" 130RC 316 SS	4	QL	Yes	
Platform Assembly	D0250-1	Channel (23.28 X 128.00)	316 PL HRS ASTM A-36	2	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-2	Channel (11.4 X 272.00)	316 PL HRS ASTM A-36	3	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-3	Channel (9.9 X 91.25)	316 PL HRS ASTM A-36	3	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-4	Channel (9.9 X 28.50)	316 PL HRS ASTM A-36	10	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-5	Channel (11.4 X 6.00)	316 PL HRS ASTM A-36	6	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-6	Pipe (278.40)	1 1/2 SCH 40 CS	2	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-7	Pipe (60.40)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-8	Pipe (19.40)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-9	Pipe (71.95)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-10	Pipe (48.13)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-11	Pipe (40.50)	1 1/2 SCH 40 CS	6	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-12	Pipe (40.50)	1 1/2 SCH 40 CS	4	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-13	Pipe (41.95)	1 1/2 SCH 40 CS	4	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	08250-14	Pipe (68.75)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-15	Pipe (68.10)	1 1/2 SCH 40 CS	3	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-16	Pipe (59.23)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-17	Pipe (65.23)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-18	Pipe (27.48)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-19	Pipe (16.48)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-20	Angle (6.00 X 7.70)	3/16 PL HRS ASTM A-36	2	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-21	Plate (7.00 X 7.00)	1/4 PL HRS ASTM A-36	8	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-22	Plate (5.50 X 7.00)	1/4 PL HRS ASTM A-36	2	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-23	Plate (3.5 X 7.00)	1/4 PL HRS ASTM A-36	6	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-24	Hook (3.00)	1/4 DIA BAR HRS ASTM A-36	2	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-25	Bracket (2.26)	1/4 X 2 FL HRS ASTM A-36	4	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-26	Plate (2.81 X 17.50)	3/16 PL HRS ASTM A-36	8	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	08250-27	Plate (2.81 X 5.62)	3/16 PL HRS ASTM A-36	3	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.

24590-WTP-3PS-MWKO-T0001, Rev 4
 Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D0250-28	Flat Bar (27.8 50)	1/4 X 4 FL HRS ASTM A-36	2	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-29	Flat Bar (124 00)	1/4 X 4 FL HRS ASTM A-36	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-30	Flat Bar (68 75)	1/4 X 4 FL HRS ASTM A-36	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-31	Flat Bar (28 50)	1/4 X 4 FL HRS ASTM A-36	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-32	Cham (28 00)	3/16 304L SS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-33	Cham (62 60)	3/16 304L SS	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-34	Grating (25 12 WD X 99 0 LG)	1 1/2 X 3/16 BEARING BAR	3	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-35	Grating (25 12 WD X 75 0 LG)	1 1/2 X 3/16 BEARING BAR	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-36	Grating (28 60 WD X 75 0 LG)	1 1/2 X 3/16 BEARING BAR	3	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-37	Grating (29 88 WD X 28 5 LG)	1 1/2 X 3/16 BEARING BAR	6	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-38	Angle (28 50)	1 1/2 X 1 1/2 X 3/16 ASTM A-36	2	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-39	Angle (63 26)	1 1/2 X 1 1/2 X 3/16 ASTM A-36	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-40	Angle (91 26)	1 1/2 X 1 1/2 X 3/16 ASTM A-36	1	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D0250-41	Channel (6 50 X 63 26)	3/16 PL HRS ASTM A-36	3	CM	No	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
Platform Assembly	0825-0-42	Grooving Retainer Plate (3.00 X 4.00)	316 PL HRS ASTM A-36	12	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-1	Channel (23.28 X 126.00)	316 PL HRS ASTM A-36	2	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-2	Channel (11.4 X 272.50)	316 PL HRS ASTM A-36	3	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-3	Channel (9.9 X 31.25)	316 PL HRS ASTM A-36	3	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-4	Channel (9.9 X 28.56)	316 PL HRS ASTM A-36	10	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-5	Channel (11.4 X 6.00)	316 PL HRS ASTM A-36	6	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-6	Pipe (278.40)	1 1/2 SCH 40 CS	2	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-7	Pipe (30.40)	1 1/2 SCH 40 CS	1	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-8	Pipe (19.40)	1 1/2 SCH 40 CS	1	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-9	Pipe (7.65)	1 1/2 SCH 40 CS	1	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-10	Pipe (46.15)	1 1/2 SCH 40 CS	1	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-11	Pipe (40.50)	1 1/2 SCH 40 CS	6	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	0825-1-12	Pipe (40.50)	1 1/2 SCH 40 CS	4	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
0825-1-13	Pipe (41.56)	1 1/2 SCH 40 CS	4	CM	No.	Does not function to contain meter or gas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.	

24590-WTP-3 PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QLCM	CGD	COMMENTS
	D6251-14	Pipe (58.75)	1 1/2 SCH 40 CS	1	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-15	Pipe (58.75)	1 1/2 SCH 40 CS	6	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-16	Pipe (59.25)	1 1/2 SCH 40 CS	1	CM	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-17	Pipe (45.25)	1 1/2 SCH 40 CS	1	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-18	Pipe (27.48)	1 1/2 SCH 40 CS	1	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-19	Pipe (16.48)	1 1/2 SCH 40 CS	1	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-20	Angle (6.00 X 7.75)	316 PL HRS ASTM A-36	2	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-21	Plate (7.00 X 7.00)	1/4 PL HRS ASTM A-36	8	CM	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-22	Plate (6.50 X 7.00)	1/4 PL HRS ASTM A-36	2	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-23	Plate (3.5 X 7.00)	1/4 PL HRS ASTM A-36	6	CH	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-24	Hook (3.00)	1/4 DIA BAR HRS ASTM A-36	2	CM	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-25	Bracket (2.25)	1/4 X 3 PL HRS ASTM A-36	4	CM	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-26	Plate (2.81 X 17.50)	316 PL HRS ASTM A-36	8	CM	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-27	Plate (2.81 X 5.62)	316 PL HRS ASTM A-36	9	CM	No	Does not function to contain melter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY.	OL/CM	CGD	COMMENTS
	D6251-28	Flat Bar (26.50)	1/4 X 4 FL HRS ASTM A-36	2	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-29	Flat Bar (24.00)	1/4 X 4 FL HRS ASTM A-36	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-30	Flat Bar (29.75)	1/4 X 4 FL HRS ASTM A-36	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-31	Flat Bar (28.50)	1/4 X 4 FL HRS ASTM A-36	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-32	Chain (28.00)	3/16 304L SS	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-33	Chain (22.50)	3/16 304L SS	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-34	Grating (25.12 WD X 99.0 LG)	1/2 X 3/16 BEARING BAR	3	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-35	Grating (25.12 WD X 78.0 LG)	1/2 X 3/16 BEARING BAR	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-36	Grating (23.88 WD X 75.0 LG)	1/2 X 3/16 BEARING BAR	3	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-37	Grating (26.88 WD X 28.5 LG)	1/2 X 3/16 BEARING BAR	6	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-38	Angle (28.50)	1/2 X 1 1/2 X 3/16 ASTM A-36	3	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-39	Angle (83.25)	1/2 X 1 1/2 X 3/16 ASTM A-36	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-40	Angle (81.25)	1/2 X 1 1/2 X 3/16 ASTM A-36	1	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
	D6251-41	Channel (6.50 X 83.25)	3/16 FL HRS ASTM A-36	3	CM	No	Does not function to contain miller offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QLCM	CGD	COMMENTS
	D6251-42	Grating Retainer Plate (3.00 X 4.00)	316 PL, HRS ASTM A-36	12	CM	No	Does not function to contain meter offgas. Platform assembly and all associated parts are external to the pressure boundary and are used for maintenance operations.
D6252 Piping Assembly 14"	D6252-1	Inlet Pipe Assembly	D6252-1	1	QL	Yes	
	D6252-2	Control Pipe Assembly	D6252-2	1	QL	Yes	
	D6252-3	Outlet Pipe Assembly	D6252-3	1	QL	Yes	
	D6252-4	Crossover Pipe Assembly	D6252-4	1	QL	Yes	
	D6252-5	Blowdown Valve W/ Operator	2004100-003 W/ 250H100-011	5	QL	Yes	
	D6252-6	Weld Neck Flange	14 X 150# 316L SS	18	QL	Yes	
	D6252-7	Weld Neck Flange	2 X 150# 316L SS	1	QL	Yes	
	D6252-8	SP Elbow LR	14 SCH 40 316L SS	5	QL	Yes	
	D6252-9	Straight Tee	14 SCH 40 316L SS	2	QL	Yes	
	D6252-10	Pipe (Cut at Assembly)	14 SCH 10 316L SS	466 in	QL	Yes	
	D6252-11	Pipe (8.19)	2 SCH 40 316L SS	1	QL	Yes	
	D6252-12	Pipe T O E (10.00)	1/2 SCH 40 316L SS	1	QL	Yes	
	D6252-13	Pipe T O E (3.19)	1/2 SCH 40 316L SS	11	QL	Yes	
	D6252-14	DELETED					
	D6252-15	Manual Valve 1/2"	2004100-019	12	QL	Yes	
	D6252-16	Thermowell	B3709-1	1	QL	Yes	
	D6252-17	Hex Hd Bolt	1-8 JNC 316 SS	120	QL	Yes	
	D6252-18	Flat Washer	316 SS	120	QL	Yes	
	D6252-19	Bellevue Assy	2004100-021	4	QL	Yes	
	D6252-20	30° Elbow SR	14 SCH 40 316L SS	1	QL	Yes	
D6255 Electrical Enclosure	D6255-1	Panel (12.00 X 62.50)	130A SHI 316L SS	1	QL	Yes	Panel is used for mounting of the POITs which have an ITS pressure boundary function. Used to mount the electrical enclosures with POITs to the carbon bed adsorber units. POITs have an ITS pressure boundary function.
	D6255-2	2 Bar 50"	76A SHI 316L SS	1	QL	Yes	
	D6255-3	Enclosure	Huffman	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6255-4	SUB-Panel	Huffman	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6255-5	Temp. Transmitter	2004100-008	9	CM	No	Additional Protection Class (APC), may be purchased as commercial component.
	D6255-6	Diff. Press. X-Mitter	2004100-016	2	QL	Yes	
	D6255-7	S Valve Manifold	Swagelok	2	QL	Yes	
	D6255-8	Routing Channel	Allen Bradley	AVR	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6255-9	End Plate	Allen Bradley	10	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6255-10	End Clamp	Allen Bradley	5	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6255-11	Marker Card	Allen Bradley	AVR	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6255-12	Terminal	Allen Bradley	106	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QLCM	CGD	COMMENTS
	D6285-13	Circuit Breaker	Allen Bradley	3	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-14	Star Block J-Box	Pepperell - Fuchs	2	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-15	Probus DP Station	2904100-043	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-16	Fiber Optic Repeater	2904100-041	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-17	Fiber Optic Housing	2904100-042	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-18	Power Supply	Phoenix	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-19	External GFCI Recept	Greco	2	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-20	Wire Duct	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-21	Dust Cover	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-22	Wire Duct	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-23	Dust Cover	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-24	Dust Cover	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-25	Wire Duct	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-26	Hex Nut	308-16JNC 316 SS	12	QL	Yes	
	D6285-27	Hex HD Bolt 1.00 LG	308-16JNC 316 SS	6	QL	Yes	
	D6285-28	Hex HD Bolt 2.00 LG	308-16JNC 316 SS	4	QL	Yes	
	D6285-29	Lock Washer	308-16JNC 316 SS	12	QL	Yes	
	D6285-30	TVSS	Ferraz Shawmut	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-31	Enclosure	Huffman	2	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6285-32	Circuit Breaker	Allen Bradley	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
D6285	D6286-1	Panel (12.00 X 62.50)	12GA SH-T 316L SS	1	QL	Yes	Panel is used for mounting of the POITs which have an ITS pressure boundary function.
Electrical Enclosure	D6286-2	2 Bar 50"	7GA SH-T 316L SS	1	QL	Yes	Used to mount the electrical enclosures with POITs to the carbon bed adsorber units. POITs have an ITS pressure boundary function.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QACM	CGID	COMMENTS
	D6286-3	Enclosure	Hoffman	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-4	Sub-Panel	Hoffman	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-5	Temp. Transmitter	2904100-068	3	CM	No	Additional Protection Gases (APG), may be purchased as commercial component.
	D6286-6	DMF Press. X-Meter	2904100-018	2	DL	Yes	
	D6286-7	S Valve Manifold	Stratco	2	DL	Yes	
	D6286-8	Mounting Channel	Allen Bradley	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-9	End Plate	Allen Bradley	10	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-10	End Clamp	Allen Bradley	5	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-11	Marker Card	Allen Bradley	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-12	Terminal	Allen Bradley	106	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-13	Circuit Breaker	Allen Bradley	3	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-14	Star Block J-Box	Panduit - Fuchs	2	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-15	Profibus DP Station	2904100-043	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-16	Fiber Optic Repeater	2904100-041	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-17	Fiber Optic Housing	2904100-042	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-18	Power Supply	Phoenix	1	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-19	External GFCI Recept.	Grace	2	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-20	Wire Duct	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-21	Duct Cover	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-22	Wire Duct	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.
	D6286-23	Duct Cover	Panduit	A/R	CM	No	Does not function to contain meter offgas. Electrical enclosure internal component used for commercial instrumentation.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D6286-24	Duct Cover	Paralut	A/R	CM	No	Does not function to contain methyl of gas. Electrical enclosure (internal) component used for commercial instrumentation.
	D6286-25	Wire Duct	Paralut	A/R	CM	No	Does not function to contain methyl of gas. Electrical enclosure (internal) component used for commercial instrumentation.
	D6286-26	Hex Nut	3B-16UNC-316 SS	12	CL	Yes	
	D6286-27	Hex HD Bolt 1.00 LG	3B-16UNC-316 SS	5	CL	Yes	
	D6286-28	Hex HD Bolt 2.00 LG	3B-16UNC-316 SS	4	CL	Yes	
	D6286-29	COA Washer	3B-16UNC-316 SS	12	CL	Yes	
	D6286-30	WSS	Paralut Showernut	1	CM	No	Does not function to contain methyl of gas. Electrical enclosure (internal) component used for commercial instrumentation.
	D6286-31	Enclosure	Hoffman	2	CM	No	Does not function to contain methyl of gas. Electrical enclosure (internal) component used for commercial instrumentation.
	D6304-32	Circuit Breaker	Allen Bradley	1	CM	No	Does not function to contain methyl of gas. Electrical enclosure (internal) component used for commercial instrumentation.
D6287 Piping Assembly 2"	D6304-33	2" W (304L) Assembly	2 SCH 40 316L SS	20ft	CL	Yes	
	D6304-34	2" Elbow	2 SCH 40 316L SS	7	CL	Yes	
	D6304-35	2" Tee	2 SCH 40 316L SS	9	CL	Yes	
	D6304-36	2" Cap	2 SCH 40 316L SS	1	CL	Yes	
	D6304-37	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-38	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-39	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-40	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-41	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-42	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-43	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-44	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-45	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-46	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-47	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-48	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-49	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
	D6304-50	2" Flange	2 SCH 40 316L SS	1	CL	Yes	
D6304 Final Assembly	D6304-1	Base Frame Assembly (1A/B)	D6218	1	CL	Yes	
	D6304-2	Rolling Assembly (1A)	D6222	1	CL	Yes	
	D6304-3	Rolling Assembly (1A)	D6222	1	CL	Yes	
	D6304-4	Rolling Assembly (1B)	D6223	1	CL	Yes	
	D6304-5	Rolling Assembly (1B)	D6223	1	CL	Yes	
	D6304-6	Platform Assembly (1A/B)	D6250	1	CL	Yes	
	D6304-7	Platform Assembly (2A/B)	D6251	1	CL	Yes	
	D6304-8	Ladder Assembly (1A/B)	D6220	1	CM	No	Does not function to contain methyl of gas. Ladder and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D6304-10	Ladder Assembly (2A/B)	D6220	1	CM	No	Does not function to contain methyl of gas. Ladder and all associated parts are external to the pressure boundary and form part of the maintenance platform.
	D6304-11	Crane Trolley Assembly (1A/B)	D6226	1	CM	No	Does not function to contain methyl of gas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6304-12	Crane Trolley Assembly (2A/B)	D6226	1	CM	No	Does not function to contain methyl of gas. Crane trolley and all associated parts are external to the pressure boundary and are used as part of the carbon media loading operation.
	D6304-13	Inlet Pipe Assembly (1A/B)	D6282-1	1	CL	Yes	
	D6304-14	Crossover Pipe Assembly (1A/B)	D6282-2	1	CL	Yes	
	D6304-15	Outlet Pipe Assembly (1A/B)	D6282-3	1	CL	Yes	
	D6304-16	Crossover Pipe Assembly (1A/B)	D6282-4	1	CL	Yes	
	D6304-17	Inlet Pipe Assembly (2A/B)	D6282-1	1	CL	Yes	
	D6304-18	Crossover Pipe Assembly (2A/B)	D6282-2	1	CL	Yes	
	D6304-19	Outlet Pipe Assembly (2A/B)	D6282-3	1	CL	Yes	
	D6304-20	Crossover Pipe Assembly (2A/B)	D6282-4	1	CL	Yes	

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	U/L/C/M	CGD	COMMENTS
	D8304-21	Ripe Assembly 2' (2AR)	D8307	1	OL	Yes	
	D8304-22	Ripe Assembly 2' (2AR)	D8307	1	OL	Yes	
	D8304-23	Support (1/4 THK 4.0 X 4.0)	Alumina Silicate Ceramic	100	OL	Yes	
	D8304-24	Gasket 2'		10	OL	Yes	
	D8304-25	Straddle 1"		20	OL	Yes	
	D8304-26	Hex HD Bolt (1.50)	12-13UNC 316 SS	75	OL	Yes	
	D8304-27	Hex HD Bolt (2.00)	12-13UNC 316 SS	210	OL	Yes	
	D8304-28	Hex Nut	12-13UNC 316 SS	216	OL	Yes	
	D8304-29	Lock Washer	12-11 316 SS	216	OL	Yes	
	D8304-30	Hex HD Bolt (2.60)	308-11UNC 316 SS	15	OL	Yes	
	D8304-31	Hex HD Bolt (3.00)	308-11UNC 316 SS	24	OL	Yes	
	D8304-32	Hex Nut	308-11UNC 316 SS	144	OL	Yes	
	D8304-33	Hex HD Bolt (4.50)	1-3UNC 316 SS	144	OL	Yes	
	D8304-34	Hex HD Bolt (2.50)	1-3UNC 316 SS	144	OL	Yes	
	D8304-35	Hex Nut	Calcium-Silicate	2400 IP	CM	No	Does not function to contain melter offgas. Insulation is not provided by ICNEX.
	D8304-36	Insulation	Calcium-Silicate	2400 IP	CM	No	Does not function to contain melter offgas. Insulation bonding material is not provided by ICNEX.
	D8304-37	High Temperature Adhesive	Calboard R Gnd	AR	CM	No	Does not function to contain melter offgas. RTV is recommended for sealing the joints of the outgoing and is not provided by ICNEX.
	D8304-38	Sealing Caulk	PERMATEX HI-TEMP RED RTV	AR	CM	No	Does not function to contain melter offgas. RTV is recommended for sealing the joints of the outgoing and is not provided by ICNEX.
	D8304-39	Flat Washer	1/2 ID X 1.25 OD 316 SS	832	OL	Yes	
	D8304-40	Flange Flare (5/8" O.D. THRU 08)	88221	1	CM	No	Does not function to contain melter offgas. Nameplate is external to the pressure boundary and is only used to identify the equipment.
	D8304-41	3-Way Solenoid Valve	Valvot	12	OL	No	Valvot solenoid valves have been procured from a qualified supplier. No CGD necessary.
	D8304-42	3-Way Solenoid Valve	ASCO	12	CM	No	Does not function to contain melter offgas. This 3-way solenoid valve is used during normal operation to activate the 14 inch butterfly valves to either isolate the units for maintenance or adjust the flow of offgas.
D8317	D8317-1	Beam	6 X 12.5# FR3 ASTM A-36	2	CM	No	Does not function to contain melter offgas. External to the pressure boundary and is considered a non-permissible piece of plant equipment. Used only for handling the equipment during transportation and installation.
Speaker IN1	D8317-2	Plate	10 PLATE ASTM A36	4	CM	No	Does not function to contain melter offgas. External to the pressure boundary and is considered a non-permissible piece of plant equipment. Used only for handling the equipment during transportation and installation.
	D8317-3	Plate	10 PLATE ASTM A36	4	CM	No	Does not function to contain melter offgas. External to the pressure boundary and is considered a non-permissible piece of plant equipment. Used only for handling the equipment during transportation and installation.
	D8317-4	Anchor Shank (25000#)	McMaster-Carr	12	CM	No	Does not function to contain melter offgas. External to the pressure boundary and is considered a non-permissible piece of plant equipment. Used only for handling the equipment during transportation and installation.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS	
DB179 Adsorber Assembly	DB171-7	Banding Washer	12GA SHT 316L SS	6	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB171-8	Perforated Sheet (22.38)	20GA SHT 316L SS	20	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB171-9	Perforated Sheet (10.44)	20GA SHT 316L SS	4	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB171-10	Vertical Channel With Holes	12GA SHT 316L SS	2	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB179-1	Inlet Air Slot with Sample Holes	DB169-1	1	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB179-2	Inlet Air Slot without Sample Holes	DB169-2	1	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB179-3	Outlet Air Slot	DB170	1	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB179-4	Bed Air Slot with Sample Holes	DB171-1	1	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB179-5	Bed Air Slot without Sample Holes	DB171-2	1	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen.	
	DB179-6	Tubing	1 1/2 OD x 0.125 WT, 316L SS	3	CM	No	Does not function to contain media offgas. This part forms part of the carbon media screen, used to fill the hole spaced used for the grain fresh sample.	
	DB179-7	Pipe Coupling	1 1/4 x 3.0006 316L SS	3	QL	Yes		
	DB179-8	Inlet Plate	12GA SHT 316L SS	1	CM	No	Does not function to contain media offgas. Plate is used to channel air into the air slots and through the carbon media.	
	DB179-9	Outlet Plate	12GA SHT 316L SS	2	CM	No	Does not function to contain media offgas. Plate is used to channel air into the air slots and through the carbon media.	
	DB179-10	Divider Plate	12GA SHT 316L SS	2	CM	No	Does not function to contain media offgas. Plate is used in the top plenum of the carbon media beds to separate the different medias and aid in carbon media loading.	
	DB179-11	Cover Plate	12GA SHT 316L SS	2	CM	No	Does not function to contain media offgas. Plate is used to channel air into the air slots and through the carbon media.	
	DB183-1	Adsorber Assembly	DB179	1	QL	Yes *	The pps coupling called out as part of this assembly functions to contain media offgas, therefore, the whole assembly is designated ITS. * For Item DB183-1 should refer to drawing DB179 for the safety / quality designation and CGD requirements.	
	DB183 Housing Weldment	DB183-2	Blank Panel	DB185-1	1	QL	Yes	
		DB183-3	Front Panel	DB185-2	1	QL	Yes	
		DB183-4	Bottom Panel	DB185-4	1	QL	Yes	
DB183-5		Top Panel	DB185-5	1	QL	Yes		
DB183-6		Top Panel With Holes	DB185-6	1	QL	Yes		
DB183-7		Top Panel	DB185-7	1	QL	Yes		
DB183-8		Top End Panel	DB185-8	2	QL	Yes		
DB183-9		Inlet End Panel	DB185-9	1	QL	Yes		
DB183-10		Outlet End Panel	DB185-10	1	QL	Yes		
DB183-11		Hopper Size Main Bed	DB185-11	9	QL	Yes		
DB183-12		Hopper Size Guard Bed Panel	DB185-12	8	QL	Yes		
DB183-13		Hopper End Main Bed Panel	DB185-13	8	QL	Yes		
DB183-14		Hopper End Guard Bed Panel	DB185-14	8	QL	Yes		
DB183-15		Hopper Bottom Panel	DB185-15	8	QL	Yes		
DB183-16		Manway Flange	DB185-16	2	QL	Yes		
DB183-17		Reinforcement Plate 16"	DB185-17	2	QL	Yes		
DB183-18		Reinforcement Plate 14"	DB185-18	4	QL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Table 2 Quality Level List (LAW)

QUALITY LEVEL

COMPONENT TAG NO.
24590-LAW-MV-LVP-ADBR-00001A/B

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CS/D	COMMENTS
B8597 Carbon Sample Plug	B8597-1	Rice Plug Hex Threaded	1 1/4 x 1.50 316L SS	1	OL	Yes	Does not function to contain melter offgas. Forms part of the Carbon Sample Plug Assembly. Used to plug hole in the adsorber perforated sheet needed to take carbon samples.
	B8597-2	Tubing	1.0 OD x .120 WT 316L SS ASTM A-289	1	CM	No	
	B8597-3	Round Bar 1.00 LG	1 1/4 DIA BAR 316L SS ASTM A-276 or ASTM A-479	1	CM	No	
B8598 Thermowell Assy	B8598-1	Piping Coupling Threaded	1/2 x 3.000# 316L SS	1	OL	Yes	Does not function to contain melter offgas. Forms part of the Carbon Sample Plug Assembly. Used to plug hole in the adsorber perforated sheet needed to take carbon samples.
	B8598-2	Tubing LG as Req'd	.50 OD x .120 WT 316L SS ASTM A-289	1	OL	Yes	
	B8598-3	Plug (See Detail)	1/4 DIA RD BAR 316L SS ASTM A-276 or ASTM A-479	1	OL	Yes	
	D8224-1	Plate - 1	3/16 PL 316L SS ASTM A-240	1	OL	Yes	
	D8224-2	Plate - 2	3/16 PL 316L SS ASTM A-240	2	OL	Yes	
	D8224-3	Plate - 3	3/16 PL 316L SS ASTM A-240	2	OL	Yes	
	D8224-4	Flat Bar - 1	3/4 x 2 RECT BAR 316L SS ASTM A-276 or A-479	2	OL	Yes	
	D8224-5	Flat Bar - 2	3/4 x 2 RECT BAR 316L SS ASTM A-276 or A-479	2	OL	Yes	
	D8224-6	Flat Bar - 3	1/4 x 2 RECT BAR 316L SS ASTM A-276 or A-479	1	CM	No	
	D8473-1	Vertical Channel 9.64 x 89.29	12 GA SHT 316L SS	1	CM	No	
D8473 End Air Slot	D8473-2	Horizontal Channel 8.89 x 75.00	12 GA SHT 316L SS	7	CM	No	Does not function to contain melter offgas. This part is used to make a lifting lug for the access door. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen.
	D8473-3	Lower Channel 9.64 x 77.00	12 GA SHT 316L SS	1	CM	No	
	D8473-4	Upper Channel 15.14 x 77.00	12 GA SHT 316L SS	1	CM	No	
	D8473-5	Vertical Flat Bar 1.00 x 82.00	12 GA SHT 316L SS	1	CM	No	
	D8473-6	Vertical Flat Bar 1.00 x 87.50	12 GA SHT 316L SS	1	CM	No	
	D8473-7	Perforated Sheet 22.38 x 76.75	C8476	3	CM	No	
	D8473-8	Perforated Sheet 18.27 x 76.75	A9399	1	CM	No	
	D8474-1	Vertical Channel 5.82 x 89.29	12 GA SHT 316L SS	1	CM	No	
	D8474-2	Horizontal Channel 4.779 x 75.00	12 GA SHT 316L SS	7	CM	No	
	D8474-3	Lower Channel 5.52 x 77.00	12 GA SHT 316L SS	1	CM	No	
D8474 Center Air Slot	D8474-4	Upper Channel 16.52 x 77.00	12 GA SHT 316L SS	1	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen. Does not function to contain melter offgas. This part forms part of the carbon media screen.
	D8474-5	Vertical Flat Bar 1.00 x 82.00	12 GA SHT 316L SS	2	CM	No	
	D8474-6	Perforated Sheet 22.38 x 76.75	C8476	6	CM	No	
	D8474-7	Perforated Sheet 18.27 x 76.75	A9399	2	CM	No	

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
D8475	D8475-1	Horizontal Channel 8.89 x 75.00	12 GA.SHT 316L S.S.	7	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
End Air Slot	D8475-2	Lower Channel 8.64 x 77.00	12 GA.SHT 316L S.S.	1	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8475-3	Upper Channel 15.14 x 77.00	12 GA.SHT 316L S.S.	1	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8475-4	Vertical Flat Bar 1.00 x 82.00	12 GA.SHT 316L S.S.	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8475-5	Vertical Flat Bar 1.00 x 87.50	12 GA.SHT 316L S.S.	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8475-6	Perforated Sheet 22.38 x 76.75	C8476	3	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8475-7	Perforated Sheet 18.27 x 76.75	A9389	1	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-1	End Air Slot	D8473	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-2	Center Air Slot	D8474	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-3	End Air Slot	D8475	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-4	Backing Washer 3.50 OD x 2.25 ID	12 GA.SHT 316L S.S.	3	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
Adsorber Assy	D8524-5	Tubing 8.19 LG	1 1/2 OD x .120 WT 316L SS ASTM A-269	3	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-6	Pipe Coupling Threaded	1 1/4 x 3000# 316L SS	3	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-7	Closure Plate 31.55 x 84.00	12 GA.SHT 316L SS	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-8	Closure Plate 39.55 x 84.00	12 GA.SHT 316L SS	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8524-9	Cover Plate 3.50 x 84.00	12 GA.SHT 316L SS	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-1	End Air Slot	D8473	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-2	Center Air Slot	D8474	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-3	End Air Slot	D8475	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-4	Backing Washer 3.50 OD x 2.25 ID	12 GA.SHT 316L SS	3	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-5	Tubing 8.19 LG	1 1/2 OD x .120 WT 316L SS ASTM A-269	3	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
Adsorber Assy	D8525-6	Pipe Coupling Threaded	1 1/4 x 3000# 316L SS	3	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-7	Closure Plate 31.55 x 84.00	12 GA.SHT 316L SS	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-8	Closure Plate 39.55 x 84.00	12 GA.SHT 316L SS	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8525-9	Cover Plate 3.50 x 84.00	12 GA.SHT 316L SS	2	CM	No	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8526-1	Adsorber Assy LAW Unit B	D8524	1	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8526-2	Front Panel Assy LAW Unit B	D8529	1	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8526-3	Back Panel Assy LAW Unit B	D8530	1	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8526-4	Top Panel Assy LAW Unit B	D8531	1	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8526-5	Bottom Panel Assy LAW Unit A/B	D8532	1	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8526-6	Outlet End Panel Assy LAW Unit B	D8533	1	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
Housing Widmt	D8526-7	Inlet End Panel Assy LAW Unit A/B	D8534	1	QL	Yes	Does not function to contain melter offgas. This part forms part of the carbon media screen
	D8526-8						
	D8526-9						

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
D8527 Housing Weldmt	D8526-10	Thermowell Assy 69"	B8568-1	2	OL	Yes	
	D8526-11	Thermowell Assy 27"	B8568-2	2	OL	Yes	
	D8526-12	Filter Rack Assy	D8581	1	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8526-13	Lifting Lug	B8216	4	CM	No	Does not function to contain melter offgas. Lifting lugs do not form part of the pressure boundary and are only used to handle the housings for transportation and installation.
	D8526-14	Bracket .82 x 3.00	12 GA SHT 316L SS ASTM A-240	NR	CM	No	Does not function to contain melter offgas. Used to help support the carbon media thermowells.
	D8526-15	Pipe 10.75 LG TOE	1/2 SCH 40 316L SS ASTM A-312	5	OL	Yes	
	D8526-16	Pipe 10.50 LG TOE	2 SCH 40 316L SS ASTM A-312	2	OL	Yes	
	D8526-17						
	D8526-18	Pipe 20.81 LG	2 SCH 40 316L SS ASTM A-312	1	OL	Yes	
	D8526-19						
	D8526-20	90 DEG Elbow LR BW	2 SCH 40 316L SS ASTM A-403	1	OL	Yes	
	D8526-21	Slip-On Flange	1-1/2 x 150# 316L SS ASTM A-182	2	OL	Yes	
	D8526-22	Weld Neck Flange	2 x 150# 316L SS ASTM-182	1	OL	Yes	
	D8526-23	Pipe 24.81 LG	3 SCH 40 316L SS ASTM A-312	1	OL	Yes	
	D8526-24						
	D8526-25	Weld Neck Flange	3 x 150# 316L SS ASTM A-182	1	OL	Yes	
	D8526-26	Washer 3.9 OD x 1.9 ID	1/2 PL 316L SS ASTM A-240	2	OL	Yes	
	D8526-27	Pipe 10.70 LG TOE	1-1/2 SCH 40 316L SS ASTM A-312	2	OL	Yes	
	D8527-1	Adsorber Assy LAW Unit A	D8624	1	OL	Yes	
	D8527-2	Front Panel Assy LAW Unit A	D8629	1	OL	Yes	
	D8527-3	Back Panel Assy LAW Unit A	D8630	1	OL	Yes	
	D8527-4	Top Panel Assy LAW Unit A	D8631	1	OL	Yes	
	D8527-5	Bottom Panel Assy LAW Unit A/B	D8632	1	OL	Yes	
	D8527-6	Outlet End Panel Assy LAW Unit A	D8633	1	OL	Yes	
	D8527-7	Inlet End Panel Assy LAW Unit A/B	D8634	1	OL	Yes	
	D8527-8						
	D8527-9						
D8527-10	Thermowell Assy 69"	B8568-1	2	OL	Yes		
D8527-11	Thermowell Assy 27"	B8568-2	2	OL	Yes		
D8527-12	Filter Rack Assy	D8581	1	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.	
D8527-13	Lifting Lug	B8216	4	CM	No	Does not function to contain melter offgas. Lifting lugs do not form part of the pressure boundary and are only used to handle the housings for transportation and installation.	
D8527-14	Bracket .82 x 3.00	12 GA SHT 316L SS ASTM A-240	NR	CM	No	Does not function to contain melter offgas. Used to help support the carbon media thermowells.	
D8527-15	Pipe 10.75 LG TOE	1/2 SCH 40 316L SS ASTM A-312	5	OL	Yes		
D8527-16	Pipe 10.50 LG TOE	2 SCH 40 316L SS ASTM A-312	2	OL	Yes		
D8527-17							
D8527-18	Pipe 20.81 LG	2 SCH 40 316L SS ASTM A-312	1	OL	Yes		
D8527-19							
D8527-20	90 DEG Elbow LR BW	2 SCH 40 316L SS ASTM A-403	1	OL	Yes		
D8527-21	Slip-On Flange	1-1/2 x 150# 316L SS ASTM A-182	2	OL	Yes		
D8527-22	Weld Neck Flange	2 x 150# 316L SS ASTM-182	1	OL	Yes		
D8527-23	Pipe 24.81 LG	3 SCH 40 316L SS ASTM A-312	1	OL	Yes		
D8527-24							
D8527-25	Weld Neck Flange	3 x 150# 316L SS ASTM A-182	1	OL	Yes		
D8527-26	Washer 3.9 OD x 1.9 ID	1/2 PL 316L SS ASTM A-240	2	OL	Yes		
D8527-27	Pipe 10.75 LG TOE	1-1/2 SCH 40 316L SS ASTM A-312	2	OL	Yes		
D8528-1	Plate 35.5 x 90.75	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8529-2	Plate 98.00 x 117.75	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8529-3	Plate 5.00 x 111.50	1/4 PL 316L SS ASTM A-240	2	OL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS	
D8530 Back Panel Assy	D8529-4	Plate 5.00 x 90.00	1/4 PL 316L SS ASTM A-240	8	QL	Yes		
	D8529-5	Plate 5.00 x 40.62	1/4 PL 316L SS ASTM A-240	2	QL	Yes		
	D8529-6	Plate 5.00 x 33.50	1/4 PL 316L SS ASTM A-240	2	QL	Yes		
	D8529-7	S-Beam 120.50 LG	S8 x 18.4# CS ASTM A-36	2	QL	Yes		
	D8529-8	S-Beam 97.75 LG	S8 x 18.4# CS ASTM A-36	8	QL	Yes		
	D8529-9	S-Beam 32.81 LG	S8 x 18.4# CS ASTM A-36	1	QL	Yes		
	D8529-10	S-Beam 24.25 LG	S8 x 18.4# CS ASTM A-36	2	QL	Yes		
	D8529-11	Pipe 10.12 LG	16 SCH 10 316L SS ASTM A-312	2	QL	Yes		
	D8529-12	Re-Bar 18"	D8538-17 (A9357)	4	QL	Yes		
	D8529-13	Gusset	D8538-5 (A9359)	4	QL	Yes		
	D8529-14	Gusset	D8538-7 (A9359)	1	QL	Yes		
	D8529-15	Gusset	D8538-9 (A9360)	1	QL	Yes		
	D8529-16	Pad w/ Holes	D8538-3 (A9361)	3	QL	Yes		
	D8529-17	Pad	D8538-4 (A9362)	5	QL	Yes		
	D8529-18	Weld Neck Flange	18 x 150# 316L SS ASTM A-182	4	QL	Yes		
	D8529-19	Plate 48.0 x 90.75	1/2 PL 316L SS ASTM A-240	2	QL	Yes		
	D8529-20	Pad w/ Holes	D8538-1 (A9384)	5	QL	Yes		
	D8529-21	Pad	D8538-2 (A9383)	4	QL	Yes		
	D8529-22	Plate 5.00 x 4.81	1/4 PL 316L SS ASTM A-240	1	QL	Yes		
	D8530-1	Plate 80.75 x 228.60	1/4 PL 316L SS ASTM A-240	1	QL	Yes		
	D8530-2	Plate 27.00 x 48.75	1/4 PL 316L SS ASTM A-240	2	QL	Yes		
	D8530-3	Plate 5.00 x 111.50	1/4 PL 316L SS ASTM A-240	2	QL	Yes		
D8530-4	Plate 5.00 x 90.00	1/4 PL 316L SS ASTM A-240	8	QL	Yes			
D8530-5	Plate 5.00 x 90.31	1/4 PL 316L SS ASTM A-240	1	QL	Yes			
D8530-6	Plate 5.00 x 63.31	1/4 PL 316L SS ASTM A-240	1	QL	Yes			
D8530-7	Plate 5.00 x 1.31	1/4 PL 316L SS ASTM A-240	2	QL	Yes			
D8530-8	Plate 5.00 x 8.50	1/4 PL 316L SS ASTM A-240	4	QL	Yes			
D8530-9	S-Beam 120.50 LG	S8 x 18.4# CS ASTM A-36	2	QL	Yes			
D8530-10	S-Beam 97.75 LG	S8 x 18.4# CS ASTM A-36	8	QL	Yes			
D8530-11	S-Beam 99.50 LG	S8 x 18.4# CS ASTM A-36	1	QL	Yes			
D8530-12	S-Beam 72.50 LG	S8 x 18.4# CS ASTM A-36	1	QL	Yes			
D8530-13	S-Beam 4.50 LG	S8 x 18.4# CS ASTM A-36	2	QL	Yes			
D8530-14	Cylinder 16" ID	D8538-15 (A9381)	2	QL	Yes			
D8530-15	Re-Bar 16"	D8538-16 (A9382)	2	QL	Yes			
D8530-16	Pad w/ Holes	D8538-3 (A9382)	3	QL	Yes			
D8530-17	Pad	D8538-4 (A9381)	2	QL	Yes			
D8530-18	Flange	D8538-13 (A9385)	5	QL	Yes			
D8530-19	Pad w/ Holes	D8538-1 (A9384)	2	QL	Yes			
D8530-20	Pad	D8538-2 (A9383)	5	QL	Yes			
D8531	Top Panel Assy							
D8531 Top Panel Assy	D8531-1	Plate 80.00 x 154.00	1/2 PL 316L SS ASTM A-240	1	QL	Yes		
	D8531-2	Plate 48.75 x 80.00	1/2 PL 316L SS ASTM A-240	1	QL	Yes		
	D8531-3	Plate 24.75 x 80.00	1/2 PL 316L SS ASTM A-240	1	QL	Yes		
	D8531-4	Plate 6.75 x 80.00	1/2 PL 316L SS ASTM A-240	2	QL	Yes		
	D8531-5	Plate 5.00 x 78.50	1/4 PL 316L SS ASTM A-240	10	QL	Yes		
	D8531-6	Plate 5.00 x 20.88	1/4 PL 316L SS ASTM A-240	2	QL	Yes		
	D8531-7	Plate 5.00 x 15.75	1/4 PL 316L SS ASTM A-240	4	QL	Yes		
	D8531-8	Plate 5.00 x 8.50	1/4 PL 316L SS ASTM A-240	8	QL	Yes		
	D8531-9	S-Beam 81.50 LG	S8 x 18.4# CS ASTM A-36	9	QL	Yes		
	D8531-10	S-Beam 60.75 LG	S8 x 18.4# CS ASTM A-36	1	QL	Yes		
	D8531-11	S-Beam 20.88 LG	S8 x 18.4# CS ASTM A-36	2	QL	Yes		
	D8531-12	S-Beam 15.75 LG	S8 x 18.4# CS ASTM A-36	4	QL	Yes		
	D8531-13	Pipe 12.50 LG	8 SCH 10 316L SS ASTM A-312	10	QL	Yes		
	D8531-14	Re-Bar 8"	D8538-18 (A9820)	10	QL	Yes		
	D8531-15	Slip-On Flange	8 x 150# 316L SS ASTM A-182	10	QL	Yes		
	D8532	Bottom Panel Assy						
	D8532 Bottom Panel Assy	D8532-1	Plate 25.25 x 82.50	1/2 PL 316L SS ASTM A-240	1	QL	Yes	
		D8532-2	Plate 9.25 x 154.00	1/2 PL 316L SS ASTM A-240	4	QL	Yes	
D8532-3		Plate 3.89 x 154.00	1/2 PL 316L SS ASTM A-240	2	QL	Yes		
D8532-4		Plate 5.00 x 82.50	1/2 PL 316L SS ASTM A-240	1	QL	Yes		
D8532-5		Plate 21.19 x 60.82	1/2 PL 316L SS ASTM A-240	12	QL	Yes		
D8532-6		Plate 27.65 x 30.06	1/2 PL 316L SS ASTM A-240	12	QL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
D8533 Outlet End Panel Assy	D8532-7	Plate 9.50 x 9.50	1/2 PL 316L SS ASTM A-240	6	OL	Yes	
	D8532-8	Plate 27.00 x 82.50	1/2 PL 316L SS ASTM A-240	1	OL	Yes	
	D8532-9	Plate 5.00 x 82.50	1/4 PL 316L SS ASTM A-240	3	OL	Yes	
	D8532-10	S-Beam 97.50 LG	S8 x 18.4# CS ASTM A-36	2	OL	Yes	
	D8532-11	S-Beam 82.50 LG	S8 x 18.4# CS ASTM A-36	1	OL	Yes	
	D8532-12	Slide Gate Assy	D8532-12	6	OL	Yes	
	D8533-1	Plate 80.00 x 111.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes	
	D8533-2	Plate 5.00 x 109.50	1/4 PL 316L SS ASTM A-240	4	OL	Yes	
	D8533-3	S-Beam 111.00 LG	S8 x 18.4# CS ASTM A-36	4	OL	Yes	
	D8533-4	Bag-Out Flange	D8533-10	6	OL	Yes	
	D8533-5	Door Flange	D8533-11	6	OL	Yes	
	D8533-6	Re-Bar Flange	D8533-12	6	OL	Yes	
D8533-7	Round Bar cut to length at assy	1/4 DIA RD BAR 316L SS ASTM A-276 or ASTM A-470	12	OL	Yes		
D8533-8	Hex HD Bolt 1.75 LG	1/2-13 UNC 316 SS ASTM A-193	36	OL	Yes		
D8533-9	Pad w/ Holes	D8538-1 (A9384)	2	OL	Yes		
D8533-10	Pad	D8538-2 (A9385)	6	OL	Yes		
D8534-1	Plate 80.00 x 84.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8534-2	Plate 5.00 x 82.50	1/4 PL 316L SS ASTM A-240	4	OL	Yes		
D8534-3	S-Beam 84.00 LG	S8 x 18.4# CS ASTM A-36	4	OL	Yes		
D8534-4	Pad w/ Holes	D8538-1 (A9384)	2	OL	Yes		
D8534-5	Pad	D8538-2 (A9385)	6	OL	Yes		
D8535-1	Plate 98.00 x 117.75	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8535-2	Plate 48.00 x 90.75	1/2 PL 316L SS ASTM A-240	2	OL	Yes		
D8535-3	Plate 5.00 x 111.50	1/4 PL 316L SS ASTM A-240	2	OL	Yes		
D8535-4	Plate 5.00 x 90.00	1/4 PL 316L SS ASTM A-240	8	OL	Yes		
D8535-5	Plate 5.00 x 60.50	1/4 PL 316L SS ASTM A-240	1	OL	Yes		
D8535-6	Plate 5.00 x 33.50	1/4 PL 316L SS ASTM A-240	1	OL	Yes		
D8535-7	Plate 5.00 x 11.62	1/4 PL 316L SS ASTM A-240	2	OL	Yes		
D8535-8	S-Beam 120.50 LG	S8 x 18.4# CS ASTM A-36	2	OL	Yes		
D8535-9	S-Beam 97.75 LG	S8 x 18.4# CS ASTM A-36	3	OL	Yes		
D8535-10	S-Beam 61.88 LG	S8 x 18.4# CS ASTM A-36	1	OL	Yes		
D8535-11	S-Beam 26.12 LG	S8 x 18.4# CS ASTM A-36	1	OL	Yes		
D8535-12	Pipe 10-12 LG	18 SCH 10 316L SS ASTM A-312	1	OL	Yes		
D8535-13	Re-Bar 18"	D8538-17 (A9357)	4	OL	Yes		
D8535-14	Gusset	D8538-8 (A9376)	2	OL	Yes		
D8535-15	Gusset	D8538-5 (A9358)	1	OL	Yes		
D8535-16	Gusset	D8538-6 (A9377)	1	OL	Yes		
D8535-17	Pad w/ Holes	D8538-3 (A9362)	3	OL	Yes		
D8535-18	Pad	D8538-4 (A9381)	5	OL	Yes		
D8535-19	Weld Neck Flange	15 x 150# 316L SS ASTM A-182	4	OL	Yes		
D8535-20	Plate 36.50 x 90.75	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8535-21	Pad w/ Holes	D8538-1 (A9384)	5	OL	Yes		
D8535-22	Pad	D8538-2 (A9385)	4	OL	Yes		
D8535-23	Plate 5.00 x 7.45	1/4 PL 316L SS ASTM A-240	1	OL	Yes		
D8536-1	Plate 98.00 x 117.75	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8536-2	Plate 48.00 x 90.75	1/2 PL 316L SS ASTM A-240	2	OL	Yes		
D8536-3	Plate 5.00 x 111.50	1/4 PL 316L SS ASTM A-240	2	OL	Yes		
D8536-4	Plate 5.00 x 90.31	1/4 PL 316L SS ASTM A-240	8	OL	Yes		
D8536-5	Plate 5.00 x 90.00	1/4 PL 316L SS ASTM A-240	1	OL	Yes		
D8536-6	Plate 5.00 x 63.31	1/4 PL 316L SS ASTM A-240	1	OL	Yes		
D8536-7	Plate 5.00 x 1.31	1/4 PL 316L SS ASTM A-240	2	OL	Yes		
D8536-8	Plate 5.00 x 8.50	1/4 PL 316L SS ASTM A-240	4	OL	Yes		
D8536-9	S-Beam 120.50 LG	S8 x 18.4# CS ASTM A-36	2	OL	Yes		
D8536-10	S-Beam 97.75 LG	S8 x 18.4# CS ASTM A-36	5	OL	Yes		
D8536-11	S-Beam 61.88 LG	S8 x 18.4# CS ASTM A-36	1	OL	Yes		
D8536-12	S-Beam 26.12 LG	S8 x 18.4# CS ASTM A-36	1	OL	Yes		
D8536-13	S-Beam 4.50 LG	S8 x 18.4# CS ASTM A-36	2	OL	Yes		
D8536-14	Cylinder 16" ID	D8538-15 (A9381)	2	OL	Yes		
D8536-15	Re-Bar 16"	D8538-16 (A9382)	2	OL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
D8537 Top Panel Assy	D8538-16	Pad w/ Holes	D8538-3 (A9362)	3	OL	Yes	
	D8538-17	Pad	D8538-4 (A9361)	5	OL	Yes	
	D8538-18	Flange	D8538-13 (A9385)	2	OL	Yes	
	D8538-19	Plate 48.00 x 90.75	1/2 PL 316L SS ASTM A-240	1	OL	Yes	
	D8538-20	Plate 36.50 x 90.75	1/2 PL 316L SS ASTM A-240	1	OL	Yes	
	D8538-21	Pad w/ Holes	D8538-1 (A9384)	5	OL	Yes	
	D8538-22	Pad	D8538-2 (A9383)	4	OL	Yes	
	D8537-1	Plate 60.00 x 184.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes	
	D8537-2	Plate 48.75 x 80.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes	
	D8537-3	Plate 24.75 x 80.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes	
	D8537-4	Plate 6.75 x 80.00	1/2 PL 316L SS ASTM A-240	2	OL	Yes	
	D8537-5	Plate 5.00 x 78.50	1/4 PL 316L SS ASTM A-240	10	OL	Yes	
	D8537-6	Plate 5.00 x 20.88	1/4 PL 316L SS ASTM A-240	2	OL	Yes	
	D8537-7	Plate 5.00 x 15.75	1/4 PL 316L SS ASTM A-240	4	OL	Yes	
	D8537-8	Plate 5.00 x 8.25	1/4 PL 316L SS ASTM A-240	8	OL	Yes	
	D8537-9	S-Beam 81.50 LG	SS x 18.4# CS ASTM A-36	9	OL	Yes	
	D8537-10	S-Beam 80.75 LG	SS x 18.4# CS ASTM A-36	1	OL	Yes	
	D8537-11	S-Beam 20.88 LG	SS x 18.4# CS ASTM A-36	2	OL	Yes	
	D8537-12	S-Beam 15.75 LG	SS x 18.4# CS ASTM A-36	4	OL	Yes	
	D8537-13	Pipe 12.50 LG	8 SCH 10 316L SS ASTM A-312	10	OL	Yes	
	D8537-14	Re-Bar 8"	D8538-18 (A9620)	10	OL	Yes	
	D8537-15	Slip-On Flange	8 x 150# 316L SS ASTM A-182	10	OL	Yes	
D8538-1	Pad w/ Holes 5.00 x 7.50	1/2 PL HRS AST A-36	28	OL	Yes		
D8538-2	Pad w/ Holes 5.00 x 7.50	1/2 PL HRS AST A-36	40	OL	Yes		
D8538-3	Pad w/ Holes 5.00 x 8.00	1/2 PL HRS AST A-36	12	OL	Yes		
D8538-4	Pad w/ Holes 6.00 x 8.00	1/2 PL HRS AST A-36	20	OL	Yes		
D8538-5	Gusset 7.53 x 7.82	1/2 PL 316L SS ASTM A-240	5	OL	Yes		
D8538-6	Gusset 8.00 x 10.83	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8538-7	Gusset 4.94 x 6.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8538-8	Gusset 3.19 x 10.86	1/2 PL 316L SS ASTM A-240	2	OL	Yes		
D8538-9	Gusset 7.89 x 8.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8538-10	Beg-Cut Flange 12.75 x 57.65	3/16 PL 316L SS ASTM A-240	6	OL	Yes		
D8538-11	Door Flange 74.00 LG	3/4 x 3 RECT BAR 316L SS ASTM A-276 or A-479	6	OL	Yes		
D8538-12	Re-Bar Flange 74.00 LG	1.25 x 3 RECT BAR 316L SS ASTM A-276 or A-479	6	OL	Yes		
D8538-13	Manway Flange 21.50 OD x 116.50 ID	3/4 PL 316L SS ASTM A-240	4	OL	Yes		
D8538-14	Manway Cover 21.50 DIA	1/2 PL 316L SS ASTM A-240	4	OL	Yes		
D8538-15	Cylinder 16" ID, 14.00 x 50.85	3/16 PL 316L SS ASTM A-240	4	OL	Yes		
D8538-16	Re-Bar 16" 72.00 LG	1 x 2 RECT BAR 316L SS ASTM A-276 or A-479	4	OL	Yes		
D8538-17	Re-Bar 18" 66.00 LG	1 1/2 x 2 RECT BAR 316L SS ASTM A-276 or A-479	6	OL	Yes		
D8538-18	Re-Plate 8" 11.00 OD x 8.75 ID	1/2 PL 316L SS ASTM A-240	20	OL	Yes		
D8562-1	Plate 80.00 x 111.00	1/2 PL 316L SS ASTM A-240	1	OL	Yes		
D8562-2	Plate 5.00 x 109.50	1/4 PL 316L SS ASTM A-240	4	OL	Yes		
D8562-3	S-Beam 111.00 LG	SS x 18.4# CS ASTM A-36	4	OL	Yes		
D8562-4	Beg-Cut Flange	D8538-10 (A9625)	6	OL	Yes		
D8562-5	Door Flange	D8538-11	6	OL	Yes		
D8562-6	Re-Bar Flange	D8538-12	6	OL	Yes		
D8562-7	Round Bar cut to length at assy	1/4 DIA ROD BAR 316L SS ASTM A-276 or ASTM A-479	12	OL	Yes		
D8662-8	Hex HD Bolt 1.75 LG	1/2-13 UNF 316 SS ASTM A-193	36	OL	Yes		
D8662-9	Pad w/ Holes	D8538-1 (A9384)	2	OL	Yes		
D8662-10	Pad	D8538-2 (A9383)	6	OL	Yes		
D8662-11	Pipe 6.75 LG	8 SCH 10 316L SS ASTM A-312	1	OL	Yes		
D8662-12	Flange 14.00 x 16.00	1 PL 316L SS ASTM A-240	1	OL	Yes		
D8662-13	Flange 14.00 x 16.00	1 PL 316L SS ASTM A-240	1	OL	Yes		
D8662-14	Slide 10.50 x 18.75	7 GA SHT 316L SS ASTM A-240	1	OL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D8583-5	O-Ring 9.25 ID	1/4 DIA SOLID NEOPRENE SHORE A DUROMETER McMASTER-CARR	1	QL	Yes	
	D8583-6	Hex HD Bolt 3.00 LG	3/4-10 UNC 316 SS ASTM A-193	8	QL	Yes	
	D8583-7	Hex Nut	3/4-10 UNC 316 SS ASTM A-194	8	QL	Yes	
	D8583-8	Lock Washer	3/4 ID 316 SS	8	QL	Yes	
D8581	D8581-1	Plate 19.31 x 47.85	1/4 PL 316L SS ASTM A-240	1	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
Filter Rack Assy	D8581-2	Plate 10.00 x 47.88	1/4 PL 316L SS ASTM A-240	2	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-3	Plate 5.69 x 47.88	1/4 PL 316L SS ASTM A-240	1	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-4	Plate 2.00 x 22.00	1/4 PL 316L SS ASTM A-240	3	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-5	Plate notch as shown 1.38 x 22.00	1/4 PL 316L SS ASTM A-240	1	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-6	Plate 1.38 x 22.00	1/4 PL 316L SS ASTM A-240	2	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-7	Plate 1.00 x 22.00	1/4 PL 316L SS ASTM A-240	3	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-8	Z-Bar 6.19 x 47.50	12 GA SHT 316L SS ASTM A-240	1	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-9	Z-Bar 6.19 x 47.88	12 GA SHT 316L SS ASTM A-240	2	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-10	Z-Bar 6.69 x 47.88	12 GA SHT 316L SS ASTM A-240	3	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
	D8581-11	Strip 1.00 x 23.75	20 GA SHT 316L SS ASTM A-240	12	CM	No	Does not function to contain melter offgas. This is the internal rack used to hold the discharge filters.
D8582	D8582-1	W-Beam-1 203.26 LG	WB X 31# HRS ASTM A-36	2	QL	Yes	
Base Frame Assy	D8582-2	W-Beam-2 185.25 LG	WB X 31# HRS ASTM A-36	2	QL	Yes	
	D8582-3	W-Beam-3 51.76 LG	WB X 31# HRS ASTM A-36	10	QL	Yes	
	D8582-4	I-Beam-1 97.50 LG	S8 X 19.4# CS ASTM A-36	4	QL	Yes	
	D8582-5	I-Beam-2 81.50 LG	S8 X 18.4# CS ASTM A-36	4	QL	Yes	
	D8582-6	S-Beam 174.75 LG	S6 X 1.73# HRS ASTM A-36	2	QL	Yes	
	D8582-7	Plate-1 12.00 x 12.00	1.0 PL HRS ASTM A-36	10	QL	Yes	
	D8582-8	Plate-2 8.00 x 8.00	3/4 PL HRS ASTM A-36	4	QL	Yes	
	D8582-9	Plate-3 2.00 x 174.75	1/2 PL 316L SS ASTM A-240	2	QL	Yes	
	D8582-10	Hex HD Bolt 2.50 LG	3/4-10 UNC 316 SS ASTM A-193	8	QL	Yes	
	D8582-11	Hex Nut	3/4-10 UNC 316 SS ASTM A-194	8	QL	Yes	
	D8582-12	Lock Washer	3/4 ID 316 SS	8	QL	Yes	
D8583	D8583-1	Channel 18.75 x 97.50	3/16 PL HRS ASTM A-36	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
Platform Assy	D8583-2	Channel 18.25 x 97.50	3/16 PL HRS ASTM A-36	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-3	Channel 6.00 x 250.31	3/16 PL HRS ASTM A-36	4	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-4	Pipe 189.03 LG	1 1/2 SCH 40 CS ASTM A-53	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D8583-5	Pipe 19.53 LG	1 1/2 SCH 40 CS ASTM A-53	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-6	Pipe 60.03 LG	1 1/2 SCH 40 CS ASTM A-53	1	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-7	Pipe 252.90 LG	1 1/2 SCH 40 CS ASTM A-53	1	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-8	Pipe 19.53 LG	1 1/2 SCH 40 CS ASTM A-53	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-9	Pipe 60.03 LG	1 1/2 SCH 40 CS ASTM A-53	1	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-10	Pipe 252.90 LG	1 1/2 SCH 40 CS ASTM A-53	1	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-11	Pipe 40.60 LG	1 1/2 SCH 40 CS ASTM A-53	10	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-12	Pipe 40.50 LG	1 1/2 SCH 40 CS ASTM A-53	4	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-13	Pipe 41.96 LG	1 1/2 SCH 40 CS ASTM A-53	12	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-14	Pipe 16.60 LG	1 1/2 SCH 40 CS ASTM A-53	4	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-15	Pipe 40.60 LG	1 1/2 SCH 40 CS ASTM A-53	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-16	Pipe 57.10 LG	1 1/2 SCH 40 CS ASTM A-53	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D8583-17	Pipe 61.72 LG	1 1/2 SCH 40 CS ASTM A-53	12	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-18	Square Tube 91.50 LG	3 x 3 x 3/16 WT HRS ASTM A-500 GR 8	8	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-19	Square Tube 134.00 LG	3 x 3 x 3/16 WT HRS ASTM A-500 GR 8	8	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-20	Angle 91.50 LG	1 1/2 x 1 1/2 x 3/16 ANGLE HRS ASTM A-36	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-21	Angle 134.00 LG	1 1/2 x 1 1/2 x 3/16 ANGLE HRS ASTM A-36	4	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-22	Plate 2.81 x 19.38	3/16 PL 316L SS ASTM A-36	8	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-23	Plate 2.81 x 5.62	3/16 PL 316L SS ASTM A-36	12	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-24	Plate 3.00 x 6.00	1/4 PL HRS ASTM A-36	4	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-25	Chain 28.00 LG	3/16 304L SS McMASTER-CARR	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-26	Chain 62.50 LG	3/16 304L SS McMASTER-CARR	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-27	Hook 3.00 LG	1/4 DIA BAR HRS ASTM A-36	4	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-28	Flat Bar 11.50 LG	3/16 X 2 FL HRS ASTM A-36	8	CM	No	Does not function to contain melter offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D8583-29	Flat Bar 120.00 LG	3/16 X 2 FL HRS ASTM A-36	8	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-30	Bracket 2.25 LG	1/4 X 4 FL HRS ASTM A-36	4	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-31	Flat Bar 251.00 LG	1/4 X 4 FL HRS ASTM A-36	2	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-32	Flat Bar 157.12 LG	1/4 X 4 FL HRS ASTM A-36	2	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-33	Flat Bar 58.12 LG	1/4 X 4 FL HRS ASTM A-36	2	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-34	Flat Bar 17.62 LG	1/4 X 4 FL HRS ASTM A-36	4	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-35	Grating 29.88 WD x 63.3 LG	1 1/2 X 3/16 BEARING BAR 19-W-4 MIL-G 18014	6	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8483-36	Grating 29.88 WD x 105.0 LG	1 1/2 X 3/16 BEARING BAR 19-W-4 MIL-G 18014	3	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-37	Grating 32.25 WD x 20.5 LG	1 1/2 X 3/16 BEARING BAR 19-W-4 MIL-G 18014	15	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-38	Grating 32.25 WD x 18.0 LG	1 1/2 X 3/16 BEARING BAR 19-W-4 MIL-G 18014	8	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-39	Hex HD Bolt 1.50 LG	1/2-13UNC 316 SS ASTM A-194	4	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8583-40	Hex Nut	1/2-13UNC 316 SS ASTM A-193	4	CM	No	Does not function to contain methanol offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
D8585 Piping Assy 18"	D8585-41	Lock Washer	1/2 ID 316 SS	4	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8585-1	Weld Neck Flange	18 X 150# 316L SS ASTM A-182	20	QL	Yes	
	D8585-2	Ballows Assy 18 OD x OAL BW Ends	2904100-033	4	QL	Yes	
	D8585-3	Butterfly Valve w/ Pneumatic Actuator	2904100-036	2	QL	Yes	
	D8585-4	Straight Tee BW	18 SCH 10 316L SS ASTM A-312	2	QL	Yes	
	D8585-5	Pipe 5.75 LG TOE	1/2 SCH 40 316L SS ASTM A-312	8	QL	Yes	
	D8585-6	Pipe 14.75 LG TOE	1/2 SCH 40 316L SS ASTM A-312	5	QL	Yes	
	D8585-7	90 DEG Elbow SR BW	18 SCH 10 316L SS ASTM A-312	1	QL	Yes	
	D8585-8	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	1	QL	Yes	
	D8585-9	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	1	QL	Yes	
	D8585-10	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	1	QL	Yes	
	D8585-11	Solenoid Valve 1/2"	2904100-023	10	QL	No	
	D8585-12	Temperature Element	2904100-032	3	QL	No	
D8585-13	Ball Valve	1/2" 316 SS W/ TEFLOON SEAL PROTECH	2	QL	Yes		
D8585-14	Hex Head Bolt 3.0 LG	1/8-7UNC 316 SS ASTM A-193	160	QL	Yes		
D8585-15	Flat washer 1 1/8 ID	316 SS	192	QL	Yes		
D8585-16	Thermowell Assy	B8585-3	3	QL	Yes		
D8585-17	90 DEG Elbow LR BW	18 SCH 10 316L SS ASTM A-312	6	QL	Yes		
D8585-18	Butterfly Valve w/ Manual Actuator	2904100-036	4	QL	Yes		
D8585-19	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	2	QL	Yes		
D8585-20	Pipe 6 1/8 LG	2 SCH 40 316L SS ASTM A-312	1	QL	Yes		
D8585-21	Weld Neck Flange	2 X 150# 316L SS ASTM A-182	1	QL	Yes		
D8585-22	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	1	QL	Yes		
D8585-23	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	1	QL	Yes		
D8585-24	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	1	QL	Yes		
D8585-25	18 SCH 10 Pipe	18 SCH 10 316L SS ASTM A-312	1	QL	Yes		
D8585-26	Hex Head Bolt 5.0 LG	1/8-7UNC 316 SS ASTM A-193	16	QL	Yes		
D8585-27	Hex Head Nut	1/8-7UNC 316 SS ASTM A-193	16	QL	Yes		
D8585-28	Solenoid Valve 1/2"	2904100-023	1	QL	No		
D8585-1	Pipe cut at assy	2 SCH 40 316L SS ASTM A-312	60 ft	QL	Yes		
D8585-2	Weld Neck Flange	2 X 150# 316L SS ASTM A-182	7	QL	Yes		
D8585-3	90 DEG Elbow	2 SCH 40 316L SS ASTM A-182	7	QL	Yes		
D8585-4	Tee BW	2 SCH 40 316L SS ASTM A-182	1	QL	Yes		
D8585-5	Gasket 2.12 ID x 3.62 OD	1/8 THK COMMERCIAL GRADE VITON RUBBER	7	QL	Yes		
D8585-6	Rupture Disc 2" Pipe Size 15 PSI	McMASTER-CARR	2	QL	Yes		
D8585-7	Hex HD Bolt 2.50 LG	5/8-11UNC 316 SS ASTM A-193	12	QL	Yes		
D8585-8	Hex HD Bolt 3.00 LG	5/8-11UNC 316 SS ASTM A-193	8	QL	Yes		
D8585-9	Hex Nut	5/8-11UNC 316 SS ASTM A-194	20	QL	Yes		
D8585-1	Flat Bar 159.3 LG	1/2 X 2 1/2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	
D8585-2	Flat Bar 35.3 LG	1/2 X 2 1/2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	
D8585-3	Flat Bar 5.5 LG	1/2 X 2 1/2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
	D8588-4	Flat Bar 10.25 LG	1/4 x 2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8588-5	Ladder Rung 17.00 LG	3/4 RD BAR ASTM A-36	14	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8588-6	Flat Bar 13.00 LG	1/4 x 2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8588-7	Flat Bar 8.00 LG	1/4 x 2 FL HRS ASTM A-36	2	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8588-8	Arilslip Tape 2 WID x 15 LG	McMASTER-CARR	14	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
D8589 Housing Assy	D8589-1	Housing Widrnt Unit A	D8527	1	QL	Yes	
	D8589-2	Manway Cover	D8538-14	2	QL	Yes	
	D8589-3	Slide Gate Assy	D8563	6	QL	Yes	
	D8589-4	Access Door Discharge Filter	D8224	3	QL	Yes	
	D8589-5	Carbon Sample Plug Assy	B8597	3	QL	Yes	
	D8589-6	Deleted					
	D8589-7	Blind Flange Modified	6 x 150# 316L SS ASTM A-182	3	QL	Yes	
	D8589-8	Blind Flange	8 x 150# 316L SS ASTM A-182	7	QL	Yes	
	D8589-9	Pipe Plug Hex Threaded	1 1/4 x 300# 316L SS	3	QL	Yes	
	D8589-10	Pipe Coupling Threaded	1 1/4 x 300# 316L SS	3	QL	Yes	
	D8589-11	Temperature Element 27"	2804100-046	2	CM	No	Only the two inlet temperature elements and transmitter have been specified ITS. Mid bed temperature elements and transmitters are commercial.
	D8589-12	Temperature Element 69"	2804100-046	2	CM	No	Only the two inlet temperature elements and transmitter have been specified ITS. Mid bed temperature elements and transmitters are commercial.
	D8590 Housing Assy	D8589-13	Blind Flange	1-1/2 x 150# 316L SS ASTM A-182	2	QL	Yes
D8589-14		Stemmed Valve 1/2"	2804100-023	1	QL	No	
D8589-15		Manual Valve 1/2"	2804100-019	4	QL	Yes	
D8589-16		Bell Valve 2"	1/2" 316 SS W/ TEF LON SEAL PROTECH	2	QL	Yes	
D8589-17		Gasket B/O Door 4.75 x 25.00 ID Vulcanized Corners	1/2 THK x 1 WD COMMERCIAL GRADE VITON RUBBER	12 ft	QL	Yes	
D8589-18		Gasket 8" Flange 8.62 ID x 10.62 OD	1/8 THK COMMERCIAL GRADE VITON RUBBER	10	QL	Yes	
D8589-19		Gasket Manway 16.5 ID x 18.5 OD	1/8 THK COMMERCIAL GRADE VITON RUBBER	2	QL	Yes	
D8589-20		Hex Nut	1/2-13 UNC 316 SS ASTM A-194	36	QL	Yes	
D8589-21		Hex Nut	3/4-10 UNC 316 SS ASTM A-194	112	QL	Yes	
D8589-22		Hex HD Bolt 2.50 LG	3/4-10 UNC 316 SS ASTM A-193	32	QL	Yes	
D8589-23		Hex HD Bolt 3.50 LG	3/4-10 UNC 316 SS ASTM A-193	80	QL	Yes	
D8589-24		Flat Washer	1/2 ID 316 SS	36	QL	Yes	
D8589-25		Flat Washer	3/4 ID 316 SS	112	QL	Yes	
D8589-26		Flat Washer	D8660	1	QL	Yes	
D8589-27		Init Pipe Support	D8661	2	QL	Yes	
D8589-28		Pipe Support	D8661	2	QL	Yes	
D8590-1		Housing Widrnt Unit B	D8528	1	QL	Yes	
D8590-2		Manway Cover	D8538-14	2	QL	Yes	
D8590-3	Slide Gate Assy	D8563	6	QL	Yes		

24590-WTP-3 PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
D8594 Final Assy	D8590-4	Access Door Discharge Filler	D8224		QL	Yes	
	D8590-5	Carbon Sample Plug Assy	B8587	3	QL	Yes	
		Deleted					
	D8590-7	Blind Flange Modified	8 x 150# 316L SS ASTM A-182	3	QL	Yes	
	D8590-8	Blind Flange	8 x 150# 316L SS ASTM A-182	7	QL	Yes	
	D8590-9	Pipe Plug Hex Threaded	1 1/4 x 150# 316L SS	3	QL	Yes	
	D8590-10	Pipe Coupling Threaded	1 1/4 x 300# 316L SS	3	QL	Yes	
	D8590-11	Temperature Element 2"	2804100-046	2	CM	No	Only the two inlet temperature elements and transmitter have been specified ITS. Mid bed temperature elements and transmitters are commercial.
	D8590-12	Temperature Element 65"	2904100-046	2	CM	No	Only the two inlet temperature elements and transmitter have been specified ITS. Mid bed temperature elements and transmitters are commercial.
	D8590-13	Blind Flange	1-1/2 x 150# 316L SS ASTM A-182	2	QL	Yes	
	D8590-14	Stemmed Valve 1/2"	2904100-023	1	QL	No	
	D8590-15	Manual Valve 1/2"	2904100-019	4	QL	Yes	
	D8590-16	Ball Valve 2"	1/2" 316 SS W/ TEFLON SEAL PROTECH	2	QL	Yes	
	D8590-17	Gasket B/O Door	VITON	12#	QL	Yes	
	D8590-18	Gasket 6" Flange	SPIRAL WOUND GRAPHIC, 316 SS	10	QL	Yes	
	D8590-19	Gasket Manway	VITON	2	QL	Yes	
	D8590-20	Hex Nut	1/2-13UNC 316 SS ASTM A-194	36	QL	Yes	
	D8590-21	Hex Nut	3/4-10UNC 316 SS ASTM A-194	112	QL	Yes	
	D8590-22	Hex HD Bolt 2.50 LG	3/4-10UNC 316 SS ASTM A-193	32	QL	Yes	
	D8590-23	Hex HD Bolt 3.50 LG	3/4-10UNC 316 SS ASTM A-193	80	QL	Yes	
	D8590-24	Flat Washer	1/2 ID 316 SS	36	QL	Yes	
	D8590-25	Flat Washer	3/4 ID 316 SS	112	QL	Yes	
		Deleted					
	D8590-27	Pipe Support	D8661	3	QL	Yes	
	D8594-1	Base Frame Assy LVP-ADBR-00001 Unit A/B	D8582	1	QL	Yes	
	D8594-2	Housing Assy LVP-ADBR-00001 Unit A/B	D8589	1	QL	Yes	
	D8594-3	Housing Assy LVP-ADBR-00001 Unit B	D8590	1	QL	Yes	
D8594-4	Platform Assy LVP-ADBR-00001 Unit A/B	D8583	1	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance platform are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	
D8594-5	Ladder Assy LVP-ADBR-00001 Unit A/B	D8588	1	CM	No	Does not function to contain meller offgas. Parts and components associated with the maintenance ladder are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	
D8594-6	Crane Trolley Assy LVP-ADBR-00001 Unit A/B	D8601	1	CM	No	Does not function to contain meller offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	
D8594-7	Inlet Pipe Assy LVP-ADBR-00001 Unit A/B	D8585-1	1	QL	Yes		
D8594-8	Crossover Pipe Assy LVP-ADBR-00001 Unit A/B	D8585-2	1	QL	Yes		
D8594-9	Outlet Pipe Assy LVP-ADBR-00001 Unit A/B	D8585-3	1	QL	Yes		
D8594-10	Crossover Pipe Assy LVP-ADBR-00001 Unit A/B	D8585-4	1	QL	Yes		
D8594-11	Pipe Assy LVP-ADBR-00001 Unit A/B	D8586	1	QL	Yes		
D8594-12	Spacer 1/4 THK 6.0 x 6.0	ALUMINA SILICATE CERAMIC McMASTER-CARR	20	QL	Yes		
D8594-13	Spacer 1/4 THK 3.0 x 6.0	ALUMINA SILICATE CERAMIC McMASTER-CARR	20	QL	Yes		
D8594-14	Gasket 2"	SPIRAL WOUND GRAPHIC, 316 SS	10	QL	Yes		
D8594-15	Gasket 18"	SPIRAL WOUND GRAPHIC, 316 SS	20	QL	Yes		

24590-WTP-3PS-MWKO-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS	
D8601	D8594-16	Hex HD Bolt 5.00 LG	1 1/8-7UNC 316 SS ASTM A-193	96	QL	Yes		
	D8594-17	Hex HD Bolt 3.00 LG	1 1/8-7UNC 316 SS ASTM A-193	32	QL	Yes		
	D8594-18	Hex Nut	1 1/8-7UNC 316 SS ASTM A-193	96	QL	Yes		
	D8594-19	Hex HD Bolt 2.50 LG	5/8-11UNC 316 SS ASTM A-193	4	QL	Yes		
	D8594-20	Hex HD Bolt 3.00 LG	5/8-11UNC 316 SS ASTM A-193	8	QL	Yes		
	D8594-21	Hex Nut	5/8-11UNC 316 SS ASTM A-193	12	QL	Yes		
	D8594-22	Hex HD Bolt 1.50 LG	3/4-10UNC 316 SS ASTM A-193	16	QL	Yes		
	D8594-23	Hex HD Bolt 2.00 LG	3/4-10UNC 316 SS ASTM A-193	80	QL	Yes		
	D8594-24	Hex Nut	3/4-10UNC 316 SS ASTM A-193	96	QL	Yes		
	D8594-25	Lock Washer	1/2 ID 316 SS	160	QL	Yes		
	D8594-26	Flat Washer	1/2 ID x 1.25 OD 316 SS	160	QL	Yes		
	D8594-27	Insulation	CALCIUM-SILICATE THERMO-12 R GOLD INDUSTRIAL INSULATION GROUP / JOHN'S MANVILLE	1200 cuft	N/A	N/A	Supplied by others	
	D8554-28	High Temperature Adhesive	CALBOND R GOLD HIGH TEMP ADHESIVE INDUSTRIAL INSULATION GROUP / JOHNS MANVILLE	A/R	N/A	N/A	Supplied by others	
	D8594-29	Sealing Caulk	PERMATEX L-TEMP RED RTV	A/R	N/A	N/A	Supplied by others	
	D8594-30	Hex HD Bolt 2.50 LG	3/4-10UNC 316 SS ASTM A-193	8	QL	Yes		
	D8594-31	Hex Nut	3/4-10UNC 316 SS ASTM A-193	8	QL	Yes		
	D8594-32	Lock Washer	3/4 ID 316 SS	8	QL	Yes		
	D8601-1	I-Beam 25'-0" LG		8 x 18.4# HRS ASTM A-36	1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-2	I-Beam 23'-6" LG		8 x 18.4# HRS ASTM A-36	1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-3	Angle 4.00 LG		2 x 2 x 1/4 ANGLE HRS ASTM A-36	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-4					CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-5	Plate 4.00 x 8.00		1/4 PLR HRS ASTM A-36	1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-6	Hex HD Bolt 2.00 LG		1/2-13UNC GR 8 PL STL	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-7	Hex Nut		1/2-13UNC GR 8 PL STL	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-8	Lock Washer		1/2 NOM ID GR 8 PL STL	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-9	Electric Hoist 2000# Cap 25 ft Lift @ 16ft/Min Push MCMASTER-CARR Trolley Mounted			1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8660-1	S-Beam 40.50 LG		S6 x 12.5# HRS ASTM A-36	1	QL	Yes	

24590-WTP-3PS-MWK0-T0001, Rev 4
Activated Carbon Bed Adsorbers

Drawing Number	Item No.	Description	Material or Vendor	QTY	QL/CM	CGD	COMMENTS
D8601	D8594-16	Hex HD Bolt 5.00 LG	1-1/8-7UNC 316 SS ASTM A-193	96	QL	Yes	
	D8594-17	Hex HD Bolt 3.00 LG	1-1/8-7UNC 316 SS ASTM A-193	32	QL	Yes	
	D8594-18	Hex Nut	1-1/8-7UNC 316 SS ASTM A-193	96	QL	Yes	
	D8594-19	Hex HD Bolt 2.50 LG	5/8-11UNC 316 SS ASTM A-193	4	QL	Yes	
	D8594-20	Hex HD Bolt 3.00 LG	5/8-11UNC 316 SS ASTM A-193	8	QL	Yes	
	D8594-21	Hex Nut	5/8-11UNC 316 SS ASTM A-193	12	QL	Yes	
	D8594-22	Hex HD Bolt 1.50 LG	3/4-10UNC 316 SS ASTM A-193	16	QL	Yes	
	D8594-23	Hex HD Bolt 2.00 LG	3/4-10UNC 316 SS ASTM A-193	80	QL	Yes	
	D8594-24	Hex Nut	3/4-10UNC 316 SS ASTM A-193	96	QL	Yes	
	D8594-25	Lock Washer	1/2 ID x 1.25 OD 316 SS	96	QL	Yes	
	D8594-26	Flat Washer	1/2 ID x 1.25 OD 316 SS	160	QL	Yes	
	D8594-27	Insulation	CALCIUM-SILICATE THERMO-12 R	1200 cuft	N/A	N/A	Supplied by others
	D8594-28	High Temperature Adhesive	GOLD INDUSTRIAL INSULATION GROUP / JOHNS MANVILLE	AVR	N/A	N/A	Supplied by others
	D8594-29	Sealing Caulk	PERMATEX I-TEMP RED RTV	AVR	N/A	N/A	Supplied by others
	D8594-30	Hex HD Bolt 2.50 LG	3/4-10UNC 316 SS ASTM A-193	8	QL	Yes	
	D8594-31	Hex Nut	3/4-10UNC 316 SS ASTM A-193	8	QL	Yes	
	D8594-32	Lock Washer	3/4 ID 316 SS	8	QL	Yes	
	D8601-1	I-Beam 25-0" LG	8 x 18.4# HRS ASTM A-36	1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-2	I-Beam 23-6" LG	8 x 18.4# HRS ASTM A-36	1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-3	Angle 4.00 LG	2 x 2 x 1/4 ANGLE HRS ASTM A-36	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-4				CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-5	Plate 4.00 x 8.00	1/4 PL HRS ASTM A-36	1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-6	Hex HD Bolt 2.00 LG	1/2-13UNC GR 8 PL STL	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
	D8601-7	Hex Nut	1/2-13UNC GR 8 PL STL	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.
D8601-8	Lock Washer	1/2 NOM ID GR 8 PL STL	2	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	
D8601-9	Electric Hoist 2000# Cap 25ft Lift @ 16ft/MIN Push Trolley Mounted	McMASTER-CARR	1	CM	No	Does not function to contain melter offgas. Parts and components associated with the crane trolley are external to the pressure boundary and are not used to support the carbon bed adsorber housing.	
D8660	S-Beam 40.50 LG	S6 x 12.5# HRS ASTM A-36	1	QL	Yes		

Appendix A

Mandatory Ammonium Nitrate Test Requirements for LAW Carbon Bed Adsorbers

Appendix A

Mandatory Ammonium Nitrate Test Requirements for LAW Carbon Bed Adsorbers

1.0 Purpose

The purpose of appendix A testing is to determine if sufficient amounts of ammonium nitrate can form in the LAW offgas pipeline, in the guard bed, and in the activated carbon bed adsorber media to increase the propagation rate of a bed fire.

2.0 Overview

The potential for ammonia and nitrous oxides to form ammonium nitrate within the LAW carbon bed adsorber media is unknown. A significant accumulation of ammonium nitrate within the bed media has been raised as a fire safety concern. It is postulated that ammonium nitrate may increase the rate a bed fire propagates, potentially modifying the current bed-fire mitigation strategy. It should be noted that VSL carbon bed testing has shown large temperature exotherms resulting from NO_x. It may be necessary to condition the carbon media before testing with large NO_x concentrations.

3.0 Objectives

1. Test 1 - Determine formation of NH₄NO₃ in the proposed LAW activated carbon adsorber media(s) configuration if the inlet gas contains NO_x and NH₃.
2. Test 2 - Assess the hazards associated with NH₄NO₃ adsorbed in the proposed LAW activated carbon adsorber media(s), (i.e. fire propagation).

4.0 Quality Assurance

Tests shall be performed in accordance with the applicable sections of NQA-1. The Test Plan will include a matrix cross-referencing the QA requirements to implementing procedures for the work, and justifying elements that are not applicable.

5.0 Test Conditions

Each of the tests in the following sections have been formulated to address the test objectives from Section 3.

The activated carbon beds proposed for the LAW off gas systems will operate under the conditions defined in mechanical data sheets. The appropriate media for each test will be selected and described in the Vendor Test Plan. The Test Plan will detail the test conditions and data collection for each test based on the media and operating conditions.

Testing will be done with a bench scale apparatus using air and water for humidity as the bulk gas.

Carbon test beds shall be insulated such that the temperature drop across the beds does not exceed 1.0 °C with dry hot air passing through the test beds at the test temperature.

- 5.1 Test 1 - Determine NH_4NO_3 formation in the proposed LAW activated carbon adsorption system(s).
 - a. Test conditions
 - Sorbent - By vendor
 - Bed residence time - By vendor
 - Superficial gas velocity - by vendor
 - Inlet HEPA temperature - 50 °C (bounding case in exception with mechanical data sheets)
 - Relative humidity - 50 % (bounding case in exception with mechanical data sheets)
 - Gas composition:
 - a. Bulk gas - Air and water vapor
 - b. Other constituents -
 - i. Inlet NH_3 concentration - 10 ppm
 - ii. Inlet CO concentration - 170 ppm
 - iii. Inlet NO concentration - 4000 ppm
 - iv. Inlet NO_2 concentration - 4000 ppm
 - Inlet gas HEPA filtered to remove particulate ammonium nitrate formed prior to the carbon bed with two AG-1 certified HEPA filters operating in series.
 - Eight (8) seconds gas residence time to simulate ammonium nitrate formation, prior to HEPA filtration.
 - Residence time from the HEPA filters to the carbon bed is specified as 2.8 seconds.
 - b. Test duration
 - By vendor
 - c. Data to be obtained
 - Inlet and outlet NO, NO_2 , NH_3 concentrations.
 - Quantity of NH_4NO_3 - accumulated in the pipeline, HEPAs, and bed media at the end of test.
 - Temperature profile of bed during loading.
- 5.2 Test 2 - Perform standard calorimeter test (i.e., ASTM E 1623-04 or equivalent) to measure exotherm of new bed media compared to bed media containing two years of accumulated ammonium nitrate.
- 5.3 Test 3 - If a substantial quantity of ammonium nitrate or a substantial exotherm is determined, re-run Test 1 and Test 2 with the addition of offgas pre-heat to 70 °C just prior to HEPA filtration.
- 5.4 Test 4 - If a substantial (>140 °F) temperature change is measured in the bed, re-run Test 1 with 50% of the NO and NO_2 concentrations.

6.0 Success Criteria

1. Quantization of ammonium nitrate formed in-situ on bed media, extrapolated to a two-year bed life.
2. Calorimeter test data of new bed media compared to bed media containing ammonium nitrate accumulated in two-years of bed life.
3. If Test 1 does not yield detectable levels of ammonium nitrate on the bed media, detection level shall be assumed and extrapolated to a two-year bed life. If Test 3 does not yield detectable levels of ammonium nitrate on the bed media, Test results shall take special note of this observation with no extrapolation to a two-year bed life.

Appendix B

Warranty Testing

Appendix B

Warranty Testing (by *BUYER*)

1.0 Purpose

The purpose of appendix B testing is to validate performance guarantees related to removal efficiencies and design life for the carbon bed adsorber media in a prototypic LAW and HLW offgas.

2.0 Overview

Mercury is present in many of the DOE's mixed wastes including the high-level tank wastes, which will be processed in the WTP. When this waste is processed in the WTP Low-Activity Waste (LAW) and High-Level Waste (HLW) melter systems, the resulting offgas will contain mercury (Hg) and hydrogen fluoride (HF). Sulfur-activated carbon (S-AC) has been successfully used to remove mercury from offgas. However, it has generally been used with elemental mercury and under conditions that are not representative of WTP melter offgas. Concerns related to the adsorption behavior of elemental and oxidized forms of mercury, such as mercuric chloride, have been raised regarding mercury removal efficiency and breakthrough capacity, which could have a direct impact on sizing of the adsorption system and the frequency at which S-AC must be changed. Test apparatus will include two adsorbent columns (lead and lag adsorbers), each with guard and primary activated carbon media as described in the mechanical data sheets (24590-HLW-MVD-HOP-00011, 24590-HLW-MVD-HOP-20011, 24590-LAW-MVD-LVP-00004), representative of the WTP Lead and Lag Adsorbers.

VSL testing demonstrated that a rapid temperature rise resulted when water vapor was introduced to Kombisorb BAT-37. A temperature increase rapidly progressed through the VSL test bed. However, media temperatures quickly returned to normal as the bed became acclimated to water (except for heat losses). Introduction of NO_x to the Kombisorb BAT 37 resulted in an initial temperature rise followed by a gradual temperature reduction as the media became acclimated to the NO_x (elevated temperatures continued as long as NO_x feed continued). Because virgin activated carbon media had a much greater sensitivity to NO_x, it was necessary to establish a procedure for ramping feed of NO_x to the bed (referred to as conditioning). The addition of Organics is very important, however acetonitrile (to be used in this phase of the testing) did not show much of a temperature effect. Nonetheless, the INL test plan should include a separate ramp procedure for NO_x and organics.

VSL testing only evaluated the primary bed material, Kombisorb BAT 37. Because it may be possible that other important temperature effects may exist within the guard bed material, Kombisorb ZA-37, the testing shall also address the effects that the simulant offgas stream composition may have on the guard bed media temperature.

VSL testing identified the need to condition virgin Kombisorb BAT 37 to water, NO_x, and organics. The Vendor Test Plan shall address conditioning of virgin activated carbon media, based on review of the following VSL steps:

- As NO_x and organic ramping is initiated, actions should be taken to either stop ramps or reduce rates at a temperature threshold of 120°C.

- As NO_x and organic approach full rates and during steady state operations, temperatures up to 130°C are permissible.
- Organic feed shall be stopped if activated carbon media temperature exceeds 130°C.
- If at any time the carbon media temperature reaches 140°C, both NO_x and organic feed shall be stopped.

Steady-state for the activated carbon adsorbers will be reached when the gas outlet temperature for the lag bed operates at less than a 1°C change for one hour and monitoring of total hydrocarbons (THC) is maintained within a 1 to 3% variation for one hour. Once steady-state media temperatures and THC concentrations are reached, introduction of mercury to the test apparatus may be initiated.

3.0 Objectives

1. Test 1 - Determine removal efficiency and loading of mercury on the guard and primary beds for the lead and lag adsorbers with HLW simulated offgas. Confirm compliance with removal efficiency requirements and 12 month design life for the HLW lead adsorber. Confirm that the maximum media operating temperatures in the lead and lag adsorbers are below 130°C.
2. Test 2 - Determine removal efficiency and loading of mercury, hydrogen chloride, hydrogen fluoride, and iodine on the guard and primary beds for the lead and lag adsorber with LAW simulated offgas. Confirm compliance with removal efficiency requirements and 24 month design life for LAW lead adsorber. Confirm that the maximum media operating temperatures in the lead and lag adsorbers are below 130°C.

4.0 Quality Assurance

Tests shall be performed in accordance with the applicable sections of NQA-1. The Test Plan will include a matrix cross-referencing the QA requirements to implementing procedures for the work, and justifying elements that are not applicable.

5.0 Test Conditions

Each of the tests in the following sections have been formulated to address the test objectives from Section 3.

The activated carbon beds proposed for the HLW and LAW off gas systems will operate under the conditions defined in mechanical data sheets (24590-HLW-MVD-HOP-00011, 24590-HLW-MVD-HOP-20011, 24590-LAW-MVD-LVP-00004). The appropriate media for each test will be selected and described in the Vendor Test Plan. The Test Plan will detail the test conditions and data collection for each test based on the media and operating conditions, including steps for conditioning of virgin activated carbon media.

Testing will be done with a bench scale apparatus using air and water for humidity as the bulk gas.

Carbon test beds shall be insulated such that the temperature drop across the beds does not exceed 1.0°C with dry hot air passing through the test beds at test temperatures. Heat tracing may also be used in combination with the insulation as a means to compensate for differences between size of the test apparatus and the WTP activated carbon units. If heaters are used, the minimum number of zone controls shall be 4 (1 for the guard and 1 for the primary activated carbon media sections in both the lead and lag adsorbers).

5.1 Test 1 - Measure mercury removal efficiency and the mercury profile through the adsorbent bed using a simulated HLW offgas that includes acetonitrile.

A. Test conditions:

- Sorbent - Donau Kombisorb BAT 37 and ZA 37
- Residence time - by vendor, to match Mechanical Data Sheet
- Superficial gas velocity - by vendor, to match Mechanical Data Sheet
- Inlet temperature - $94^{\circ}\text{C} \pm 0.5^{\circ}\text{C}$
- Mercury concentration - $52,600 \mu\text{g/dscm} \pm 50 \mu\text{g/dscm}$
- Relative humidity - $18.6\% \pm 1\%$
- Gas composition (actual composition):
 - a. Bulk gas - Air and water vapor
 - b. Concentration of organic:
 - i. acetonitrile - $2 \text{ ppm} \pm 0.05 \text{ ppm}$
 - c. Other components
 - i. CO_2 - $0.4\% \pm 0.03\%$
 - ii. CO - $5.2 \text{ ppm} \pm 0.2 \text{ ppm}$
 - iii. NO - $480 \text{ ppm} \pm 10 \text{ ppm}$
 - iv. NO_2 - $370 \text{ ppm} \pm 10 \text{ ppm}$
 - v. HF - $6.2 \text{ ppm} \pm 0.2 \text{ ppm}$

B. Test duration:

- Initial period to condition the virgin sorbents with the test gases and to reach steady-state operations.
- 100 hours (continuous operation) or until breakthrough of mercury.

C. Data to be obtained:

- Measure Total Hydrocarbons at the outlet of the lead and lag adsorbers
- Measure inlet and outlet mercury concentrations for the lead and lag adsorbers.
- Measure mercury profile in the lead and lag adsorbers (guard and primary beds) at end of test.
- Measure inlet and outlet offgas temperatures of lead and lag adsorbers.
- Measure sulfur content of three representative samples of virgin primary media and three representative samples of primary media taken after completion of testing from the location where maximum bed temperature was reached.
- Media temperature at two equally spaced locations along the centerline of the guard bed and primary bed for both the lead and lag adsorbers (total of 4 per adsorber).
- Time at which breakthrough occurs (if realized) for any adsorbed constituents for the lead and lag adsorbers. Breakthrough is defined as the concentration at which emissions reaches 50% of the specified removal efficiency. For example, breakthrough for mercury would be $26.3 \mu\text{g/dscm}$ using the DF of 1000 and maximum mercury loading of $52,552 \mu\text{g/dscm}$ shown in the mechanical data sheets.
- Limits established for step changes to NO_x concentrations (and any other limiting gas stream components determined by testing).

D. Calculations:

- Hg removal efficiency and loading (mercury profile) for the lead and lag adsorbers.
- Estimated time for breakthrough of Hg for the lead and lag test adsorbers and for the WTP lead and lag adsorbers. (Mercury concentration specified in section A is the maximum concentration required for removal efficiency calculations. Design life shall be a ratio based on nominal mercury concentration 7,608 µg/dscm.)
- Correlation of lead and lag adsorber guard and primary bed temperatures and offgas constituents.
- Analysis of the impact of key gas components on sorbent temperatures during conditioning and operational phases.

E. Performance:

- Mercury removal efficiency - 99.9%
- Carbon media temperature maintained below maximum operating temperature (130°C)
- Media Design life - 12 months (WTP lead adsorber)

5.2 Test 2 - Measure mercury, hydrogen fluoride, and hydrogen chloride, and Iodine removal efficiencies through the adsorbent beds and organic removal using a simulated LAW offgas that also includes acetonitrile.

A. Test conditions

- Sorbents – Donau Kombisorb BAT 37 and ZA 37
- Residence time – by vendor to match mechanical data sheet
- Superficial gas velocity – by vendor to match mechanical data sheet
- Inlet temperature – 105 °C ± 0.5 °C (*Nominal Condition on Mechanical Data Sheet*)
- Mercury concentration - 24,000 µg/dscm ± 50 µg/dscm
 - Elemental mercury 85wt% ± 1 wt% Hg⁰
 - Oxidized mercury 15wt% ± 1 wt% Hg⁺² (HgCl₂)
- Relative humidity – 10.2 % ± 1% (*Nominal Condition on Mechanical Data Sheet*)
- Gas composition (actual composition):
 - Bulk gas – Air and water vapor
 - Concentration of organic:
 - acetonitrile – 50 ppm ± 1.5 ppm
 - Inlet hydrogen chloride (HCl) concentration - 46 ppm ± 1.5 ppm
 - Inlet hydrogen fluoride (HF) concentration - 2.8 ppm ± 0.1 ppm
 - Inlet iodine (I) concentration - 1.0 ppm ± 0.1 ppm
 - Other components:
 - Inlet CO concentration - 480 ppm ± 10 ppm
 - Inlet NO concentration - 3800 ppm ± 50 ppm
 - Inlet NO₂ concentration - 5600 ppm ± 50 ppm
 - Inlet CO₂ concentration - 1.2% ± 0.5%
 - Inlet SO₂ concentration - 5.0 ppm ± 0.1 ppm

B. Test duration:

- Initial period to condition the virgin sorbent with the test gases and to reach steady-state operations.
- 100 hours or until breakthrough of mercury (Continuous).

C. Data to be obtained:

- Measure Total Hydrocarbons at the outlet of the lead and lag adsorbers
- Measure inlet and outlet mercury concentrations for the lead and lag adsorbers.
- Measure mercury profile in the lead and lag adsorbers (guard and primary beds) at end of test.
- Measure inlet and outlet hydrogen fluoride concentrations of the lead and lag adsorbers.
- Measure inlet and outlet hydrogen chloride concentrations of the lead and lag adsorbers.
- Measure inlet and outlet Iodine concentrations of the lead and lag adsorbers.
- Measure inlet and outlet organic concentrations of the lead and lag adsorbers.
- Measure inlet and outlet offgas temperatures of the lead and lag adsorbers.
- Measure sulfur content of three representative samples of virgin primary media and three representative samples of primary media taken after completion of testing from the location where maximum bed temperature was reached.
- Media temperature at two equally spaced locations along the centerline of the guard bed and primary bed for both the lead and lag adsorbers (total of 4 per adsorber).
- Time at which breakthrough occurs (if realized) for any adsorbed constituents for the lead and lag adsorbers.
- Limits established for step changes to NO_x concentrations (and any other limiting gas stream components determined by testing).

D. Calculations:

- Mercury removal efficiency and loading (mercury profile) for the lead and lag adsorbers.
- Estimated time for breakthrough of mercury for the lead and lag test adsorbers and for the WTP lead and lag adsorbers. (Mercury concentration specified in Section A is the maximum concentration required for DRE. Design life shall be a ratio based on nominal mercury concentration 320 µg/dscm).
- Iodine removal efficiency and loading for the lead adsorber.
- Estimated time for breakthrough of iodine for the test lead and lag test adsorber and for the WTP lead and lag adsorbers.
- Hydrogen fluoride removal efficiency and loading for the lead adsorber.
- Estimated time for lead and lag adsorber breakthrough of hydrogen fluoride for the lead and lag test adsorbers and for the WTP adsorbers.
- Hydrogen chloride removal efficiency and loading for the lead and lag adsorbers.
- Estimated time for breakthrough of hydrogen chloride for the lead and lag test adsorber and for the WTP adsorbers.
- Correlation of lead and lag adsorber guard and primary bed temperatures and offgas constituents.
- Analysis of the impact of key gas components on sorbent temperatures during conditioning and operational phases.

E. Performance:

- Mercury removal efficiency - 99.8%
- Hydrogen chloride removal efficiency - 97%.
- Hydrogen fluoride removal efficiency - 97%

- Iodine removal efficiency - 99%
- Carbon media temperature maintained below maximum operating temperature (130°C)
- Design life - 24 months (WTP lead adsorber)

6.0 Success Criteria

1. Verification that specified removal efficiencies for required offgas constituents are achieved.
2. Quantization of load profiles for required offgas constituents and verification of WTP bed life.
3. Verification that carbon media temperature controls maintain carbon media temperature below its maximum allowable operating temperature of 130°C.

Appendix C

Permit Testing

Appendix C

Permit Testing (by *BUYER*)

1.0 Purpose

The purpose of appendix C testing is to determine removal efficiency and loading of spiked organics for WTP offgas permitting.

2.0 Overview

Test apparatus shall consist of two adsorbent columns (each with guard and primary activated carbon media) as described in mechanical data sheets (MDSs), representing the WTP Lead and Lag Adsorbers.

Permit requirements for the WTP melter offgas systems specify compliance with Maximum Achievable Control Technology (MACT) incinerator standards for mercury and organic (VOC and SVOC) destruction. The WTP project has conducted systems tests at the Vitreous State Laboratory (VSL) of the melter offgas systems, to determine if the offgas systems, as designed, will meet MACT requirements. However, the test carbon bed used at VSL did not contain a guard bed and in other respects (e.g., gas residence time) the VSL test bed was not representative of the WTP carbon bed design. VSL testing has also shown large temperature exotherms exist, resulting from NO_x and organics (allyl alcohol and naphthalene) in the offgas stream.

VSL testing only evaluated the primary bed material, Kombisorb BAT 37. Because it may be possible that other important temperature effects may exist within the guard bed material, Kombisorb ZA 37, the testing shall also address the effects the simulant offgas stream composition may have on guard bed media temperature.

VSL testing identified the need to condition virgin Kombisorb BAT 37 to water, NO_x, and organics. The Vendor Test Plan shall address conditioning of virgin activated carbon media, based on review of the following VSL steps:

- As NO_x and organic ramping is initiated, actions should be taken to either stop ramps or reduce rates at a temperature threshold of 120°C.
- As NO_x and organic approach full rates and during steady state operations, temperatures up to 130°C are permissible.
- Organic feed shall be stopped if activated carbon media temperature exceeds 130°C.
- If at any time the carbon media temperature reaches 140°C, both NO_x and organic feed shall be stopped.

Steady-state for the activated carbon adsorbers will be reached when the gas outlet temperature for the lag bed operates at less than a 1°C change for one hour and monitoring of total hydrocarbons (THC) is maintained within a 1 to 3% variation for one hour. Once steady-state media temperatures and THC concentrations are reached, introduction of mercury to the test apparatus may be initiated.

3.0 Objectives

1. Test 1 - Determine removal efficiency and loading of mercury, allyl alcohol, and naphthalene on the guard and primary test beds for the lead and lag adsorbers with HLW simulated offgas. Measure

media temperatures and establish maximum allowable changes in NO_x and allyl alcohol concentrations required to maintain control of bed temperatures due to adsorption and exothermic reactions. Confirm that the maximum media operating temperatures in the lead and lag adsorbers are below 130°C.

2. Test 2 - Determine removal efficiency and loading of mercury, hydrogen chloride, allyl alcohol, and naphthalene on the guard and primary test beds for both lead and lag adsorbers with LAW simulated offgas. Measure media temperatures and establish maximum allowable changes in NO_x and allyl alcohol concentrations required to maintain control of bed temperatures due to adsorption and exothermic reactions. Confirm that the maximum media operating temperatures for the lead and lag adsorbers are below 130°C.

4.0 Quality Assurance

Tests shall be performed in accordance with the applicable sections of NQA-1. The Test Plan will include a matrix cross-referencing the QA requirements to implementing procedures for the work, and justifying elements that are not applicable.

5.0 Test Conditions

Each of the tests in the following sections have been formulated to address the test objectives from Section 3.

The activated carbon beds proposed for the HLW and LAW off gas systems will operate under the conditions defined in this section of Appendix C. The appropriate media for each test will be selected and described in the Vendor Test Plan. Test media shall be consistent with that proposed for the WTP carbon bed adsorbers. The Test Plan will detail the test conditions and data collection for each test based on the media and operating conditions, including steps for conditioning of virgin activated carbon media.

Testing will be done with a bench scale apparatus using air and water for humidity as the bulk gas. Carbon test beds shall be insulated such that the temperature drop across the beds does not exceed 1.0°C with dry hot air passing through the test beds at test temperatures. Heat tracing may also be used in combination with the insulation as a means to compensate for differences between size of the test apparatus and the WTP activated carbon units. If heaters are used, the minimum number of zone controls shall be 4 (1 for the guard and 1 for the primary activated carbon media sections in both the lead and lag adsorbers).

- 5.1 Test 1 - Measure mercury and allyl alcohol/naphthalene removal efficiencies, using a simulated HLW offgas.

A. Test conditions:

- Sorbent - Donau Kombisorb BAT-37 and ZA-37
- Residence time - by vendor, to match Mechanical Data Sheet
- Superficial gas velocity - by vendor, to Match Mechanical Data Sheet
- Inlet temperature - 94°C ± 0.5°C
- Mercury concentration - 52,600 µg/dscm ± 50 µg/dscm
- Relative humidity - 18.6 % ± 1%
- Gas composition:
 - a. Bulk gas - Air and water vapor
 - b. Concentrations of organics:

- i. Allyl alcohol – 1400 ppm \pm 20 ppm (dry)
 - ii. Naphthalene – 35 ppm \pm 1 ppm (dry)
- c. Other components (actual composition):
- i. CO₂ – 1.2% \pm 0.03%
 - ii. CO – 900 ppm \pm 20 ppm
 - iii. NO – 480 ppm \pm 10 ppm
 - iv. NO₂ – 370 ppm \pm 10 ppm
 - v. HF – 6.2 ppm \pm 0.2 ppm

B. Test duration:

- Initial period to condition the virgin sorbent with the test gases and to reach steady-state operations.
- 100 hours (continuous operation) or until breakthrough of mercury.

C. Data to be obtained:

- Measure Total Hydrocarbons at the outlet of the lead and lag adsorbers
- Measure inlet and outlet mercury concentrations for the lead and lag adsorbers.
- Measure mercury profile in the lead adsorber (guard and primary beds) at end of test.
- Measure inlet and outlet offgas temperatures for the lead and lag adsorbers.
- Measure sulfur content of three representative samples of virgin primary media and three representative samples of primary media taken after completion of testing from the location where maximum bed temperature was reached.
- Measure inlet and outlet allyl alcohol and naphthalene concentrations in the lead and lag adsorbers.
- Media temperature at two equally spaced locations along the centerline of the guard bed and primary bed for both the lead and lag adsorbers (total of 4 per adsorber).
- Time at which breakthrough occurs (if realized) for allyl alcohol and naphthalene for the lead and lag adsorbers.
- Limits established for step changes to NO_x and allyl alcohol concentrations (and any other limiting gas stream components determined by testing).

D. Calculations:

- Mercury removal efficiency and loading (mercury profile) for the lead and lag adsorbers.
- Estimated time for breakthrough of mercury for the lead and lag test adsorbers and for the WTP lead and lag adsorbers.
- Allyl alcohol and naphthalene removal efficiency and loading for the lead and lag adsorbers.
- Estimated time for breakthrough of allyl alcohol and naphthalene for the lead and lag adsorbers.
- Correlation of guard and primary bed temperatures and offgas constituents for the lead and lag adsorber.
- Analysis of the impact of key gas components on sorbent temperatures during conditioning and operational phases.

E. Performance:

- Mercury removal efficiency - 99.9%
- Carbon media temperature maintained below maximum allowable operating temperature for the media (130°C)

5.2 Test 2 - Measure mercury, hydrogen chloride, allyl alcohol, and naphthalene removal efficiencies using a simulated LAW offgas.

A. Test conditions.

- Sorbents – Donau Kombisorb BAT-37 and ZA-37
- Residence time – by vendor, to match Mechanical Data Sheet
- Superficial gas velocity – by vendor, to Match Mechanical Data Sheet
- Inlet temperature – 105°C ± 0.5°C (*Nominal Condition on Mechanical Data Sheet*)
- Mercury concentration - 24,000 µg/dscm ± 50 µg/dscm
 - i. Elemental mercury 85wt% ± 1 wt% Hg⁰
 - ii. Oxidized mercury 15wt% ± 1 wt% Hg⁺² (HgCl₂)
- Relative humidity – 10.2% ± 1% (*Nominal Condition on Mechanical Data Sheet*)
- Gas composition:
 - a. Bulk gas – Air and water vapor
 - b. Concentrations of organics:
 - i. Acetonitrile – 50 ppm ± 1.5 ppm
 - ii. Allyl alcohol – 100 ppm ± 3 ppm (dry)
 - iii. Naphthalene – 35 ppm ± 1 ppm (dry)
 - c. Inlet hydrogen chloride concentration - 46 ppm ± 1.5 ppm
 - d. Other components (actual composition):
 - i. Inlet CO concentration - 480 ppm ± 10 ppm
 - ii. Inlet NO concentration - 3800 ppm ± 50 ppm
 - iii. Inlet NO₂ concentration - 5600 ppm ± 50 ppm
 - iv. Inlet CO₂ concentration - 2% ± 0.5%v.
 - v. Inlet SO₂ concentration - 5.0 ppm ± 0.1 ppmB.

B. Test duration:

- Initial period to condition the virgin sorbent with the test gases and to reach steady-state operations.
- 100 hours (continuous operation) or until breakthrough of mercury.

C. Data to be obtained:

- Measure Total Hydrocarbons at the outlet of the lead and lag adsorbers
- Measure inlet and outlet mercury concentrations for the lead and lag adsorbers.
- Measure mercury profile in the lead adsorber (guard and primary beds) at end of test.
- Measure inlet and outlet hydrogen chloride concentrations of the lead and lag adsorbers.
- Measure inlet and outlet allyl alcohol and naphthalene concentrations of the lead and lag adsorbers.
- Measure inlet and outlet offgas temperatures of lead and lag adsorbers.
- Measure sulfur content of three representative samples of virgin primary media and three representative samples of primary media taken after completion of testing from the location where maximum bed temperature was reached.

- Media temperatures at two equally spaced locations along the centerline of the guard bed and primary bed for both the lead and lag adsorbers (total of 4 per adsorber).
- Time at which breakthrough occurs (if realized) for allyl alcohol and naphthalene for the lead and lag adsorbers.
- Limits established for step changes to NO_x and allyl alcohol concentrations (and any other limiting gas stream components determined by testing).

D. Calculations:

- Mercury removal efficiency and loading (mercury profile) for the lead and lag adsorbers.
- Estimated time for breakthrough of mercury for the lead and lag test adsorbers and for the WTP lead and lag adsorbers.
- Hydrogen chloride removal efficiency and loading for the lead and lag adsorbers.
- Estimated time for breakthrough of hydrogen chloride for the lead and lag test adsorbers and for the WTP lead and lag adsorbers.
- Allyl alcohol and naphthalene removal efficiency and loading for the lead and lag adsorbers.
- Estimated time for breakthrough of allyl alcohol and naphthalene for the lead and lag adsorbers.
- Correlation of guard and primary bed temperatures and offgas constituents for the lead and lag adsorbers.
- Analysis of the impact of key gas components on sorbent temperatures during conditioning and operational phases.

E. Performance:

- Mercury removal efficiency - 99.8%
- Hydrogen chloride removal efficiency - 97%
- Carbon media temperature maintained below maximum allowable operating temperature for the media (130°C)

6.0 Success Criteria

1. Quantization of the removal efficiencies required offgas constituents.
2. Quantization of load profiles for required offgas constituents and determination of WTP bed life.
3. Quantization of carbon media temperature and controls to maintain carbon media below the maximum allowable operating temperature for the activated carbon media of 130°C.

Note that it is possible that the specified test conditions may result in activated carbon media temperatures that do not satisfy the success criteria. In that event, the testing will continue at the reduced allyl alcohol rate that is required to satisfy the success criteria. Because the reduced rate may not satisfy project needs, additional scope for addition of an optional testing may be required to be performed as follows:

Optional Test:

- Retest with the lead bed only on-line to demonstrate the maximum allyl alcohol and naphthalene rates that satisfy the success criteria.

Appendix D

WTP Specific Tailoring of ASME AG-1-1997

Appendix D

WTP Specific Tailoring of ASME AG-1-1997

River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5a

Appendix C: Implementing Standards

35.0 ASME AG-1, Code on Nuclear Air and Gas Treatment

Revision: 1997 (R2000)

Sponsoring Organization: The American Society of Mechanical Engineers

WTP Specific Tailoring

The following tailoring of ASME AG-1 is required for use by the RPP-WTP project as an implementing standard for the use of Important-to-Safety (ITS) radial HEPA filter systems and the use of ITS axial flow HEPA filters as inbleed units in the Laboratory CSV Exhaust System. Where not specifically identified herein, the remainder of the code requirements are invoked.

Section FK is added as an addendum to ASME AG-1-1997 with the ASME AG-1a-2000 Addenda AG-1 edition invoked on the project.

In addition to the above tailoring for HEPA filter systems, ASME AG-1 is tailored to add ISO 1940-1:2003, Mechanical Vibration - Balance Quality Requirements For Rotors in A Constant (Rigid) State - Part 1: Specification And Verification Of Balance Tolerances, for balancing multi-stage blowers.

Page 228.9; Article HA-2000 Reference Documents

Revise Article HA-2000 as follows:

Change the code edition of ASME N509 as applied as a referenced (daughter) standard to AG-1 from 1989, reaffirmed December 6, 1996 to 2002.

Justification: The version of the ASME N509 Standard currently referenced as a daughter by AG-1 was issued in 1989 and Reaffirmed in 1996. At the time the N509-1989 (R1996) code was selected to be a daughter of AG-1, the ASME AG-1 code did not include requirements for HEPA filter housings. These requirements were later added in the 2000 Addenda to the AG-1 code. The ASME N509-2002 edition does not provide component requirements for HEPA filter housings and HEPA filters but instead refers the user to AG-1 for this information. Therefore, by making this change it will reduce potential redundancies and conflicts.

Page 228.16; Subsubarticle HA-4420 Access Doors and Panels

Revise Subsubarticle HA-4420 as follows for remote change housings:

4/29/08 7:45 AM

C.35-1

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5a**

Appendix C: Implementing Standards

Not applicable. The requirements of this article are not applicable to Remote Change Radial HEPA Filter Housings; the access doors and panels shall satisfy HA-4500, Pressure Boundary Leakage, and HA-5300, Pressure Boundary Leakage Testing.

Justification: Remote housings are not designed to "incorporate a means for adjusting compression forces, gasket compression..." There are not hinges or latches in the design and they are not designed for manual operation. Therefore, the requirements described in this code article are not applicable.

The remote housing design requires remote access, using a grapple to manipulate doors in a cave environment that may become subject to contamination and high radiation fields. The design incorporates low maintenance features not subject to failure (i.e., vertical housings and heavy doors). The housing doors seal by virtue of their weight alone. Door guides are included. A bar placed across the tops of the doors (and pinned in position) is used to ensure the doors remain in place during seismic events.

Page 228.18; Paragraph HA-4443 Clamping Mechanism

Revise Paragraph HA-4443 as follows for remote change and safe change radial HEPA housings:

Replace the text with: The requirements of this article are not applicable to Safe Change and Remote Change Radial HEPA Filter Housings. For Safe Change and Remote Change Radial HEPA filter housings, the design shall ensure that the housing knife-edge is embedded into the pliable filter sealant and will provide a seal for the complete perimeter of each filter.

Justification: The remote change housings are not side access housings and are not designed for manual operation. There are no clamping mechanisms or filter indexing mechanisms. The weight of the remote filter and differential pressure across the filter is relied upon to ensure that the knife-edge is embedded into the fluid seal.

The safe change housings are front access and are not walk-in style. The filter is not accessed from its side. Therefore, filter retrieval features and filter indexing mechanisms do not apply. A clamping mechanism that is capable of moving the filter (e.g., for side access housings) is not required. The safe change housings are designed to allow a person to insert and remove each filter.

Subarticle FK-4100 General Design

Revise second paragraph of Subarticle FK-4100 as follows for remote change and safe change radial HEPA filter designs:

Replace the text with: For Remote Change and Safe Change Radial HEPA Filters, the total media area provided within the filter pack shall be such that maximum media velocity is 6.5 ft/min (2.0 m/min) at the rated flow.

4/9/2008 7:45 AM

C.35-2

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5a**

Appendix C: Implementing Standards

Justification: The RPP-WTP radial filter design is based upon a UK Atomic Energy Standard Specification AESS 30/95100. This Standard contains an equivalent requirement to that found in AG-1. It states: "The effective area of filter medium used for each insert shall be not less than 3.0 sq m for every 100 l/s rated airflow." The Project proposes to meet this criterion. Converting these metric units for a UK 950 l/s (~2,000 cfm) rated filter equates to approximately 6.5 ft²/min media velocity or a minimum of 308 sq. ft. of media.

The DOE Nuclear Air Cleaning Handbook (Reference DOE-HDBK-1169-2003 Chapter 2.3.7 and Figure 2.8(a)) illustrates the importance and intent behind this code requirement. AG-1 Subsubarticle FK-1130 states that a HEPA filter shall have "a minimum efficiency of 99.97% (that is, a maximum particle penetration of 0.03%) for 0.3 micrometer diameter test aerosol particles." This defines the minimum performance of a HEPA type filter. The curves depicted in Figure 2.8(a) of the Handbook show that at 10.5 ft/min air velocity, the 0.3-micron particle size can be expected to penetrate a HEPA filter such that the AG-1 FK-1130 performance requirement would not be met.

Numerous aerosol penetration tests have been performed on the proposed filter design both inside prototype housings and on individual prototype radial filters designed with a media area of 236 sq. ft., or approximately 8.5 ft²/min media velocity. Each test demonstrated that a filter design with media velocities of this magnitude would meet the qualification performance requirements as stated in AG-1 (e.g., 99.97% efficiency or better for penetration of 0.3-micron particles).

The proposed RPP-WTP design uses a filter with approximately 325 sq. ft. of effective media area, or a media velocity of approximately 6.1 ft²/min. This represents a small improvement on the UK design and therefore continues to meet the UK Standard requirement.

Further addition of filter media to meet the more restrictive AG-1 Section FK requirement would possibly result in other undesirable design and performance characteristics (e.g., increased DP, reduced pleat spacing). The filter geometry is also limited by many other design restrictions including: available building space, personnel filter handling limitations, and waste disposal package limitations.

Table FK-4000-1

Revise Table FK-4000-1 rating information for the 2,000 acfm filter as follows for remote change and safe change HEPA radial filter designs:

**TABLE FK-4000-1 (TAILORED)
TYPE 1 RADIAL FLOW HEPA FILTER - NOMINAL RATINGS**

Maximum Rated Air Flow		Maximum Resistance	
(acfm)	(m ³ /hr)	Inches WC	Pa
40	68	1.3	325

4/9/2008 7:45 AM

C.35-3

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02 , Rev 5a**

Appendix C: Implementing Standards

Maximum Rated Air Flow		Maximum Resistance	
(acfm)	(m ³ /hr)	Inches WC	Pa
100	170	1.3	325
250	425	1.3	325
500	850	1.3	325
1000	1700	1.3	325
1500	2550	1.3	325
2000	3400	1.6	400

Justification: A new filter design is being developed with the intent of qualifying it in accordance with the AG-1 code. The RPP-WTP radial flow HEPA filter design originated from UK Atomic Energy Standard Specification AESS 30/95100. The radial flow HEPA filters will be designed for a maximum initial pressure drop of approximately 1.55 inches WC at a rated flow of 2,000 cfm. This is just slightly greater than (~ delta of 0.15 inches WC) the acceptance criterion stated in UK Atomic Energy Standard Specification AESS 30/95100. This increase in observed pressure drop is primarily due to small design differences between the UK design and the design proposed for use in the RPP-WTP. These differences include increases in filter pack depth, increases in faceguard to media pack gaps (used to enhance protection of the media), and space to accommodate the filters gel seal channel. The UK filter pack depth is approximately 68mm or ~2.7 inches. The RPP-WTP filters are available in 1-inch increment pack depths with a 3-inch pack depth proposed for use on the RPP-WTP. The slightly deeper RPP-WTP media pack design will increase the filter media area and increase the removal efficiency for small particles. The benefits gained in the RPP-WTP radial filter design are viewed to outweigh the negligible increase in airflow resistance (~ 3 to 5% of typical filter loading at change-out of filter element).

Paragraph FK-6211 Flatness and Squareness

Revise Paragraph FK-6211 (a) as follows for remote change and safe change radial HEPA filter designs:

Type I filter flange and end cap tolerances shall meet the following criteria: parallel within 1/8 in., flat within 1/16 in.

Justification: TAILORING OF PARALLELISM TOLERANCE: The tailoring presented above changes the code requirement for flange to end cap parallelism from 1/16 in. to 1/8 in. For the Remote Change Filter, the inlet flange, which includes the gel channel with a nominal width of 3/4 in., creates the seal and supports the filter inside the housing. The outlet end cap is fully suspended inside the housing by the opposite inlet flange (i.e., outlet end cap does not touch the housing and is not used to form the seal).

4/9/2008 7:45 AM

C.35-4

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5a**

Appendix C: Implementing Standards

Parallelism to within 1/8 in. will ensure that an adequate housing-to-filter seal is created. For the Safe Change Filter, as with the remote filter, the seal is formed by insertion of a housing knife-edge into a filter gel filled channel with a nominal width of 3/4 in. The gel channel is located on the filter inlet flange. Parallelism to within 1/8 in. will ensure an adequate housing-to-filter seal is created.

TAILORING OF SQUARENESS TOLERANCE: The "squareness" tolerance from FK-6211 is being addressed with a tolerance for circular runout as stated in tailoring for FK-6212. Circular runout controls the cumulative variations that may be present in the positional relationship between the inlet flange and outlet end cap. Inspection for circular runout is equivalent to and meets the code requirement to maintain the squareness characteristic while taking into account the entire length of the filter. Maintaining radial filter circular runout to within the 3/32" tolerance will ensure the filter forms an adequate seal within the filter housing.

Paragraph FK-6212 Overall Dimensions

Replace Paragraph FK-6212 as follows for the remote change and safe change radial HEPA filter design: Type 1 filter length shall be $(+0 / -1/8 \text{ in.})$, circular runout of filter flange with respect to the filter end cap shall be within 3/32 in., all other dimensions $\pm 1/16 \text{ in.}$

Justification: "Seal ring" and "seal face" are terms specific to Section FK radial filters with gaskets and therefore dimensions and tolerances associated with these terms are not applicable to the Type 1 gel seal radial filters to be used at the RPP-WTP.

TAILORING OF CONCENTRICITY: Concentricity is the condition in which the axes of all cross-sectional elements of a surface of revolution are common to the axis of a datum feature. Concentricity is being replaced with a tolerance for circular runout as a more practical method to verify roundness. Runout refers to the result of rotating a part about its central axis while measuring with a dial indicator its surface deviation from perfect roundness. With circular runout, the dial indicator is not moved along the direction of the axis of the part (as with "total runout"). Circular runout is therefore applied independently at each single circular element along the length of the part as the part is rotated through 360 degrees. The tolerance for circular runout provided in the tailored text controls the cumulative variations that may be present in the positional relationship between the inlet flange and outlet end cap. The 3/32 in. tolerance provided for circular runout will ensure the filter forms an adequate seal within the filter housing.

TAILORING OF GENERAL DESIGN TOLERANCE OF +/- 1/16 IN.: REPLACE: "all other dimensions +/- 1/16 in." **WITH:** "all other dimensions +/- 1/16 in. with exception that design filter media to faceguard gap shall be +/- 1/8 in. (i.e., to maintain a minimum media to faceguard gap of 1/8").

Justification: The proposed design is verified to be safe through code required filter qualification testing as described in Section FK-5100.

Section FG Mounting Frames

Not Applicable.

4/9/2008 7:45 AM

C.35-5

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5a**

Appendix C: Implementing Standards

Justification: The ASME Committee on Nuclear Air and Gas Treatment (CONAGT) has stated that Section FG only applies to walk in housings. None of the filter housings (i.e., radial or axial filter designs) to be installed on the RPP-WTP Project is a "walk in" design. Reference ASME Technical Interpretation File # 05-990, RPP-WTP CCN # 107935).

Page 607; Paragraph TA-4632 Airflow Distribution Test (AD)

Revise Paragraph TA-4632 as follows for remote change and safe change radial HEPA housings:

Replace "downstream" with "upstream". Add for clarity: "For Remote Change and Safe Change Radial HEPA filter banks, flow measurement location is upstream vs. code required downstream."

Justification: The requirement for flow measurements to be taken downstream of each HEPA filter in a bank is in order to verify equal flow distribution between filters in a bank. In traditional axial flow systems, a measurement location downstream is preferred due to the improvements in the flow conditions (i.e., flow straightening) inside the housing created by the filter itself. However, due to the difference in configuration created by the radial filter, the flow profile both entering and exiting the filter is extremely complex (i.e., not uniform over the filter face). Testing and analysis (computational fluid dynamic models) performed on prototype units to date have determined that taking the flow measurement upstream and inside the filter (inlet) using a hot wire anemometer provides the most repeatable measurement. Accuracy of the measurement is still hindered by flow conditions and anemometer placement; however, increased precision is obtained by taking an average of multiple measurements at multiple locations within each filter inlet. Predicted results from CFD modeling have agreed with actual field measurements using this technique. The project intends to design (based on the prototype tests) and use an anemometer instrument developed specifically for the radial filter design and place it at the inlet (i.e., upstream) side of the filter. Verification, in the field, of acceptable air distribution between filters in a bank can then be accomplished, as the code requires.

Page 607; Paragraph TA-4633 Air-Aerosol Mixing Test (AA)

Revise Paragraph TA-4633 as follows for axial housings used as LAB CSV Inbleeds:

This article is not applicable to LAB CSV inbleed axial filter housings.

Justification: The intent of this test is to verify that the test aerosol is uniformly mixed in the air stream when it reaches the filter in order to verify that each filter in a filter bank is being challenged. This test is concerned primarily with designs and layouts where a single point injection of aerosol in close proximity to the filter bank may result in non-uniform distribution of the test agent.

The Laboratory Facility CSV Inbleed housing is designed such that each filter is assigned its own aerosol injection manifold. The manifold design and its proximity to the filters have been qualified to meet the aerosol mixing test criteria presented in AG-1. The housing is not designed to accommodate the air-aerosol mixing field-commissioning test per TA-4633. However, the housing design is not being

4/9/2008 7:45 AM

C.35-6

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02 , Rev 5a**

Appendix C: Implementing Standards

modified for RPP-WTP use and aerosol mixing, by virtue of the manufacturer test sections, will not be impacted by the installation in the RPP-WTP Laboratory Facility.

Page 111; Section BA-4162 Vibration, Centrifugal Fans

Supplement Section BA-4162 as follows for balancing multi-stage blowers:

Since Section BA-4162 of ASME AG-1 is not applicable for multi-stage blowers used in ventilation/offgas systems, multi-stage blowers shall be balanced to Quality Grade 2.5 of ISO 1940-1:2003, Mechanical Vibration - Balance Quality Requirements For Rotors in A Constant (Rigid) State - Part 1: Specification And Verification Of Balance Tolerances.

Justification: ASME AG-1 is not applicable for multi-stage blowers. ASME AG-1 Section GC is applicable to multi-stage blowers. However, Section GC is in the course of preparation and is not available for use at this time.

4/9/2008 7:45 AM

C.35-7

Appendix E

WTP Specific Tailoring of ASME B31.3-1996

Appendix E

WTP Specific Tailoring of ASME B31.3-1996

River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5b

Appendix C: Implementing Standards

26.0 ASME B31.3-1996, Process Piping

Revision: 1996

Sponsoring Organization: ASME

WTP Specific Tailoring

The following tailoring of ASME B31.3, *Process Piping*, is required for use by the WTP contractor as an Implementing Standard for: (1) the fabrication and installation of those portions of the CSV ductwork that are being embedded in concrete, (2) the use of ASME B16.9 welding tees in accordance with ASME B31.3-2002, (3) use of vacuum box leak testing, and (4) the ASME B31.3-1998, paragraph 345.2.3(c), allowance for not leak testing closure welds outside of inaccessible areas.

- The tailored sections of ASME B31.3 applicable to embedded ductwork will only be utilized to the extent that it will cover the fabrication, installation, and inspection (and associated testing) of Category D fluid service piping being used as C5 ductwork. Air testing requirements for this ductwork will be compliant with ASME AG-1. Below is a description of those portions of ASME B31.3 that apply to fabrication, installation, and inspection of Category D fluid service piping and the sections of the SRD that they will apply to.
- The tailored sections of ASME B31.3 applicable to welding tees will only be used for ASME B16.9 welding tees. As long as the stress intensification factors from ASME B31.3-2002 are used in the stress analysis for the welding tees, welding tees fabricated to either the 1996 or the 2002 edition of ASME B31.3 can be used. Below is a description of those portions of ASME B31.3, Appendix D, Table D300, that apply to welding tees and the section of the SRD to which they will apply.
- The tailored paragraphs of ASME B31.3 applicable to vacuum box leak testing, in lieu of hydrostatic or pneumatic leak testing, will only be used to leak test full penetration circumferential piping field butt welds inside an inaccessible area (as defined in Appendix H, Section 6.0) out to the first isolation component outside the inaccessible area. Further, if the 100 % volumetric inspection using ultrasonic examination per ASME B31.3 paragraph 344.6, is conducted for welds to be vacuum box tested, then the ultrasonic examination shall be conducted using a method that creates and maintains a reproducible computerized image(s) of the entire weld in the axial and radial direction.
- The tailored paragraphs of ASME B31.3 adopting the provisions of ASME B31.3 (c) - 1998 Addendum paragraph 345.2.3(c) are applicable to all ASME B31.3 piping in all facilities except for closure welds in inaccessible areas.

Piping providing a confinement function in accordance with SRD 4.4-3 will comply with the following sections of ASME B31.3-1996, *Process Piping*. These sections of ASME B31.3 are applicable for embedded ductwork.

Chapter 3, Materials
Chapter 5, Fabrication

7/12/2008 10:58 AM

C.26-1

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5b**

Appendix C: Implementing Standards

Table 341.3.2, Visual acceptance criteria for Category D fluid service piping

Justification: Due to wall thickness requirements of duct embedded in concrete, piping materials are required. ASME B31.3 will apply to materials, fabrication, and inspection standards as appropriate. Testing requirements for nuclear air treatment systems will be consistent with ASME AG-1.

Piping providing a confinement function in accordance with SRD 5.1-2 will comply with the following sections of ASME B31.3-1996, *Process Piping*. These sections of ASME B31.3 are applicable for embedded ductwork.

Chapter 3, Materials

Chapter 5, Fabrication

Table 341.3.2, Visual acceptance criteria for Category D fluid service piping

Justification: Due to wall thickness requirements of duct embedded in concrete, piping materials are required. ASME B31.3 will apply to materials, fabrication, and inspection standards as appropriate. Testing requirements for nuclear air treatment systems will be consistent with ASME AG-1.

Piping providing a confinement function in accordance with SRD 4.2-2 will comply with ASME B31.3-1996, *Process Piping*, with the following modification:

In Table D300, the description of welding tee per ASME B16.9 shall be revised so it is consistent with that shown in Table D300 of ASME B31.3-2002:

Description	Flexibility Factor k	Stress Intensification Factor [Notes (2), (3)]		Flexibility Characteristic, h	Sketch
		Out-of-Plane, i_o	In-Plane i_i		
Welded tee per ASME B16.9 [Notes (2), (4), (6), (11), (13)]	1	$\frac{0.9}{h^{2/3}}$	$3/4 i_o + 1/4$	$3.1 \frac{T}{r_2}$	Same as ASME B31.3-1996

This means that for welding tees per ASME B16.9, note 11 in Table D300 is also changed to:

(11) If $r_2 \geq 1/8D_o$ and $T_c \geq 1.5T$, a flexibility characteristic of $4.4 \frac{T}{r_2}$ may be used.

7/12/08 10:25 AM

C.26-2

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5b**

Appendix C: Implementing Standards

Justification: The use of a lower flexibility characteristic for welding tees per ASME B.16.9 in accordance with ASME B31.3-2002 will increase both the out-of-plane and in-plane stress intensification factors. The increased stress intensification factors will reduce the allowable out-of-plane and in-plane moments that can be applied to the welding tee and keep the calculated stress below the stresses allowable by ASME B31.3-1996.

Important to Safety piping within the scope of SRD 4.2-2 shall comply with ASME B31.3-1996, Chapter V, Paragraph 345, using the following approach for vacuum box leak testing. Vacuum box leak testing, in lieu of hydrostatic or pneumatic leak testing, may be used to leak test full penetration circumferential piping, field butt welds inside an inaccessible area (as defined in Appendix H, Section 6.0) out to the first isolation component outside the inaccessible area, only under the following conditions:

Vacuum Box Leak Test Method - The vacuum box leak test shall be in accordance with a Bubble Test - Vacuum Box Technique method specified in ASME BPV Code, Section V, Article 10, Appendix II, subject to the requirements listed below:

- (a) Sensitivity of the test shall be demonstrated to be not less than $1E-3$ atm-ml/sec at 15 psig.
- (b) The test pressure shall be a partial vacuum of at least 7 psi below atmosphere, applied to the outside of the weld.
- (c) The required partial vacuum shall be maintained for at least 20 sec examination time.

In addition, the following limitations and restrictions shall apply to the application of vacuum box leak testing in lieu of a hydrostatic or a pneumatic leak test:

- Vacuum box leak testing will only be used to leak test circumferential piping field welds inside an inaccessible area (as defined in Appendix H, Section 6.0). This includes any welds in extensions of piping systems contained or originating in accessible areas between the inaccessible area boundary and the first isolation valve or device beyond the inaccessible area boundary;
- It shall only be used for piping field welds where required to avoid damage to components, ensure the safety to construction workers, perform leak tests of field welds where physical limitations prevent hydrostatic or pneumatic leak testing as prescribed in ASME B31.3-1996 paragraph 345.4 and paragraph 345.5 respectively;
- Pipe welds that are to be vacuum box leak tested will be assessed for suitability. The number of welds to be vacuum box leak tested shall be limited to a maximum of three welds between termination points (two termination or closure welds and one intermediate weld) on a given pipe system except where physical limitations prevent examination by hydrostatic or pneumatic leak testing. DOE will be informed of such exceptions, and may at its discretion and within 48 hours of being informed, respond to BNI on the suitability of the use of vacuum box leak testing for such instances. Termination points may be tanks, vessels, valves, etc. (Specifically excluded from the definition of termination points are junctions where the piping changes design class). This could be either the last two closure welds in an inaccessible area or the last closure weld in the inaccessible area and the last closure weld outside the

7/1/2008 10:05 AM

C.26-3

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5b**

Appendix C: Implementing Standards

inaccessible area. In addition, vacuum box leak testing would be permitted for the connection welds between construction modules if this is limited to one module-to-module weld per piping run within the cells. This is in addition to termination welds on the piping run. A module is defined as a pre-leak-tested subassembly containing multiple pipe spools;

- Vacuum box leak testing shall be limited to full penetration girth butt welds, on straight pipe or between straight pipe and pipe components of the same nominal pipe size and same wall thickness on both sides of the weld at the weld location. The following configurations are candidates for vacuum box testing:
 - (a) Straight pipe to straight pipe connection butt welds
 - (b) Straight pipe to 90° elbow connection butt welds
 - (c) Straight pipe to 45° elbow connection butt welds
 - (d) Straight pipe to concentric reducer connection butt welds
 - (e) Straight pipe to eccentric reducer connection butt welds
 - (f) Straight pipe to butt welding tee connection butt welds
 - (g) Straight pipe to butt welding reduced outlet tee connection butt welds
 - (h) Straight pipe to valve nozzle connection butt welds
 - (i) Straight pipe to tank or vessel nozzle connection welds
 - (j) Straight pipe to safe-end of a weldolet connection butt welds - full penetration butt welded connection only
 - (k) Straight pipe to pipe cap connection butt welds

Prior to the application of vacuum box testing using any of the candidate configurations on piping butt welds at the WTP, the Contractor must successfully demonstrate to the DOE, for the candidate configuration, that (1) all portions of the weld to be inspected are visible and can be inspected in accordance with the ASME Boiler and Pressure and Vessel Code, Section V, Article 10, Appendix II - 1995; (2) the vacuum box can adequately maintain a partial vacuum of 7 psid; and (3) vacuum box leak testing can be accomplished in the time limits and other requirements established by this procedure. The DOE shall be advised at least 7 days in advance of any demonstration to qualify a new weld configuration so that they can witness the demonstration. The Contractor shall document any demonstration relied upon to justify the use of vacuum box leak testing on a new configuration. Further, vacuum box leak testing shall be conducted with a vacuum box that completely encapsulates the weld, at the test location;

- All welds shall be 100 % volumetrically inspected in accordance with ASME B31.3-1996, paragraphs 344.5 or 344.6. If the 100 % volumetric inspection is conducted using ultrasonic examination per ASME B31.3-1996 paragraph 344.6, then the ultrasonic examination shall be conducted using a method that creates and maintains a reproducible computerized image(s) of the entire weld in the axial and radial direction;
- It shall be limited to welds made using the Orbital welding machines. The only exception is that vacuum leak box testing may be used on manual welds if the 100 % volumetric inspection was conducted by radiography per ASME B31.3-1996 paragraph 344.5;
- The piping systems and or components on both sides of the weld to be vacuum box leak tested shall have been subjected to a hydrostatic leak test in accordance with ASME B31.3-1996

7/12/02 10:05 AM

C.26-4

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5b**

Appendix C: Implementing Standards

paragraph 345.4, a pneumatic test in accordance with ASME B31.3-1996 paragraph 345.5, a combination pneumatic-hydrostatic leak test in accordance with ASME B31.3-1996 paragraph 345.6, or in the case of components, leak tested in accordance with the Code or Standard applicable to the design of the component;

- At a minimum, a flexibility analysis in accordance with ASME B31.3-1996 paragraphs 319.4.2 (a) and (b) shall be required on any piping systems that contain welds that are to be vacuum leak box tested. In addition, a comprehensive flexibility analysis in accordance with ASME B31.3-1996 paragraphs 319.4.2 (c) and (d) shall be performed on any piping systems that contain welds that are to be vacuum box leak tested when the piping systems have a design temperature greater than or equal to 150 °F;
- For manual welds, the requirements of ASME B31.3-1996 paragraph 344.7.1 (a) through (g) shall be invoked on any weld to be vacuum box leak tested with the exception that the requirement of subparagraph 344.7.1 (e) "... aided by liquid penetrant or magnetic particle examination when specified in the engineering design" shall not be required. For welds made using Orbital welding machines, the requirements of ASME B31.3-1996 paragraph 344.7.1 (a), (b), (c), (d), and (g) shall be invoked. The requirements of 344.7.1 (e) and (f) shall not be required. The implementation of these requirements shall be documented in the weld inspection report;
- Pipe welds and the associated line numbers that are to be vacuum leak box tested shall be identified in advance of the testing. This identification shall be documented in the controlled document Weld List, which must include this information prior to the initiation of any vacuum box leak testing associated with those welds and line numbers. It is understood that the controlled document Weld List may need to be revised and updated periodically through the construction phase of the WTP Project; and
- The following special requirements shall be placed on the training programs used to certify the technicians that will be conducting the vacuum box leak tests:
 1. The BNI Construction Manager shall pre-approve the technician qualifying examination(s) for vacuum box leak testing;
 2. The BNI Construction Manager shall pre-approve the qualifications of each Level III technician preparing or giving the examinations for vacuum box leak testing;
 3. DOE ORP at their discretion shall reserve the right to observe any and/or all practical leak test examinations and review of the results of any and/or all written vacuum box leak test examinations;
 4. The minimum topical content of each Level II examination shall be specified by BNI, and approved by DOE;
 5. The 80 % correct criteria for passing the examination shall apply to each part of the three-part examinations that are to be given;
 6. BNI shall provide reasonable assurance that they will take adequate measures to assure the integrity of written examination is maintained; and
 7. There shall be several versions of each examination in use to assure Level II knowledge and ability concerning vacuum box leak testing is confirmed.

7/1/2008 10:05 AM

C.26-5

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5b**

Appendix C: Implementing Standards

Justification: The requirement for the vacuum box leak test sensitivity is consistent with the ASME B31.3 requirement for a sensitive leak test as given in ASME B31.3-1996 paragraph 345.8 and for at least 7 psi vacuum and an examination time of at least 20 seconds. The limitations in using vacuum box leak testing better define when this method can be used. DOE-ORP may further change the definition and application of these special vacuum box leak testing criteria based on the Contractor's experience with their use, or the Contractor's request for a change.

Piping system closure welds outside of inaccessible areas (as defined in SRD Appendix H, Section 6.0) shall comply with the requirements of ASME B31.3-1998, subparagraph 345.2.3(c). When ASME B31.3-1998, subparagraph 345.2.3(c) is invoked the following restrictions shall apply:

- It shall not be invoked on any closure welds on piping systems in inaccessible areas as defined in Section 6.0 of Appendix H of the SRD. This includes any welds in extensions of piping systems contained or originating in inaccessible areas, between the inaccessible area boundary and the first isolation valve, or device beyond the inaccessible area boundary;
- It shall only be invoked on full penetration butt welds in straight pipe, full penetration butt welds at the safe-end of an equipment nozzle, or full penetration butt welds at the safe-end of branch connections. [The safe-end is defined as the piping to equipment nozzle connecting weld or the branch connection to branch piping connecting welds.];
- The requirements of ASME B31.3(c) - 1998, subparagraph 345.2.3 (c) shall be met;
- The piping systems and or components on both sides of the closure weld shall have been subjected to a hydrostatic leak test in accordance with ASME B31.3-1996 paragraph 345.4, a pneumatic leak test in accordance with ASME B31.3-1996 paragraph 345.5, a combination pneumatic-hydrostatic leak test in accordance with ASME B31.3-1996 paragraph 345.6, or in the case of components leak tested in accordance with the Code or Standard applicable to the design of the component;
- For manual welds, the requirements of ASME B31.3-1996 paragraph 344.7.1 (a) through (g) shall be invoked with the exception that the requirement of subparagraph 344.7.1 (e) "... aided by liquid penetrant or magnetic particle examination when specified in the engineering design" shall not be required. For welds made using the Orbital welding machines, the requirements of ASME B31.3 -1996 paragraph 344.7.1 (a), (b), (c), (d), and (g) shall be invoked. The implementation of these requirements shall be documented in the weld inspection report;
- Piping welds and the associated line numbers for which the closure weld classification is invoked shall be documented in a controlled document Weld List;
- Piping components may include mechanical elements other than piping; and
- In addition, BNI shall incorporate these requirements into the appropriate specification. DOE-ORP may further change the definition and application on the use of closure welds based on the Contractor's experience with their use or the Contractor's request for a change.

Justification: This change does not change the safety function of any pressure boundary components. The requirement to leak test pressure boundary field welds is primarily to ensure the reliability of the welds in addition to the reliability provided by the other required examinations. The exception allowed by ASME B31.3-1998, paragraph 345.2.3 that the final weld connecting piping systems or components which have been successfully tested in accordance with

7/12/08 10:55 AM

C.26-6

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5b**

Appendix C: Implementing Standards

paragraph 345 need not be leak tested provided the weld is examined in-process in accordance with paragraph 344.7 (a), (b), (c), (d), and (g) and passes with 100 % radiographic examination in accordance with paragraph 344.5 or 100 % ultrasonic examination in accordance with paragraph 344.6 provides adequate assurance that the weld is reliable and leak tight. The change continues to provide adequate safety since it requires that all piping closure welds that are not leak tested are in-process examined and 100 % volumetrically examined which exceeds the requirements of ASME B31.3-1996 for closure welds that are leak tested. The inability to hydrostatically or pneumatically leak test these closure welds does not affect the soundness of the welds.

7/12/2008 10:05 AM

C.26-7

Appendix F

WTP Specific Tailoring of AISC (ASD)

Appendix F

WTP Specific Tailoring of AISC (ASD)

River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5

Appendix C: Implementing Standards

AISC Manual of Steel Construction, Allowable Stress Design (ASD)

Revision: 9th Edition

Sponsoring Organization: American Institute of Steel Construction

WTP Specific Tailoring

The following tailoring of MOIGs is required for use by the WTP contractor as an implementing standard for design of structural steel for Seismic Category III SSCs.

No specific section

Load combinations for design of structural steel members utilize those identified in UBC 97, Section 1612.3

Justification: These load combinations represent the commercial requirements for allowable stress design of structural steel. Use of these load combinations will ensure compliance with the commercial design in accordance with the UBC.

No specific section

Seismic detailing requirements shall be in accordance with UBC 97, Chapter 22, Division V, Section 2214, for moderate seismic risk structures.

Justification: The requirements contained in this section contain accepted industry practice for design of important commercial steel structures. Use of this section will ensure compliance with the commercial design in accordance with the UBC.

24 22099 7 63 AM

C-9-1

Appendix G
WTP Specific Tailoring of ASME NQA-1-1989

Appendix G

WTP Specific Tailoring of ASME NQA-1-1989

River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 4k

Appendix C: Implementing Standards

C.37 ASME NQA-1-1989, Quality Assurance Program Requirements for Nuclear Facilities

Revision: 1989

Sponsoring Organization: The American Society of Mechanical Engineers

WTP Specific Tailoring

The following tailoring of ASME NQA-1-1989 is required for use by the WTP project as an implementing standard to perform Commercial Grade Dedication activities using ASME NQA-1-2004.

NQA-1-1989, Supplement S-1

Terms and Definitions

Replace the Commercial Grade Item definition with definition from NQA-1-2004, Part I, Section 400:

Commercial Grade Item: a safety class/safety significant structure, system, or component (SSC), or part thereof, that affects its safety function, that was not designed and manufactured in accordance with the requirements of this Standard.

Justification: By tailoring NQA-1-1989 to incorporate elements of NQA-1-2004, the Commercial Grade Item definition is broadened to reflect current industry practices related to Commercial Grade Dedication. Currently there are gaps among NQA-1 qualified suppliers and utilization of NQA-1-2004 will enable WTP to employ technically acceptable suppliers not available under the provision of NQA-1-1989. The NQA-1-1989 standard was established primarily to provide for the purchase of replacement parts for nuclear-related facilities and is not sufficient to support the purchase of commodities and equipment needed for a new facility.

Commercial Grade Items may be either off the shelf/catalog items or "engineered items", i.e., items for which some custom design effort is required by the supplier to meet purchaser requirements. If the critical characteristics of an "engineered item" cannot be verified solely based on material or performance attributes, verification of critical design characteristics should be based on NQA-1-2004, Section 704 (e.g., by design verification methods) or by application of alternate standards for qualification of suppliers of Safety Class/Safety Significant items.

NQA-1-1989, Supplement S-1

Terms and Definitions

Add to the reference section ASME NQA-1-1989, Supplement S-1, the following definitions from NQA-1-2004, Part I, Section 400:

Commercial Grade Service: a service that was not provided in accordance with the requirements of this standard.

10/9/2007 12:41 PM

C.37-1

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 4k**

Appendix C: Implementing Standards

Critical Characteristics: important design, material, and performance characteristics of a commercial grade item or service that, once verified, will provide reasonable assurance that the item or service will perform its intended safety function.

Dedication: an acceptance process performed in accordance with this Standard to provide reasonable assurance that a commercial grade item or service will successfully perform its intended safety function and, in this respect, is deemed equivalent to an item or services provided under the requirements of this Standard.

Dedicating Entity: the organization that performs the dedication process.

Justification: The tailoring of the NQA-1-1989, by adding definitions of Commercial Grade Service, Critical Characteristic, Dedication, Dedicating Entity, and Safety Function to NQA-1-2004, allows for the use of the Commercial Grade Dedication process to procure equipment requiring design services by the supplier. This incorporates definitions consistent with NQA-1-2004 text.

**NQA-1-1989, Supplement 7S-1
Purchased Items and Services**

Supplementary Requirements for Control of

Replace NQA-1-1989 supplement 7S-1 Section 10, Titled Commercial Grade Items in its entirety with NQA-1-2004, Requirement 7, Section 700.

Justification: NQA-1-2004 provides greater flexibility for implementing the Commercial Grade Dedication process while assuring that equipment acquired under these processes will support their safety functions.

Modify new Section 701 General as follows:

701 General

When Commercial Grade Items or Services are utilized, the dedicating entity can utilize the requirements of this section for procurement and acceptance of items or services as an acceptable alternative to Sections 2 through 9 of this Supplement, except that Supplier evaluation and selection, where determined necessary by the Purchaser, shall be in accordance with Section 3.1 of this Supplement. The applicable requirements of this Standard shall apply to dedication activities for acceptance.

When a Commercial Grade Item has been delivered or installed, prior to the decision to dedicate, the dedicating entity can utilize the requirements of this section for acceptance of the item when the critical characteristics can be verified solely by inspections, tests, or analyses.

Justification: Corrects the section numbers to correspond to the appropriate section of NQA-1-1989 and provides for use of Commercial Grade Dedication for delivered and/or installed SSCs whose safety classification is subsequently upgraded.

10/6/2007 12:41 PM

C.37-2

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 4k**

Appendix C: Implementing Standards

Modify (referenced section number only) new Section 704.2 Source Verification as follows:

704.2 Source Verification

Source verification is only applicable to the actual item(s) or service(s) that are verified at the Supplier's facility or other applicable location. Source verification shall be performed in accordance with Section 8.2.2 of this Supplement, including a checklist or plan with the documented evidence of the source verification furnished to the dedicating entity and shall include or address the following:

- (a) identification of the item(s) or service(s) included within the scope of the source verification
- (b) identification of the critical characteristics, including acceptance criteria, to be controlled by the Supplier
- (c) verification of the Supplier's processes and controls are effectively implemented for the identified critical characteristics
- (d) identification of the activities witnessed during the source verification and the results obtained
- (e) documentation of the adequacy of the Supplier's processes and controls.

Justification: Corrects the paragraph number to correspond to the appropriate section of NQA-1-1989.

10/6/2007 12:41 PM

C.37-3

Appendix H

WTP Specific Tailoring of IEEE Std. 384

Appendix H

WTP Specific Tailoring of IEEE Std. 384

River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590 WTP-SRD-ESH-01-01-02, Rev 5

Appendix C: Implementing Standards

19.0 IEEE-384, IEEE Standard Criteria for Independence of Class 1E Equipment and Circuits

Revision: 1992

Sponsoring Organization: The Institute of Electrical and Electronics Engineers, Inc.

RPP-WTP Specific Tailoring

The following tailoring of IEEE-384 is required for use by the RPP-WTP project as an implementing standard for SDC, SC, SDS, or SS electrical equipment and circuit design.

All Sections Clarification of Nuclear Power Generating Station Terminology

The term "Standby Generator" in the Standard is synonymous with "Emergency Generator" in the RPP-WTP.

Justification: As determined by the ISM review process, the Standby Generators on the RPP-WTP are not classified as SDC or SC while the Emergency Generators are classified as SDC or SC.

Section 20 Purpose

Replace with the following:

This standard establishes the criteria for implementation of the independence requirements of IEEE 603-1998 (as tailored in C.33) and IEEE 308-1991 (as tailored in C.18).

Justification: This section was revised to clarify that SRD implementing standards IEEE 603-1998 and IEEE 308-1991 are tailored in Appendix C.

Section 30 References

The following reference standards, do not apply for the RPP-WTP.

- [1] ANS/ANS-58.2-1988 Design Basis for Protection of Light Water Nuclear Power Plants Against the Effects of Postulated Pipe Rupture.

Justification: This document is applicable to the high pressure steam lines found in nuclear power generating stations and doesn't apply for the RPP-WTP.

- [4] ANS/NFPA 803-1988 Fire Protection for Light Water Nuclear Power Plants.

Justification: This document specifically addresses nuclear power generating stations. Per Section 4.5 of volume II of the SRD, the RPP-WTP will use NFPA 801-2003 as an implementing standard for fire protection.

3/12/2008 8:31 AM

C.19-1

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590 WTP-SRD-ESH-01-C01-C02, Rev 5**

Appendix C: Implementing Standards

- [11] IEEE Std 494-1974 (reaff 1990), IEEE Standard Method for Identification of Documents Related to Class 1E Equipment and Systems for Nuclear Power Generating Stations.

Justification: This standard has been **withdrawn** by the IEEE standards committee and no replacement standard has been recommended. This standard is not called out as an implementing standard in the SRD. Procedures for identification of documents related to SDC, SC, SDS, or SS equipment will be developed internally for the RPP-WTP project.

Replace the 1991 version of IEEE 603 with the following version:

IEEE Std ~~603-1998~~, *IEEE Standard Criteria for Safety Systems for Nuclear Power Generating Stations*.

Justification: SRD Safety Criterion 4.4.4 lists the 1998 version of IEEE 603 as an implementing standard for SDC and SC electrical power systems. The 1998 revision of IEEE 603 shall be used in place of the 1991 revision called out as a reference in the body of IEEE 384-1992 for SDC and SC electrical power systems only.

The following reference Standards shall be included:

- [16] DOE/RL-96-0006, Revision 1, *Top-Level Radiological, Nuclear, and Process Safety Standards and Principles for TWRS Privatization Contractors*.

Justification: Called out as a regulatory basis in the SRD.

- [17] ANSI/ISA-S84.01-1993, *Application of Safety Instrumented Systems for the Process Industries*.

Justification: Replaces IEEE 603 for Control and Instrumentation Systems at the WTP, per 24590-WTP-ABCN-ESH-01-027.

- [18] NFPA 801-2003, *Standard for Fire Protection for Facilities Handling Radioactive Materials*.

Justification: Called out as an implementing standard under safety criteria 4.5-1 through 4.5-4.

Section 4C Definitions

- The definition of **design basis events** shall be replaced with the following:

"Postulated events providing bounding conditions for establishing the performance requirements of structures, systems, and components that are necessary to: 1) ensure the integrity of the safety boundaries protecting the worker; 2) place and maintain the facility in a safe state indefinitely; or 3) prevent or mitigate the event consequences so that the radiological exposures to the general public or the workers would not exceed appropriate limits. The Design-Basis Events also establish the performance requirements of the structures, systems and components whose failure under Design-Basis Event conditions could adversely affect any of the above functions."

Justification: This definition is from DOE/RL-96-0006

3/12/2008 9:31 AM

C.19-2

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590 WTP-SRD-ESH-01-COI-02, Rev 5**

Appendix C: Implementing Standards

Section 5.3 Equipment and Circuits Requiring Independence

Replace with the following sentence:

Equipment and circuits requiring independence shall be determined during the ISM review cycle and shall be identified on documents and drawings in a distinctive manner.

Justification: The reference to IEEE-494 is not applicable since this standard has been withdrawn by the IEEE standards committee and no replacement standard has been recommended. This standard is not called out as an implementing standard in the SRD. The ISM process will provide reliability requirements for each control strategy. These reliability requirements determine when control strategies require independence, redundancy, and seismic qualifications.

Section 6.1.3.2 Area Boundaries

Replace the reference to NFPA 803 1988[4] with NFPA 801 2003[18].

Justification: Standard NFPA 803 1988 is not applicable for the RPP-WTP. Per Section 4.5 of the SRD, NFPA 801-2003 shall be used for the RPP-WTP.

Section 6.5 Containment Electrical Penetrations

Not applicable for the RPP-WTP.

Justification: Containment electrical penetration assemblies are unique to the containment structure of Nuclear Power Generating Stations and have no equivalent in the RPP-WTP project.

3/12/2009 8:31 AM

C.19-3

Appendix I

WTP Specific Tailoring of IEEE Std. 323

Appendix I

WTP Specific Tailoring of IEEE Std. 323

River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-C01-C2, Rev 5

Appendix C: Implementing Standards

23.0 IEEE-323, Qualifying Class 1E Equipment for Nuclear Power Generating Stations

Revision: 1983

Sponsoring Organization: The Institute of Electrical and Electronics Engineers, Inc.

RPP-WTP Specific Tailoring

The following tailoring of IEEE-323 is required for use by the RPP-WTP project as an implementing standard for ITS electrical and instrument system design.

Section 1.1, Scope

- This Standard applies to SSCs designated as SDC, SC, SDS, or SS (where the SS SSCs is required to perform a credited safety function in a harsh environment).

Justification: SS SSCs, which are required to perform a safety function in a harsh environment, have been included within the scope of this standard.

Section 2, References

The following reference Standard shall be included:

- [9] DOE/RL-96-0003 Revision 3, Top-level Radiological, Nuclear, and Process Safety Standards and Principles for the RPP Waste Treatment Plant Contractor.

Justification: The added references are applicable for the RPP-WTP project.

Section 3, Definitions

- Modify the definition of **harsh environment** to be: An environment expected as the result of the postulated service condition appropriate for the design basis event of the RPP-WTP. It is an environment that exceeds the conditions of a mild environment. Equipment that do not experience an environment beyond a mild environment during a design basis event can be considered to be in a mild environment.

Justification: A **harsh environment**, as defined by this standard, applies to a Nuclear Power Generating Station and are the result of a loss of cooling accident (LOCA) high energy line break (HEL.B) inside the containment and post-LOCA or HELB outside containment. The modified definition applies to RPP-WTP.

This modified definition is further supported by 10CFR 50.49, Environmental qualification of electric equipment important to safety for nuclear power plants, which states, in Section C: "Requirements for (1) dynamic and seismic qualification of electric equipment important to safety, (2) protection of electric equipment important to safety against other natural phenomena and external events, and (3) environmental qualification of electric equipment important to safety located in a mild environment are not included within the scope of this Section. A mild environment is an environment

3/12/2009 9:42 AM

C.23.1

**River Protection Project – Waste Treatment Plant
Safety Requirements Document Volume II
2450 WTP-SRD-ESH-01-001-02, Rev 5**

Appendix C: Implementing Standards

that would at no time be significantly more severe than the environment that would occur during normal plant operation, including anticipated operational occurrences.”

The definition of **mild environment** within the standard states:

“An environment expected as a result of normal service conditions and extremes (abnormal) in service conditions where seismic is the only design basis event (DBE) of consequences.”

Therefore the normal operating environment for a SSC is considered a “mild environment” by this definition.

The following definition is applicable for the RPP-WTP:

- The definition of **design basis events** shall be added with the definition from DOE/RL-98-0006 which states:

“Postulated events providing bounding conditions for establishing the performance requirements of structures, systems, and components that are necessary to: 1) ensure the integrity of the safety boundaries protecting the worker; 2) place and maintain the facility in a safe state indefinitely; or 3) prevent or mitigate the event consequences so that the radiological exposures to the general public or the workers would not exceed appropriate limits. The Design-Basis Events also establish the performance requirements of the structures, systems and components whose failure under Design-Basis Event conditions could adversely affect any of the above functions.”

Justification: The above listed definition was added to be applicable to the RPP-WTP project.

Section 7, Simulated Test Profiles

Delete this section.

Justification: This section is specific to Nuclear Power Generating Stations and describes profiles and margin for LOCA/HELB harsh environments.

3/3/2008 8:42 AM

C.23.2

Appendix J

WTP Specific Tailoring of IEEE Std. 344

**River Protection Project - Waste Treatment Plant
Safety Requirements Document Volume II
24590-WTP-SRD-ESH-01-001-02, Rev 5**

Appendix C: Implementing Standards

Justification: The definition of OBE and SSE are applicable to Nuclear Power Generating Stations and the new definitions is applicable to the RPP-WTP project as defined in the SRD. This is consistent with the tailoring of AISC NCGOs documented in ABCN-013.

Pages 1-43, All Sections Clarification of OBE and SSE

The term SSE in the standard is treated as a design basis earthquake. The requirement to apply and document the loads of a number of OBEs before an SSE is deleted from the standard.

Justification: The earthquake applicable to RPP-WTP is the design basis earthquake. The requirement to subject equipment to several OBEs prior to an SSE is not included in the requirements of the SRD for the RPP-WTP project. This is consistent with the tailoring of AISC NCGOs documented in ABCN-013.

Page 13, Section 7.1.3.2 Repairs

In the fifth line delete the words, ", such as LOCA,".

Justification: LOCA is a term specific to Nuclear Power Generating Stations and not to the RPP-WTP project.

Page 15, Section 7.1.5, Vibrational Aging

In the last paragraph change the first sentence to read, "The purpose of the vibrational aging is to show that the lower levels of normal and transient vibration associated with plant operation will not adversely affect an equipment's performance of its safety function nor cause any condition to exist that, if undetected, would cause failure of such performance during a subsequent design basis earthquake."

Justification: This sentence within the standard included additional vibration aging of an OBE, but used the terms "lower intensity earthquake" rather than OBE. The rewording is needed to clarify the meaning of the sentence. The requirement to subject equipment to several OBEs prior to an SSE is not included in the requirements of the SRD for the RPP-WTP project. The earthquake applicable to RPP-WTP is the design basis earthquake. This is consistent with the tailoring of AISC NCGOs documented in ABCN-013.

Page 16, Section 7.1.6.1, Hydrodynamic Loads

Delete the words, "and the loss-of-coolant accident (LOCA)"

Justification: LOCA is a term specific to Nuclear Power Generating Stations and not to the RPP-WTP project.

3/12/2008 8:39 AM

C.22.2