
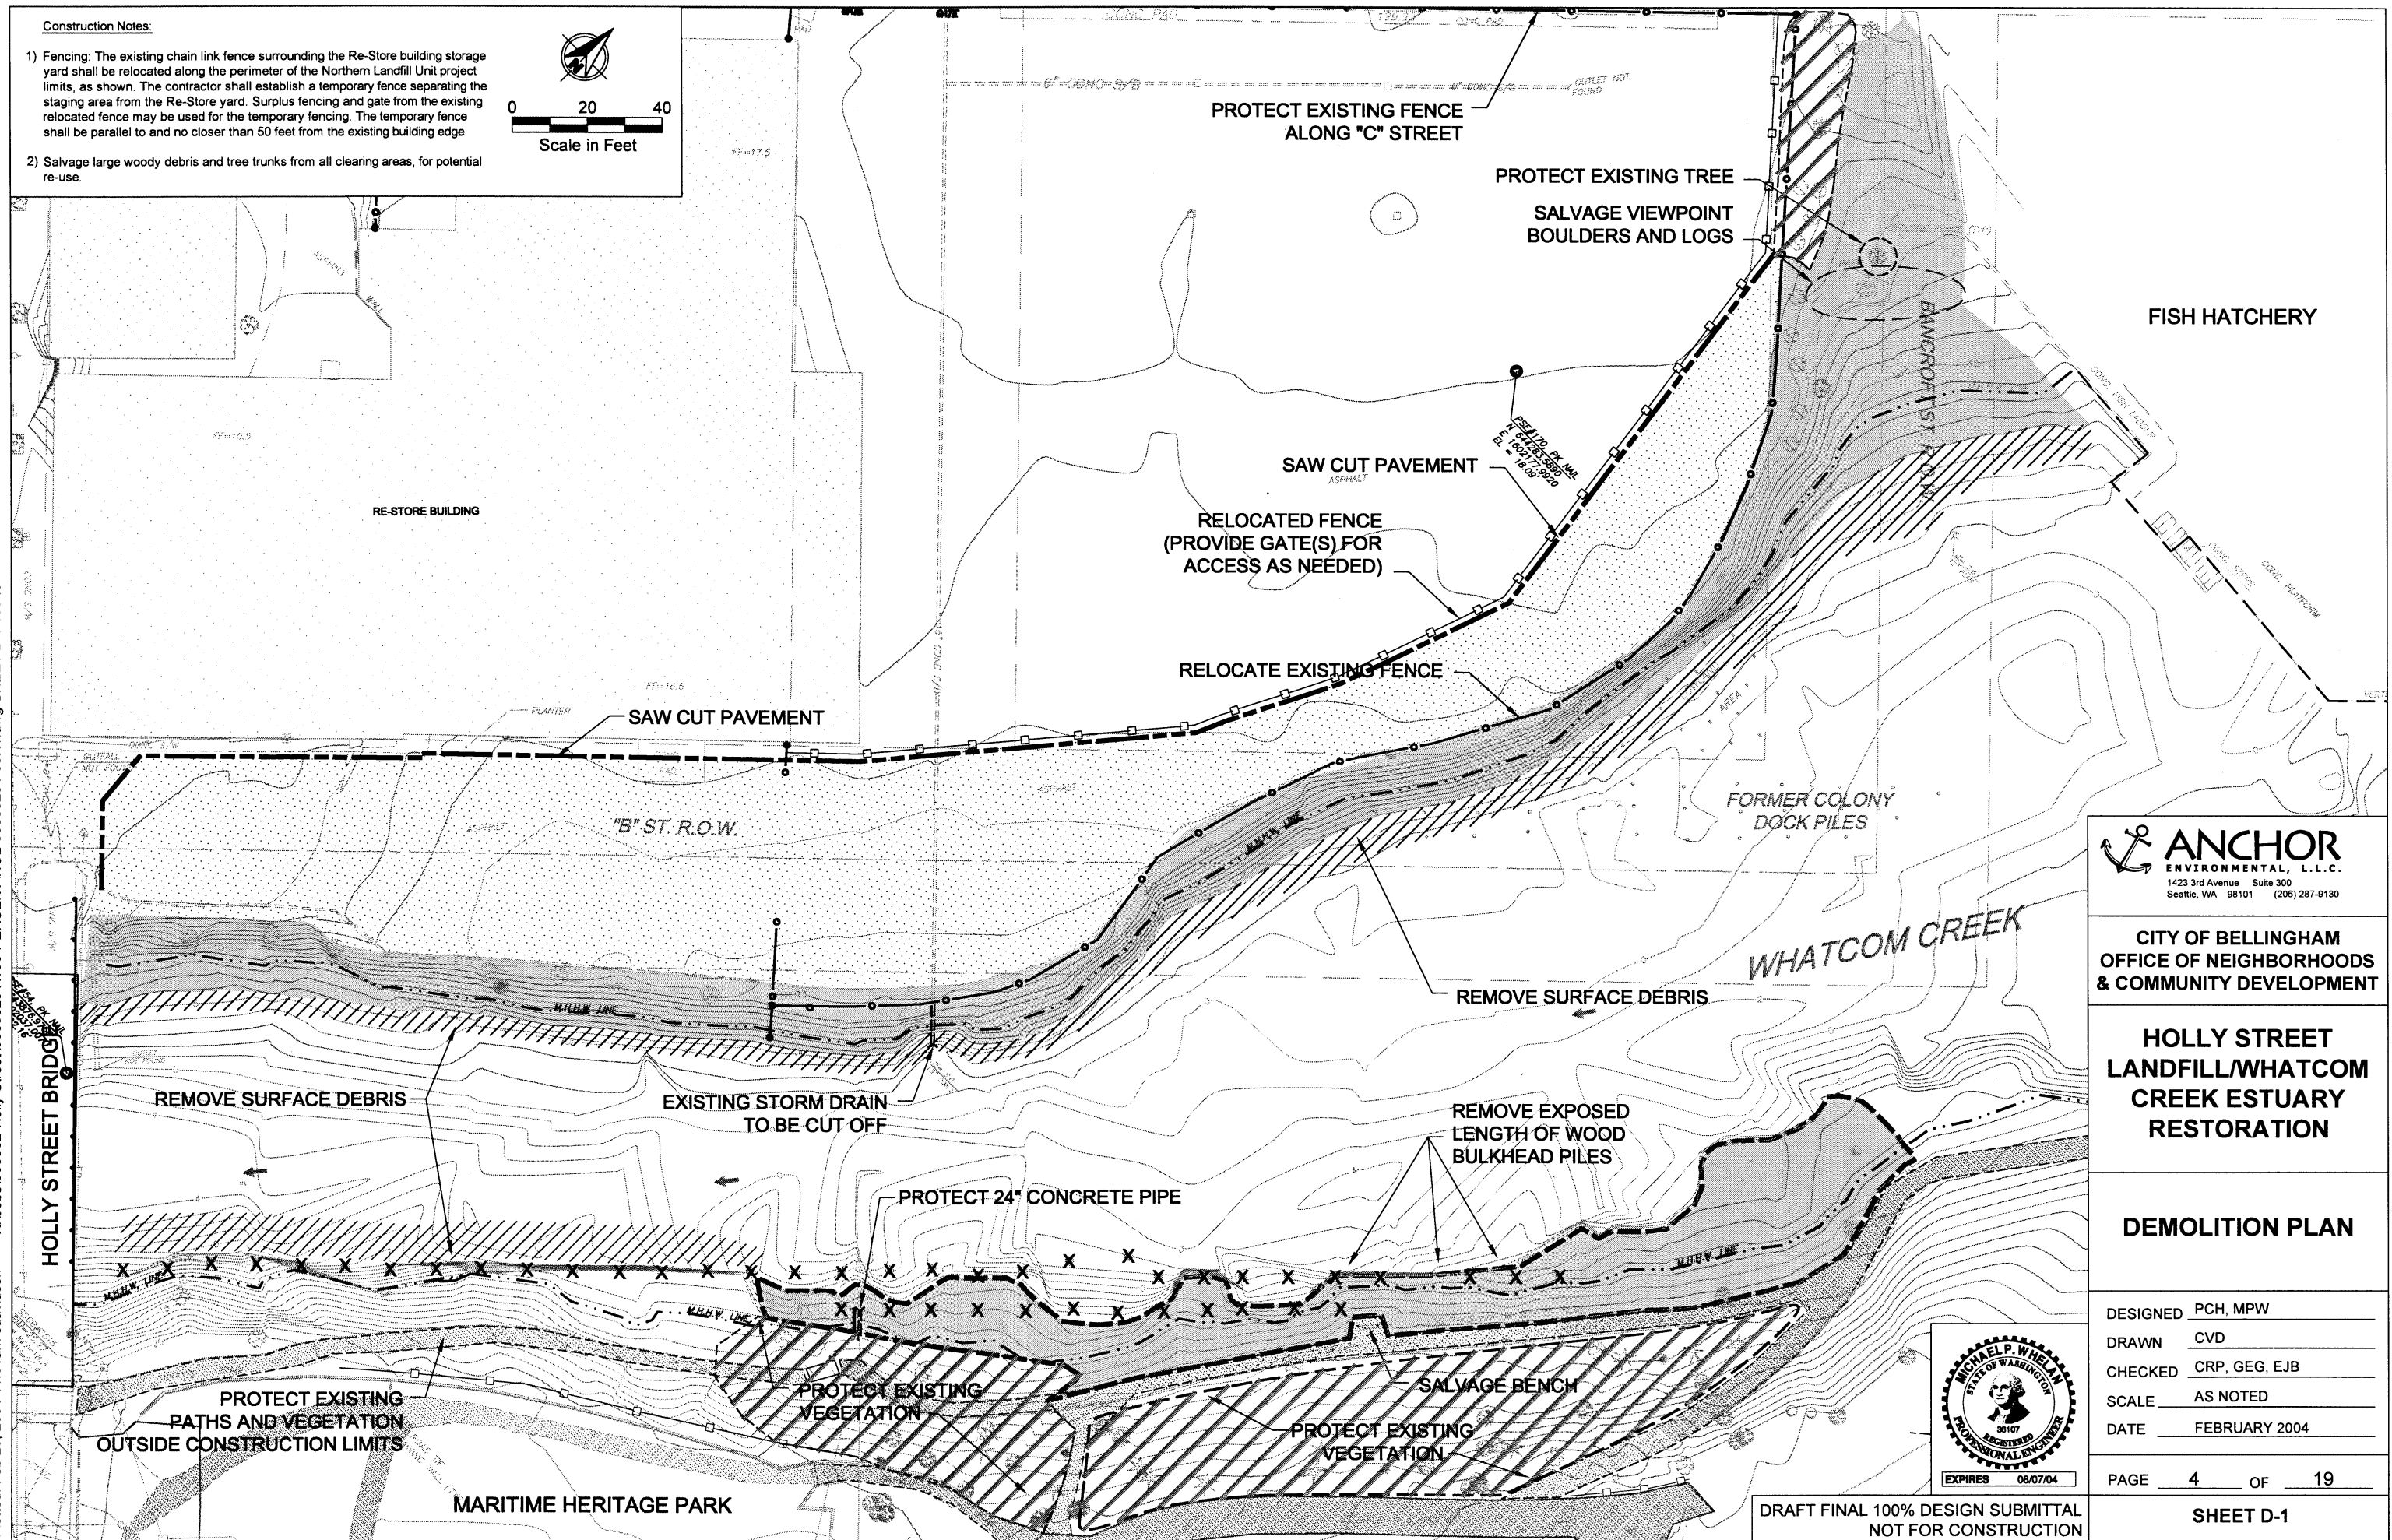


Plotted: Feb 25, 2004 11:51am cdaivson K:\Jobs\990062-Holly Street\99006204\100 PERCENT\HOL-99006204-50R1.dwg SHEET D-1 100 %

Construction Notes:

- 1) Fencing: The existing chain link fence surrounding the Re-Store building storage yard shall be relocated along the perimeter of the Northern Landfill Unit project limits, as shown. The contractor shall establish a temporary fence separating the staging area from the Re-Store yard. Surplus fencing and gate from the existing relocated fence may be used for the temporary fencing. The temporary fence shall be parallel to and no closer than 50 feet from the existing building edge.
- 2) Salvage large woody debris and tree trunks from all clearing areas, for potential re-use.



CITY OF BELLINGHAM
OFFICE OF NEIGHBORHOODS
& COMMUNITY DEVELOPMENT


**HOLLY STREET
LANDFILL/WHATCOM
CREEK ESTUARY
RESTORATION**

DEMOLITION PLAN

DESIGNED PCH, MPW
DRAWN CVD
CHECKED CRP, GEG, EJB
SCALE AS NOTED
DATE FEBRUARY 2004

PAGE 4 OF 19

SHEET D-1



DRAFT FINAL 100% DESIGN SUBMITTAL
NOT FOR CONSTRUCTION