

APPENDIX 1 – Minimum Technical Requirements for New Development and Redevelopment

This Appendix is comprised of excerpts from the 2005 Stormwater Management Manual for Western Washington and the November, 2005 NPDES Stormwater General Permit for Construction Activities

NOTE:

Appendix 1 is applicable to any new development, redevelopment and construction site activities that result in a land disturbance of equal to or greater than one acre, including projects less than one acre that are part of a larger common plan of the development or sale.

The one acre threshold is defined as the “Regulatory Threshold.” If the one acre regulatory threshold applies, as described above, the “Technical Thresholds” in Appendix 1 are applicable

Exemptions

Forest practices:

Forest practices regulated under Title 222 WAC, except for Class IV General forest practices that are conversions from timber land to other uses, are exempt from the provisions of the minimum requirements.

Commercial agriculture:

Commercial agriculture practices involving working the land for production are generally exempt. However, the conversion from timberland to agriculture, and the construction of impervious surfaces are not exempt.

Road Maintenance:

The following road maintenance practices are exempt: pothole and square cut patching, overlaying existing asphalt or concrete pavement with asphalt or concrete without expanding the area of coverage, shoulder grading, reshaping/regrading drainage systems, crack sealing, resurfacing with in-kind material without expanding the road prism, and vegetation maintenance.

The following road maintenance practices are considered redevelopment, and therefore are not categorically exempt. The extent to which the manual applies is explained for each circumstance.

- Removing and replacing a paved surface to base course or lower, or repairing the roadway base: If impervious surfaces are not expanded, Minimum Requirements #1 - #5

apply. However, in most cases, only Minimum Requirement #2, Construction Stormwater Pollution Prevention, will be germane. Where appropriate, project proponents are encouraged to look for opportunities to use permeable and porous pavements.

- Extending the pavement edge without increasing the size of the road prism, or paving graveled shoulders: These are considered new impervious surfaces and are subject to the minimum requirements that are triggered when the thresholds identified for redevelopment projects are met.
- Resurfacing by upgrading from dirt to gravel, asphalt, or concrete; upgrading from gravel to asphalt, or concrete; or upgrading from a bituminous surface treatment (“chip seal”) to asphalt or concrete: These are considered new impervious surfaces and are subject to the minimum requirements that are triggered when the thresholds identified for redevelopment projects are met.

Underground utility projects:

Underground utility projects that replace the ground surface with in-kind material or materials with similar runoff characteristics are only subject to Minimum Requirement #2, Construction Stormwater Pollution Prevention.

All other new development is subject to one or more of the Minimum Requirements (see Section 2.4).

Definitions Related to Minimum Requirements

Arterial - A road or street primarily for through traffic. A major arterial connects an Interstate Highway to cities and counties. A minor arterial connects major arterials to collectors. A collector connects an arterial to a neighborhood. A collector is not an arterial. A local access road connects individual homes to a collector.

Certified Erosion and Sediment Control Lead (CESCL) - means an individual who has current certification through an approved erosion and sediment control training program that meets the minimum training standards established by the Department (see BMP C160 in the *Stormwater Management Manual for Western Washington* (2005)). A CESCL is knowledgeable in the principles and practices of erosion and sediment control. The CESCL must have the skills to assess site conditions and construction activities that could impact the quality of stormwater and, the effectiveness of erosion and sediment control measures used to control the quality of stormwater discharges. Certification is obtained through an Ecology approved erosion and sediment control course. Course listing are provided online at:

http://www.ecy.wa.gov/programs/wq/stormwater/certified_erosion_and_sediment_c.htm

Effective Impervious surface - Those impervious surfaces that are connected via sheet flow or discrete conveyance to a drainage system. Impervious surfaces on residential development sites are considered ineffective if the runoff is dispersed through at least one hundred feet of native

vegetation in accordance with BMP T5.30 – “Full Dispersion,” as described in Chapter 5 of Volume V.

Highway – A main public road connecting towns and cities

Impervious surface - A hard surface area that either prevents or retards the entry of water into the soil mantle as under natural conditions prior to development. A hard surface area which causes water to run off the surface in greater quantities or at an increased rate of flow from the flow present under natural conditions prior to development. Common impervious surfaces include, but are not limited to, roof tops, walkways, patios, driveways, parking lots or storage areas, concrete or asphalt paving, gravel roads, packed earthen materials, and oiled, macadam or other surfaces which similarly impede the natural infiltration of stormwater. Open, uncovered retention/detention facilities shall not be considered as impervious surfaces for purposes of determining whether the thresholds for application of minimum requirements are exceeded. Open, uncovered retention/detention facilities shall be considered impervious surfaces for purposes of runoff modeling.

Land disturbing activity - Any activity that results in movement of earth, or a change in the existing soil cover (both vegetative and non-vegetative) and/or the existing soil topography. Land disturbing activities include, but are not limited to clearing, grading, filling, and excavation. Compaction that is associated with stabilization of structures and road construction shall also be considered a land disturbing activity. Vegetation maintenance practices are not considered land-disturbing activity.

Maintenance - Repair and maintenance includes activities conducted on currently serviceable structures, facilities, and equipment that involves no expansion or use beyond that previously existing and results in no significant adverse hydrologic impact. It includes those usual activities taken to prevent a decline, lapse, or cessation in the use of structures and systems. Those usual activities may include and replacement of dysfunctioning facilities, including cases where environmental permits require replacing an existing structure with a different type structure, as long as the functioning characteristics of the original structure are not changed. One example is the replacement of a collapsed, fish blocking, round culvert with a new box culvert under the same span, or width, of roadway. For further details on the application of this manual to various road management functions, please see Section 2.2.

Native vegetation – Vegetation comprised of plant species, other than noxious weeds, that are indigenous to the coastal region of the Pacific Northwest and which reasonably could have been expected to naturally occur on the site. Examples include trees such as Douglas Fir, western hemlock, western red cedar, alder, big-leaf maple, and vine maple; shrubs such as willow, elderberry, salmonberry, and salal; and herbaceous plants such as sword fern, foam flower, and fireweed.

New development - Land disturbing activities, including Class IV -general forest practices that are conversions from timber land to other uses; structural development, including construction or installation of a building or other structure; creation of impervious surfaces; and subdivision, short subdivision and binding site plans, as defined and applied in Chapter 58.17 RCW. Projects meeting the definition of redevelopment shall not be considered new development.

Pollution-generating impervious surface (PGIS) - Those impervious surfaces considered to be a significant source of pollutants in stormwater runoff. Such surfaces include those which are subject to: vehicular use; industrial activities (as further defined in the glossary); or storage of erodible or leachable materials, wastes, or chemicals, and which receive direct rainfall or the run-on or blow-in of rainfall. Erodible or leachable materials, wastes, or chemicals are those substances which, when exposed to rainfall, measurably alter the physical or chemical characteristics of the rainfall runoff. Examples include erodible soils that are stockpiled, uncovered process wastes, manure, fertilizers, oily substances, ashes, kiln dust, and garbage dumpster leakage. Metal roofs are also considered to be PGIS unless they are coated with an inert, non-leachable material (e.g., baked-on enamel coating).

A surface, whether paved or not, shall be considered subject to vehicular use if it is regularly used by motor vehicles. The following are considered regularly-used surfaces: roads, unvegetated road shoulders, bike lanes within the traveled lane of a roadway, driveways, parking lots, unfenced fire lanes, vehicular equipment storage yards, and airport runways.

The following are not considered regularly-used surfaces: paved bicycle pathways separated from and not subject to drainage from roads for motor vehicles, fenced fire lanes, and infrequently used maintenance access roads.

Pollution-generating pervious surfaces (PGPS) - Any non-impervious surface subject to use of pesticides and fertilizers or loss of soil. Typical PGPS include lawns, landscaped areas, golf courses, parks, cemeteries, and sports fields.

Pre-developed condition – The native vegetation and soils that existed at a site prior to the influence of Euro-American settlement. The pre-developed condition shall be assumed to be a forested land cover unless reasonable, historic information is provided that indicates the site was prairie prior to settlement.

Project site - That portion of a property, properties, or right of way subject to land disturbing activities, new impervious surfaces, or replaced impervious surfaces.

Receiving waters - Bodies of water or surface water systems to which surface runoff is discharged via a point source of stormwater or via sheet flow.


Redevelopment - On a site that is already substantially developed (i.e., has 35% or more of existing impervious surface coverage), the creation or addition of impervious surfaces; the expansion of a building footprint or addition or replacement of a structure; structural development including construction, installation or expansion of a building or other structure;; replacement of impervious surface that is not part of a routine maintenance activity; and land disturbing activities.

Replaced impervious surface - For structures, the removal and replacement of any exterior impervious surfaces or foundation. For other impervious surfaces, the removal down to bare soil or base course and replacement.

Site – The area defined by the legal boundaries of a parcel or parcels of land that is (are) subject to new development or redevelopment. For road projects, the length of the project site and the right-of-way boundaries define the site.

Source control BMP - A structure or operation that is intended to prevent pollutants from coming into contact with stormwater through physical separation of areas or careful management of activities that are sources of pollutants. This manual separates source control BMPs into two types. *Structural Source Control BMPs* are physical, structural, or mechanical devices, or facilities that are intended to prevent pollutants from entering stormwater. *Operational BMPs* are non-structural practices that prevent or reduce pollutants from entering stormwater. See Volume IV for details.


Threshold Discharge Area - An onsite area draining to a single natural discharge location or multiple natural discharge locations that combine within one-quarter mile downstream (as determined by the shortest flowpath). The examples in Figure 2.1 below illustrate this definition. The purpose of this definition is to clarify how the thresholds of this manual are applied to project sites with multiple discharge points.

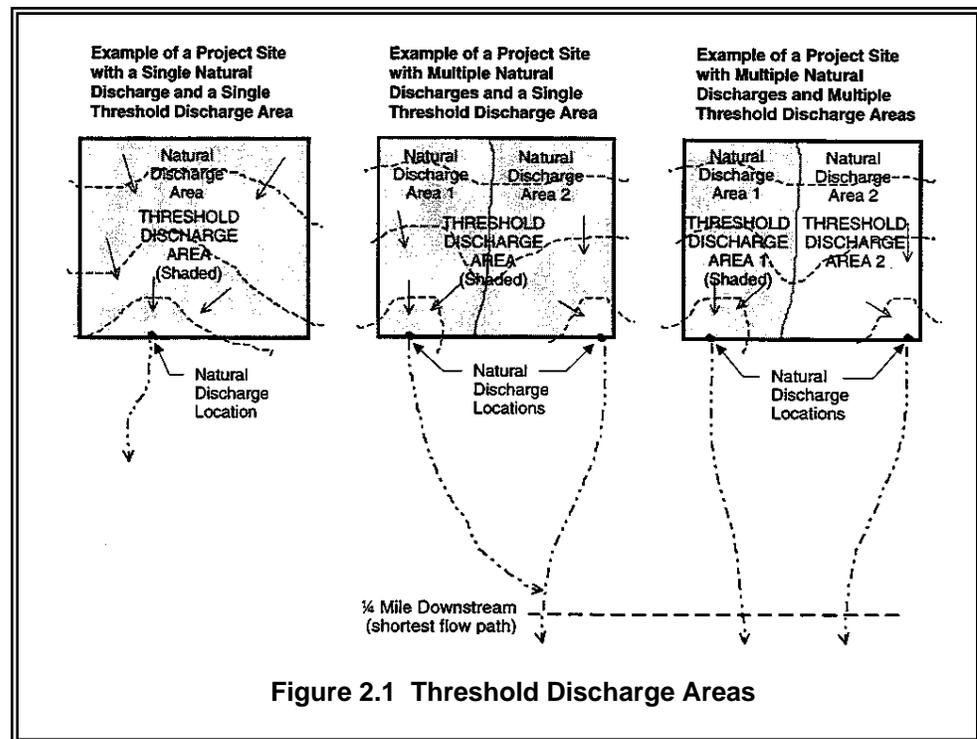

2.4 Applicability of the Minimum Requirements

Not all of the Minimum Requirements apply to every development or redevelopment project. The applicability varies depending on the type and size of the project. This

section identifies thresholds that determine the applicability of the Minimum Requirements to different projects. The flow charts in Figures 2.2 and 2.3 can be used to determine which requirements apply. The Minimum Requirements themselves are presented in Section 2.5.

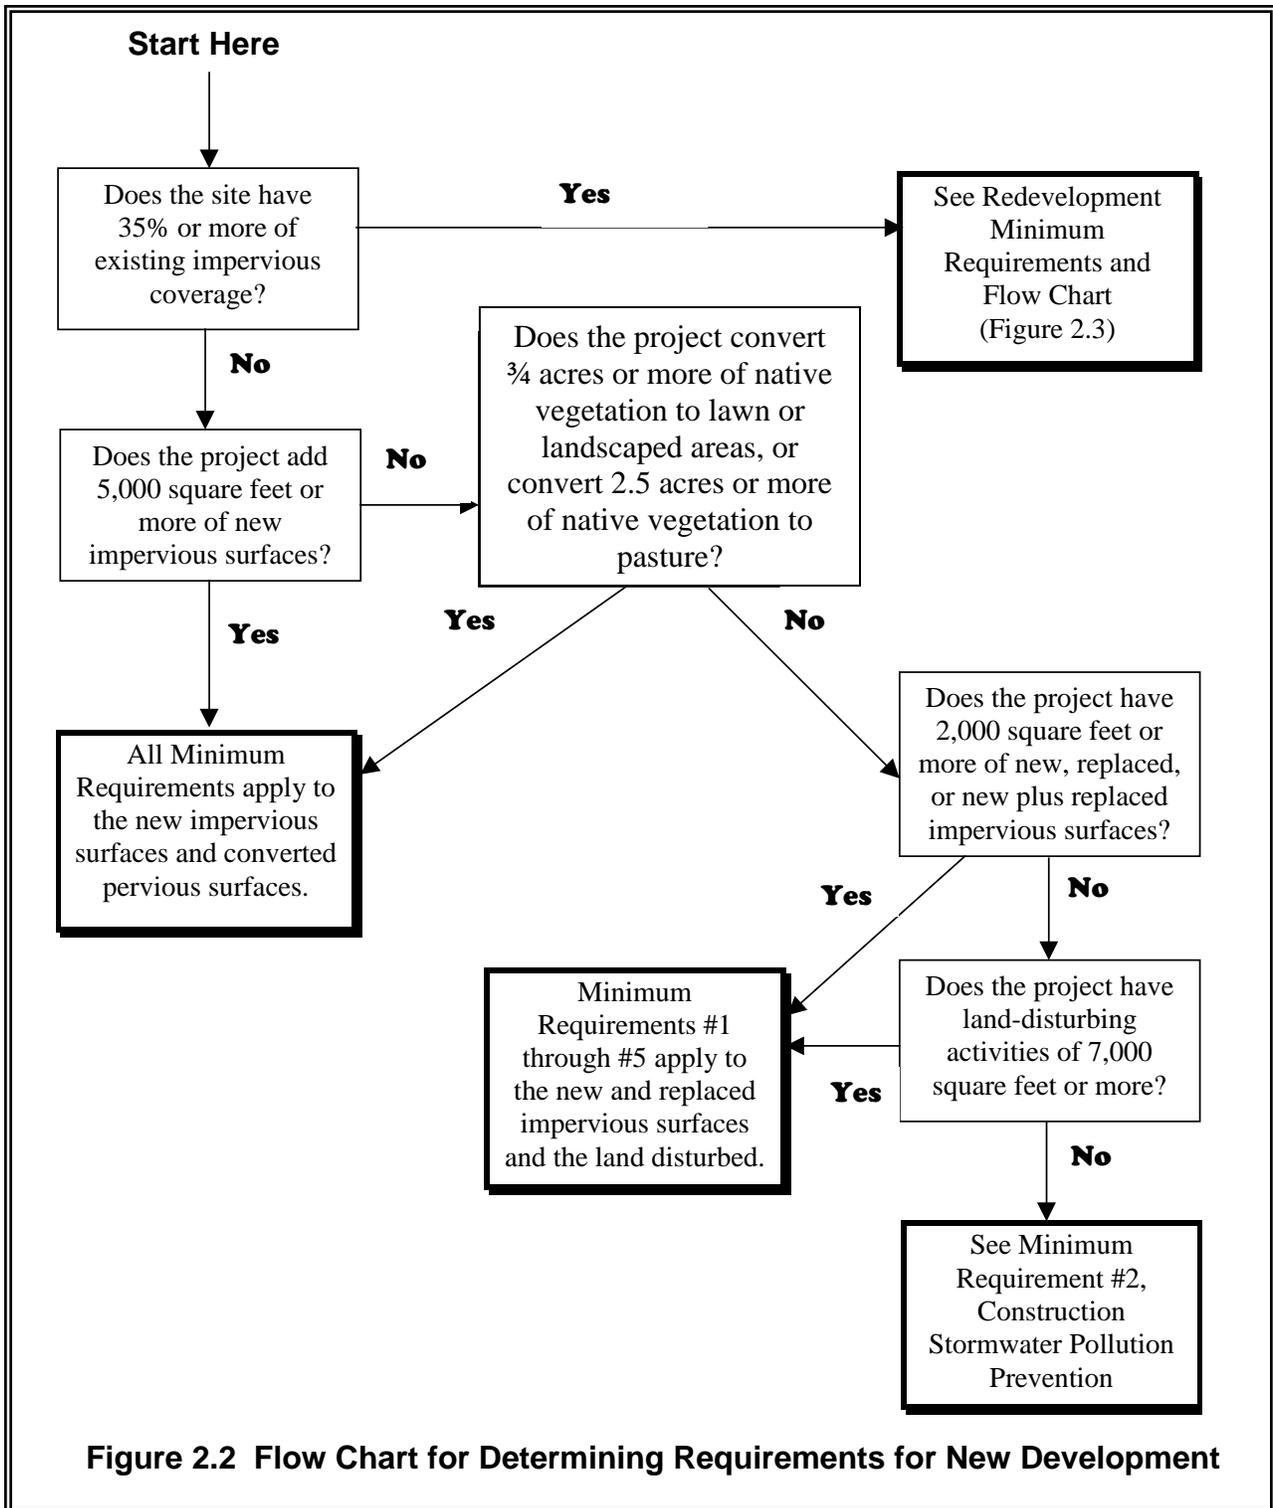

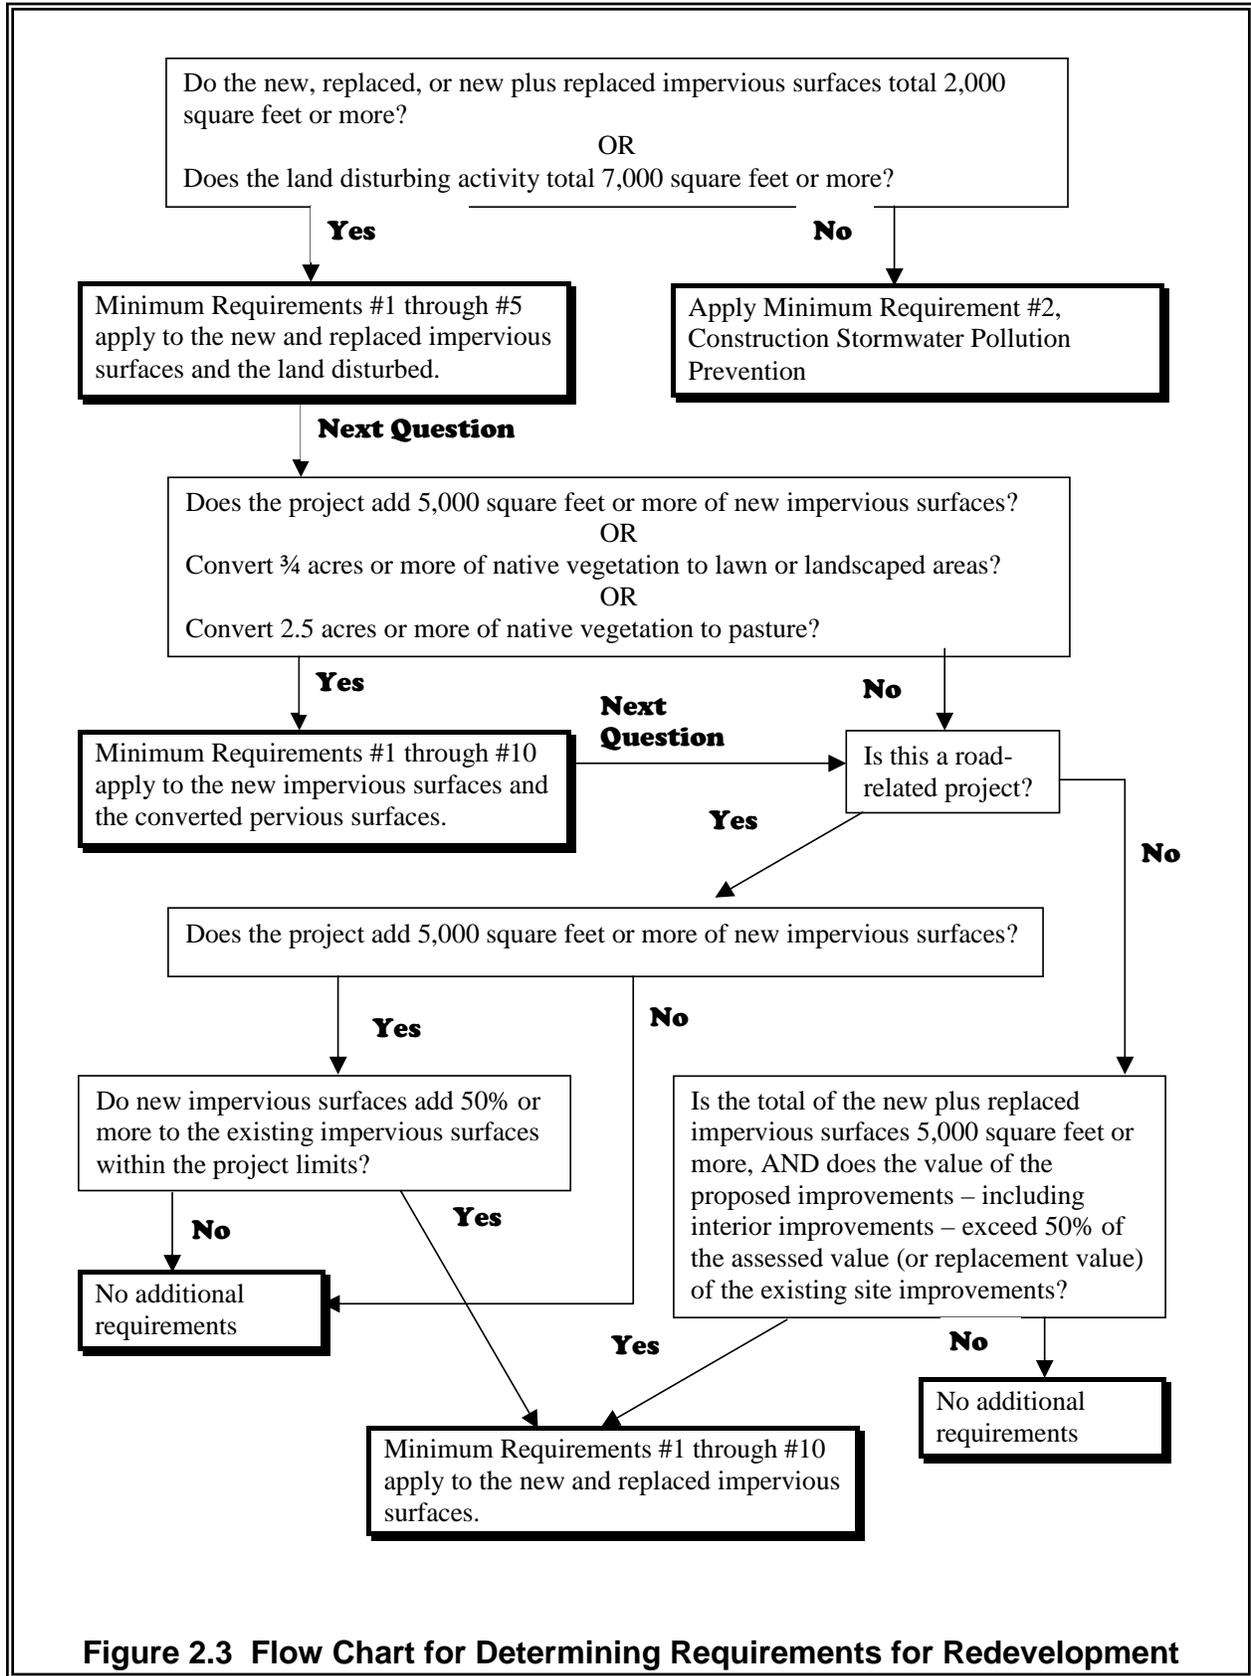


Figure 2.3 Flow Chart for Determining Requirements for Redevelopment

2.4.1 New Development

All new development shall be required to comply with Minimum Requirement #2.

The following new development shall comply with Minimum Requirements #1 through #5 for the new and replaced impervious surfaces and the land disturbed:

- Creates or adds 2,000 square feet, or greater, of new, replaced, or new plus replaced impervious surface area, or
- Has land disturbing activity of 7,000 square feet or greater,

The following new development shall comply with Minimum Requirements #1 through #10 for the new impervious surfaces and the converted pervious surfaces:

- Creates or adds 5,000 square feet, or more, of new impervious surface area, or
- Converts $\frac{3}{4}$ acres, or more, of native vegetation to lawn or landscaped areas, or
- Converts 2.5 acres, or more, of native vegetation to pasture.

2.4.2 Redevelopment

All redevelopment shall be required to comply with Minimum Requirement #2. In addition, all redevelopment that exceeds certain thresholds shall be required to comply with additional Minimum Requirements as follows.

The following redevelopment shall comply with Minimum Requirements #1 through #5 for the new and replaced impervious surfaces and the land disturbed:

- The new, replaced, or total of *new plus replaced* impervious surfaces is 2,000 square feet or more, or
- 7,000 square feet or more of land disturbing activities.

The following redevelopment shall comply with Minimum Requirements #1 through #10 for the new impervious surfaces and converted pervious areas:

- Adds 5,000 square feet or more of *new* impervious surfaces or,
- Converts $\frac{3}{4}$ acres, or more, of native vegetation to lawn or landscaped areas, or
- Converts 2.5 acres, or more, of native vegetation to pasture.

If the runoff from the new impervious surfaces and converted pervious surfaces is not separated from runoff from other surfaces on the project site, the stormwater treatment facilities must be sized for the entire flow that is directed to them.

The local government may allow the Minimum Requirements to be met for an equivalent (flow and pollution characteristics) area within the same site. For public roads' projects, the equivalent area does not have to be within the project limits, but must drain to the same receiving water.

Additional Requirements for the Project Site

For road-related projects, runoff from the replaced and new impervious surfaces (including pavement, shoulders, curbs, and sidewalks) shall meet all the Minimum Requirements if the new impervious surfaces total 5,000 square feet or more and total 50% or more of the existing impervious surfaces within the project limits. The project limits shall be defined by the length of the project and the width of the right-of-way.

Other types of redevelopment projects shall comply with all the Minimum Requirements for the new and replaced impervious surfaces if the total of new plus replaced impervious surfaces is 5,000 square feet or more, and the valuation of proposed improvements – including interior improvements – exceeds 50% of the assessed value of the existing site improvements.

A local government may exempt or institute a stop-loss provision for redevelopment projects from compliance with Minimum Requirements for treatment, flow control, and wetlands protection as applied to the replaced impervious surfaces if the local government has adopted a plan and a schedule that fulfills those requirements in regional facilities.

2.5 Minimum Requirements

Minimum Requirement #1: Preparation of Stormwater Site Plans

All projects meeting the thresholds in Section 2.4 shall prepare a Stormwater Site Plan for local government review. Stormwater Site Plans shall be prepared in accordance with Chapter 3 of this volume.

Minimum Requirement #2: Construction Stormwater Pollution Prevention (SWPP)

Requirements

All new development and redevelopment projects are responsible for preventing erosion and discharge of sediment and other pollutants into receiving waters. Projects meeting the Regulatory Threshold and not qualifying for an Erosivity Waiver as described at the end of this minimum requirement, if allowed by the local jurisdiction shall prepare a Construction Stormwater Pollution Prevention Plan (SWPPP) as part of the Stormwater Site Plan (see Minimum Requirement #1 above). The SWPPP shall be implemented beginning with initial soil disturbance and until final stabilization. The SWPPP shall meet the following objectives: (1) to implement BMPs to prevent erosion and

sedimentation, and to identify, reduce, eliminate or prevent stormwater contamination and water pollution from construction activity; (2) to prevent violations of surface water quality, ground water quality or sediment management standards; and (3) to control peak volumetric flow rates and velocities of stormwater discharges.

The SWPPP shall include a narrative and drawings. All BMPs shall be clearly referenced in the narrative and marked on the drawings. The SWPPP narrative shall include documentation to explain and justify the pollution prevention decisions made for the project. Documentation shall include: (1) information about existing site conditions (topography, drainage, soils, vegetation, etc.); (2) potential erosion problem areas; (3) the twelve elements of a SWPPP below, including BMPs used to address each element unless site conditions render the element unnecessary, and the exemption from that element is clearly justified; (4) construction phasing/sequence and general BMP implementation planning schedule; (5) the actions to be taken if BMP performance goals are not achieved; and (6) engineering calculations for ponds and any other designed structures.

Clearing and grading activities for developments shall be permitted only if conducted pursuant to an approved site development plan (e.g., subdivision approval) that establishes permitted areas of clearing, grading, cutting, and filling. When establishing these permitted clearing and grading areas, consideration should be given to minimizing removal of existing trees and minimizing disturbance/compaction of native soils except as needed for building purposes. These permitted clearing and grading areas and any other areas required to preserve critical or sensitive areas, buffers, native growth protection easements, or tree retention areas as may be required by local jurisdictions, shall be delineated on the site plans and the development site.

Seasonal Work Limitations - From October 1 through April 30, clearing, grading, and other soil disturbing activities shall only be permitted if shown to the satisfaction of the local permitting authority that silt-laden runoff will be prevented from leaving the site through a combination of the following:

1. Site conditions including existing vegetative coverage, slope, soil type and proximity to receiving waters; and
2. Limitations on activities and the extent of disturbed areas; and
3. Proposed erosion and sediment control measures.

Based on the information provided and/or local weather conditions, the local permitting authority may expand or restrict the seasonal limitation on site disturbance. The following activities are exempt from the seasonal clearing and grading limitations:

1. Routine maintenance and necessary repair of erosion and sediment control BMPs,
2. Routine maintenance of public facilities or existing utility structures that do not expose the soil or result in the removal of the vegetative cover to soil, and

3. Activities where there is one hundred percent infiltration of surface water runoff within the site in approved and installed erosion and sediment control facilities.

Stormwater BMPs shall be consistent with the 2005 *Stormwater Management Manual for Western Washington*, and/or other technical stormwater manuals approved by the Department.

Construction Stormwater Pollution Prevention Plan (SWPPP) Elements:

1. Preserve Vegetation/Mark Clearing Limits:

- a. Prior to beginning land disturbing activities, including clearing and grading, clearly mark all clearing limits, sensitive areas and their buffers, and trees that are to be preserved within the construction area.
- b. The duff layer, native top soil, and natural vegetation shall be retained in an undisturbed state to the maximum degree practicable.

2. Establish Construction Access:

- a. Construction vehicle access and exit shall be limited to one route, if possible.
- b. Access points shall be stabilized with quarry spalls, crushed rock or other equivalent BMP to minimize the tracking of sediment onto public roads.
- c. Wheel wash or tire baths shall be located on site, if the stabilized construction entrance is not effective in preventing sediment from being tracked onto public roads.
- d. If sediment is tracked off site, roads shall be cleaned thoroughly at the end of each day, or more frequently during wet weather. Sediment shall be removed from roads by shoveling or pickup sweeping and shall be transported to a controlled sediment disposal area.
- e. Street washing is allowed only after sediment is removed in accordance with 2.d, above. Street wash wastewater shall be controlled by pumping back on site or otherwise be prevented from discharging into systems tributary to waters of the state.

3. Control Flow Rates:

- a. Properties and waterways downstream from development sites shall be protected from erosion due to increases in the velocity and peak volumetric flow rate of stormwater runoff from the project site, as required by the municipality.
- b. Where necessary to comply with 3.a, above, stormwater retention or detention facilities shall be constructed as one of the first steps in grading. Detention

facilities shall be functional prior to construction of site improvements (*e.g.*, impervious surfaces).

- c. If permanent infiltration ponds are used for flow control during construction, these facilities should be protected from siltation during the construction phase.

4. Install Sediment Controls:

- a. Stormwater runoff from disturbed areas shall pass through a sediment pond, or other appropriate sediment removal BMP, prior to leaving a construction site or prior to discharge to an infiltration facility. Runoff from fully stabilized areas may be discharged without a sediment removal BMP, but shall meet the flow control performance standard of 3.a, above.
- b. Sediment control BMPs (sediment ponds, traps, filters, etc.) shall be constructed as one of the first steps in grading. These BMPs shall be functional before other land disturbing activities take place.
- c. BMPs intended to trap sediment on site shall be located in a manner to avoid interference with the movement of juvenile salmonids attempting to enter off-channel areas or drainages.

5. Stabilize Soils:

- a. Exposed and unworked soils shall be stabilized by application of effective BMPs that prevent erosion. Applicable BMP's include but are not limited to: temporary and permanent seeding, sodding, mulching, plastic covering, erosion control fabrics and matting, soil application of polyacrylamide (PAM), the early application of gravel base on areas to be paved, and dust control.
- b. Depending on the geographic location of the project, no soils should remain exposed and unworked for more than the time periods set forth below to prevent erosion:
 - During the dry season (May 1 – September 30): 7 days
 - During the wet season (October 1 – April 30): 2 days
- c. The time period may be adjusted by the municipality, if the municipality can show that local precipitation data justify a different standard.
- d. Soils shall be stabilized at the end of the shift before a holiday or weekend if needed based on the weather forecast.
- e. Soil stockpiles must be stabilized from erosion, protected with sediment trapping measures, and where possible, be located away from storm drain inlets, waterways and drainage channels.

6. Protect Slopes:

- a. Design and construct cut and fill slopes in a manner that will minimize erosion. Reduce slope runoff velocities by terracing, reducing slope steepness, and roughening slope surfaces.
- b. Off-site stormwater (run-on) or groundwater shall be diverted away from slopes and undisturbed areas with interceptor dikes, pipes and/or swales. Off-site stormwater should be managed separately from stormwater generated on the site.
- c. At the top of slopes, collect drainage in pipe slope drains or protected channels to prevent erosion. Temporary pipe slope drains shall handle the expected peak 10-minute flow velocity from a Type 1A, 10-year, 24-hour frequency storm for the developed condition. Alternatively, the 10-year, 1-hour flow rate predicted by an approved continuous runoff model, increased by a factor of 1.6, may be used. The hydrologic analysis shall use the existing land cover condition for predicting flow rates from tributary areas outside the project limits. For tributary areas on the project site, the analysis shall use the temporary or permanent project land cover condition, whichever will produce the highest flow rates. If using the WWHM to predict flows, bare soil areas should be modeled as “landscaped area.”
- d. Excavated material shall be placed on the uphill side of trenches, consistent with safety and space considerations.
- e. Check dams shall be placed at regular intervals within constructed channels that are cut down a slope.

7. Protect Drain Inlets:

- a. Storm drain inlets made operable during construction shall be protected so that stormwater runoff does not enter the conveyance system without first being filtered or treated to remove sediment.
- b. Inlet protection devices shall be cleaned or removed and replaced when sediment has filled one-third of the available storage (unless a different standard is specified by the product manufacturer).

8. Stabilize Channels and Outlets:

- a. All temporary on-site conveyance channels shall be designed, constructed, and stabilized to prevent erosion from the following expected peak flows. Channels shall handle the expected peak 10-minute flow velocity from a Type 1A, 10-year, 24-hour frequency storm for the developed condition. Alternatively, the 10-year, 1-hour flow rate predicted by an approved continuous runoff model, increased by a factor of 1.6, may be used. The hydrologic analysis shall use the existing land cover condition for predicting flow rates from tributary areas outside the project limits. For tributary areas on the project site, the analysis shall use the temporary or permanent project land cover condition, whichever

will produce the highest flow rates. If using the WWHM to predict flows, bare soil areas should be modeled as “landscaped area.”

- b. Stabilization, including armoring material, adequate to prevent erosion of outlets, adjacent stream banks, slopes, and downstream reaches shall be provided at the outlets of all conveyance systems.

9. Control Pollutants:

- a. All pollutants, including waste materials and demolition debris, that occur onsite shall be handled and disposed of in a manner that does not cause contamination of stormwater.
- b. Cover, containment, and protection from vandalism shall be provided for all chemicals, liquid products, petroleum products, and other materials that have the potential to pose a threat to human health or the environment. On-site fueling tanks shall include secondary containment.
- c. Maintenance, fueling and repair of heavy equipment and vehicles shall be conducted using spill prevention and control measures. Contaminated surfaces shall be cleaned immediately following any spill incident.
- d. Wheel wash or tire bath wastewater shall be discharged to a separate on-site treatment system or to the sanitary sewer with local sewer district approval.
- e. Application of fertilizers and pesticides shall be conducted in a manner and at application rates that will not result in loss of chemical to stormwater runoff. Manufacturers’ label requirements for application rates and procedures shall be followed.
- f. BMPs shall be used to prevent or treat contamination of stormwater runoff by pH modifying sources. These sources include, but are not limited to: bulk cement, cement kiln dust, fly ash, new concrete washing and curing waters, waste streams generated from concrete grinding and sawing, exposed aggregate processes, dewatering concrete vaults, concrete pumping and mixer washout waters. The construction site operator shall adjust the pH of stormwater if necessary to prevent violations of water quality standards.
- g. Construction site operators shall obtain written approval from the Department prior to using chemical treatment other than CO₂ or dry ice to adjust pH.

10. Control De-Watering:

- a. Foundation, vault, and trench de-watering water, which have similar characteristics to stormwater runoff at the site, shall be discharged into a controlled conveyance system prior to discharge to a sediment trap or sediment pond.
- b. Clean, non-turbid de-watering water, such as well-point ground water, can be discharged to systems tributary to, or directly into surface waters of the state, as specified in 8, above, provided the de-watering flow does not cause erosion or flooding of receiving

waters. Clean de-watering water should not be routed through stormwater sediment ponds.

- c. Other de-watering disposal options may include: (i) infiltration; (ii) transport offsite in vehicle, such as a vacuum flush truck, for legal disposal in a manner that does not pollute state waters; (iii) on-site chemical treatment or other suitable treatment technologies approved by the Permittee; (iv) sanitary sewer discharge with local sewer district approval, if there is no other option; or (v) use of a sedimentation bag with outfall to a ditch or swale for small volumes of localized de-watering.
- d. Highly turbid or contaminated dewatering water shall be handled separately from stormwater.

11. Maintain BMPs:

- a. All temporary and permanent erosion and sediment control BMPs shall be inspected, maintained and repaired as needed to assure continued performance of their intended function in accordance with BMP specifications.
- b. All temporary erosion and sediment control BMPs shall be removed within 30 days after final site stabilization is achieved or after the temporary BMPs are no longer needed.

12. Manage the Project:

- a. Development projects shall be phased where feasible to prevent soil erosion and, to the maximum degree practicable, the transport of sediment from the site during construction.
- b. For construction sites disturbing one acre or more: Site inspections shall be conducted by a Certified Erosion and Sediment Control Lead who shall be identified in the SWPPP and shall be present on-site or on-call at all times.

13. The SWPPP shall be maintained, updated, and implemented in accordance with the following:

- a. Based on the results of the inspection, the construction site operator shall correct the problems identified as follows: The construction site operator shall modify the SWPPP if, during inspections or investigations conducted by the owner/operator, by the municipality, or by the Department, it is determined that the SWPPP is, or would be, ineffective in eliminating or significantly minimizing pollutants in stormwater discharges from the site. The operator shall take the following actions:
 - Review the SWPPP for compliance with this Minimum Requirement and make appropriate revisions within 7 days of the inspection or investigation; and
 - Implement and maintain appropriate source control and/or treatment BMPs as soon as possible.

- b. The construction site operator shall modify the SWPPP whenever there is a change in design, construction, operation, or maintenance at the construction site that has, or could have, a significant effect on the discharge of pollutants to waters of the state.

Erosivity Waiver

Local jurisdictions may choose to allow the use of an “Erosivity Waiver” for qualifying projects disturbing less than five acres. If local jurisdictions allow the use of the Erosivity Waiver such projects would be waived from the requirement to submit to the local jurisdiction SWPPP’s for review. Operators may qualify for a waiver from the requirement to submit a SWPPP if the following conditions are met:

1. The site will result in the disturbance of less than 5 acres; and the site is not a portion of a common plan of development or sale that will disturb 5 acres or greater; and
2. The project’s rainfall erosivity factor (“R” Factor) is less than 5 during the period of construction activity, as calculated using the Texas A&M University online rainfall erosivity calculator at: <http://ei.tamu.edu/>. The period of construction activity begins at initial earth disturbance and ends with final stabilization; and
3. The entire period of construction activity falls between June 15 and September 15; and
4. The site or facility has not been declared a significant contributor of pollutants; and
5. There are no planned construction activities at the site that will result in non-stormwater discharges; and
6. A waiver is allowed by the local jurisdiction; and

Construction site operators must notify the local jurisdiction of the intention to apply this waiver at least one week prior to commencing land disturbing activities. The waiver must include a certified statement that:

1. The operator will comply with applicable local stormwater requirements; and
2. The operator will implement appropriate erosion and sediment control BMPs to prevent violations of water quality standards.

Minimum Requirement #3: Source Control of Pollution

All known, available and reasonable source control BMPs shall be applied to all projects. Source control BMPs shall be selected, designed, and maintained according to this manual.

Minimum Requirement #4: Preservation of Natural Drainage Systems and Outfalls

Natural drainage patterns shall be maintained, and discharges from the project site shall occur at the natural location, to the maximum extent practicable. The manner by which runoff is discharged from the project site must not cause a significant adverse impact to downstream receiving waters and downgradient properties. All outfalls require energy dissipation.

Minimum Requirement #5: On-site Stormwater Management

Projects shall employ On-site Stormwater Management BMPs to infiltrate, disperse, and retain stormwater runoff onsite to the maximum extent feasible without causing flooding or erosion impacts. Roof Downspout Control BMPs, functionally equivalent to those described in Chapter 3 of Volume III, and Dispersion and Soil Quality BMPs, functionally equivalent to those in Chapter 5 of Volume V, shall be required to reduce the hydrologic disruption of developed sites.

Minimum Requirement #6: Runoff Treatment

Project Thresholds

The following require construction of stormwater treatment facilities (see Table 2.1):

- Projects in which the total of effective, pollution-generating impervious surface (PGIS) is 5,000 square feet or more in a threshold discharge area of the project, or
- Projects in which the total of pollution-generating pervious surfaces (PGPS) is three-quarters (3/4) of an acre or more in a threshold discharge area, and from which there is a surface discharge in a natural or man-made conveyance system from the site.

	< ¾ acres of PGPS	≥ ¾ acres PGPS	< 5,000 sf PGIS	≥ 5,000 sf PGIS
Treatment Facilities		✓		✓
Onsite Stormwater BMPs	✓	✓	✓	✓

PGPS = pollution-generating pervious surfaces
 PGIS = pollution-generating impervious surfaces
 sf = square feet

Treatment-Type Thresholds

Oil Control:

Treatment to achieve Oil Control applies to projects that have “high-use sites.” High-use sites are those that typically generate high concentrations of oil due to high traffic turnover or the frequent transfer of oil. High-use sites include:

- 1) An area of a commercial or industrial site subject to an expected average daily traffic (ADT) count equal to or greater than 100 vehicles per 1,000 square feet of gross building area;
- 2) An area of a commercial or industrial site subject to petroleum storage and transfer in excess of 1,500 gallons per year, not including routinely delivered heating oil;
- 3) An area of a commercial or industrial site subject to parking, storage or maintenance of 25 or more vehicles that are over 10 tons gross weight (trucks, buses, trains, heavy equipment, etc.);
- 4) A road intersection with a measured ADT count of 25,000 vehicles or more on the main roadway and 15,000 vehicles or more on any intersecting roadway, excluding projects proposing primarily pedestrian or bicycle use improvements.

Phosphorus Treatment:

The requirement to provide phosphorous control is determined by the local government with jurisdiction (e.g., through a lake management plan), or the Department of Ecology (e.g, through a waste load allocation). The local government may have developed a management plan and implementing ordinances or regulations for control of phosphorus from new/redevelopment for the receiving water(s) of the stormwater drainage. The local government can use the following sources of information for pursuing plans and implementing ordinances and/or regulations:

- 1) Those waterbodies reported under section 305(b) of the Clean Water Act, and designated as not supporting beneficial uses due to phosphorous;
- 2) Those listed in Washington State's Nonpoint Source Assessment required under section 319(a) of the Clean Water Act due to nutrients.

Enhanced Treatment:

Enhanced treatment for reduction in dissolved metals is required for the following project sites that discharge to fish-bearing streams, lakes, or to waters or conveyance systems tributary to fish-bearing streams or lakes:

Industrial project sites,
Commercial project sites,
Multi-family project sites, and

High AADT roads as follows:

Within Urban Growth Management Areas:

- Fully controlled and partially controlled limited access highways with Annual Average Daily Traffic (AADT) counts of 15,000 or more
- All other roads with an AADT of 7,500 or greater

Outside of Urban Growth Management Areas:

- Roads with an AADT of 15,000 or greater unless discharging to a 4th Strahler order stream or larger;
- Roads with an AADT of 30,000 or greater if discharging to a 4th Strahler order stream or larger (as determined using 1:24,000 scale maps to delineate stream order).

However, such sites listed above that discharge directly (or, indirectly through a municipal storm sewer system) to Basic Treatment Receiving Waters (Appendix I-C of the SMMWW), and areas of the above-listed project sites that are identified as subject to Basic Treatment requirements, are also not subject to Enhanced Treatment requirements. For developments with a mix of land use types, the Enhanced Treatment requirement shall apply when the runoff from the areas subject to the Enhanced Treatment requirement comprise 50% or more of the total runoff within a threshold discharge area.

Basic Treatment:

Basic Treatment generally applies to:

- Project sites that discharge to the ground, UNLESS:
 - 1) The soil suitability criteria for infiltration treatment are met (use infiltration treatment; see Chapter 3 of Volume III of the SMMWW), or
 - 2) The project uses infiltration strictly for flow control – not treatment - and the discharge is within ¼-mile of a phosphorus sensitive lake (use a Phosphorus Treatment facility), or within ¼ mile of a fish-bearing stream, or a lake (use an Enhanced Treatment facility).
- Residential projects not otherwise needing phosphorus control as designated by USEPA, the Department of Ecology, or a local government; and
- Project sites discharging directly to salt waters, river segments, and lakes listed in Appendix I-C of the SMMWW; and
- Project sites that drain to streams that are not fish-bearing, or to waters not tributary to fish-bearing streams;
- Landscaped areas of industrial, commercial, and multi-family project sites, and parking lots of industrial and commercial project sites that do not involve pollution-generating sources (e.g., industrial activities, customer parking, storage of erodible or leachable material, wastes or chemicals) other than parking of employees' private vehicles. For developments with a mix of land use types, the Basic Treatment requirement shall apply when the runoff from the areas subject to the Basic Treatment requirement comprise 50% or more of the total runoff within a threshold discharge area.

Treatment Facility Sizing

Water Quality Design Storm Volume: The volume of runoff predicted from a 24-hour storm with a 6-month return frequency (a.k.a., 6-month, 24-hour storm). Wetpool facilities are sized based upon the volume of runoff predicted through use of the Natural Resource Conservation Service curve number equations in Chapter 2 of Volume III, for the 6-month, 24-hour storm. Alternatively, the 91st percentile, 24-hour runoff volume indicated by an approved continuous runoff model may be used.

Water Quality Design Flow Rate

- ***Preceding Detention Facilities or when Detention Facilities are not required:*** The flow rate at or below which 91% of the runoff volume, as estimated by an approved continuous runoff model, will be treated. Design criteria for treatment facilities are assigned to achieve the applicable performance goal at the water quality design flow rate (e.g., 80% TSS removal).
- ***Downstream of Detention Facilities:*** The full 2-year release rate from the detention facility.

Alternative methods can be used if they identify volumes and flow rates that are at least equivalent.

That portion of any development project in which the above PGIS or PGPS thresholds are not exceeded in a threshold discharge area shall apply On-site Stormwater Management BMPs in accordance with Minimum Requirement #5.

Treatment Facility Selection, Design, and Maintenance

Stormwater treatment facilities shall be:

- selected in accordance with the process identified in Chapter 4 of Volume I,
- designed in accordance with the design criteria in Volume V, and
- maintained in accordance with the maintenance schedule in Volume V.

Additional Requirements

Direct discharge of untreated stormwater from pollution-generating impervious surfaces to ground water is prohibited, except for the discharge achieved by infiltration or dispersion of runoff from residential sites through use of On-site Stormwater Management BMPs.

Minimum Requirement #7: Flow Control

Applicability

Projects must provide flow control to reduce the impacts of stormwater runoff from impervious surfaces and land cover conversions. The requirement below applies to projects that discharge stormwater directly, or indirectly through a conveyance system, into a fresh water - except for projects that discharge to a water in Appendix I-E - Flow Control-Exempt Receiving Waters in accordance with the following restrictions:

- Direct discharge to the exempt receiving water does not result in the diversion of drainage from any perennial stream classified as Types 1, 2, 3, or 4 in the State of Washington Interim Water Typing System, or Types “S”, “F”, or “Np” in the Permanent Water Typing System, or from any category I, II, or III wetland; and
- Flow splitting devices or drainage BMP’s are applied to route natural runoff volumes from the project site to any downstream Type 5 stream or category IV wetland:
 - Design of flow splitting devices or drainage BMP’s will be based on continuous hydrologic modeling analysis. The design will assure that flows delivered to Type 5 stream reaches will approximate, but in no case exceed, durations ranging from 50% of the 2-year to the 50-year peak flow.
 - Flow splitting devices or drainage BMP’s that deliver flow to category IV wetlands will also be designed using continuous hydrologic modeling to preserve pre-project wetland hydrologic conditions unless specifically waived or exempted by regulatory agencies with permitting jurisdiction; and
- The project site must be drained by a conveyance system that is comprised entirely of manmade conveyance elements (e.g., pipes, ditches, outfall protection, etc.) and extends to the ordinary high water line of the exempt receiving water; and
- The conveyance system between the project site and the exempt receiving water shall have sufficient hydraulic capacity to convey discharges from future build-out conditions (under current zoning) of the site, and the existing condition from non-project areas from which runoff is or will be collected; and
- Any erodible elements of the manmade conveyance system must be adequately stabilized to prevent **erosion under the conditions noted above.**

If the discharge is to a stream that leads to a wetland, or to a wetland that has an outflow to a stream, both this requirement and Minimum Requirement #8 apply.

Local governments may petition Ecology to exempt projects in additional areas. A petition must justify the proposed exemption based upon a hydrologic analysis that demonstrates that the potential stormwater runoff from the exempted area will not significantly increase the erosion forces on the stream channel nor have near field impacts.

Thresholds

The following require construction of flow control facilities and/or land use management BMPs that will achieve the standard requirement for western Washington (see Table 2.2):

- Projects in which the total of effective impervious surfaces is 10,000 square feet or more in a threshold discharge area, or
- Projects that convert ¾ acres or more of native vegetation to lawn or landscape, or convert 2.5 acres or more of native vegetation to pasture in a threshold discharge area, and from which there is a surface discharge in a natural or man-made conveyance system from the site, or
- Projects that through a combination of effective impervious surfaces and converted pervious surfaces cause a 0.1 cubic feet per second increase in the 100-year flow frequency from a threshold discharge area as estimated using the Western Washington Hydrology Model or other approved model.

That portion of any development project in which the above thresholds are not exceeded in a threshold discharge area shall apply Onsite Stormwater Management BMPs in accordance with Minimum Requirement #5.

Table 2.2 Flow Control Requirements by Threshold Discharge Area		
	Flow Control Facilities	On-site Stormwater Management BMPs
< ¾ acres conversion to lawn/landscape, or < 2.5 acres to pasture		✓
≥ ¾ acres conversion to lawn/landscape, or > 2.5 acres to pasture	✓	✓
< 10,000 square feet of effective impervious area		✓
≥ 10,000 square feet of effective impervious area	✓	✓
≥ 0.1 cubic feet per second increase in the 100-year flood frequency	✓	✓

Standard Requirement

The following requirement applies to the geographic areas west of the Cascades, including all of the following counties:

Clallam	Jefferson	Pacific	Snohomish
Clark	King	Pierce	Thurston
Cowlitz	Kitsap	San Juan	Wahkiakum
Grays Harbor	Lewis	Skagit	Whatcom
Island	Mason	Skamania	

Stormwater discharges shall match developed discharge durations to pre-developed durations for the range of pre-developed discharge rates from 50% of the 2-year peak flow up to the full 50-year peak flow. The pre-developed condition to be matched shall be a forested land cover unless:

- 1) reasonable, historic information is provided that indicates the site was prairie prior to settlement (modeled as “pasture” in the Western Washington Hydrology Model); or,
- 2) the drainage area of the immediate stream and all subsequent downstream basins have had at least 40% total impervious area since 1985. In this case, the pre-developed condition to be matched shall be the existing land cover condition. Where basin-specific studies determine a stream channel to be unstable, even though the above criterion is met, the pre-developed condition assumption shall be the “historic” land cover condition, or a land cover condition commensurate with achieving a target flow regime identified by an approved basin study.

This standard requirement is waived for sites that will reliably infiltrate all the runoff from impervious surfaces and converted pervious surfaces.

Western Washington Alternative Requirement

An alternative requirement may be established through application of watershed-scale hydrological modeling and supporting field observations. Possible reasons for an alternative flow control requirement include:

- Establishment of a stream-specific threshold of significant bedload movement other than the assumed 50% of the 2-year peak flow;
- Zoning and Land Clearing Ordinance restrictions that, in combination with an alternative flow control standard, maintain or reduce the naturally occurring erosive forces on the stream channel; or
- A duration control standard is not necessary for protection, maintenance, or restoration of designated beneficial uses or Clean Water Act compliance.

Additional Requirement

Flow Control BMPs shall be selected, designed, and maintained according to a local government manual deemed equivalent to this manual.

Minimum Requirement #8: Wetlands Protection

Applicability

The requirements below apply only to projects whose stormwater discharges into a wetland, either directly or indirectly through a conveyance system. These requirements must be met in addition to meeting Minimum Requirement #6, Runoff Treatment.

Thresholds

The thresholds identified in Minimum Requirement #6 – Runoff Treatment, and Minimum Requirement #7 – Flow Control shall also be applied for discharges to wetlands.

Standard Requirement

Discharges to wetlands shall maintain the hydrologic conditions, hydrophytic vegetation, and substrate characteristics necessary to support existing and designated uses. The hydrologic analysis shall use the existing land cover condition to determine the existing hydrologic conditions unless directed otherwise by a regulatory agency with jurisdiction. A wetland can be considered for hydrologic modification and/or stormwater treatment in accordance with Guide Sheet 1B in Appendix I-D.

Additional Requirements

The standard requirement does not excuse any discharge from the obligation to apply whatever technology is necessary to comply with state water quality standards, Chapter 173-201A WAC, or state ground water standards, Chapter 173-200 WAC. Additional treatment requirements to meet those standards may be required by federal, state, or local governments.

Stormwater treatment and flow control facilities shall not be built within a natural vegetated buffer, except for:

- necessary conveyance systems as approved by the local government; or
- as allowed in wetlands approved for hydrologic modification and/or treatment in accordance with Guidesheet 1B.

An adopted and implemented basin plan (Minimum Requirement #9), or a Total Maximum Daily Load (TMDL, also known as a Water Clean-up Plan) may be used to develop requirements for wetlands that are tailored to a specific basin.

Minimum Requirement #9: Basin/Watershed Planning

Projects may be subject to equivalent or more stringent minimum requirements for erosion control, source control, treatment, and operation and maintenance, and alternative requirements for flow control and wetlands hydrologic control as identified in Basin/Watershed Plans. Basin/Watershed plans shall evaluate and include, as necessary, retrofitting urban stormwater BMPs into existing development and/or redevelopment in order to achieve watershed-wide pollutant reduction and flow control goals that are consistent with requirements of the federal Clean Water Act. Standards developed from basin plans shall not modify any of the above minimum requirements until the basin plan is formally adopted and implemented by the local governments within the basin, and approved or concurred with by Ecology.

Minimum Requirement #10: Operation and Maintenance

An operation and maintenance manual that is consistent with the provisions in Volume V of this manual shall be provided for all proposed stormwater facilities and BMPs, and the party (or parties) responsible for maintenance and operation shall be identified. At private facilities, a copy of the manual shall be retained onsite or within reasonable access to the site, and shall be transferred with the property to the new owner. For public facilities, a copy of the manual shall be retained in the appropriate department. A log of maintenance activity that indicates what actions were taken shall be kept and be available for inspection by the local government.

2.7 Adjustments

Adjustments to the Minimum Requirements may be granted prior to permit approval and construction. The drainage manual administrator of the local government may grant an adjustment provided that a written finding of fact is prepared, that addresses the following:

- The adjustment provides substantially equivalent environmental protection.
- The objectives of safety, function, environmental protection and facility maintenance, based upon sound engineering, are met.

2.8 Exceptions/Variations

Exceptions to the Minimum Requirements may be granted prior to permit approval and construction. The drainage manual administrator of the local government may grant an exception following legal public notice of an application for an exception, legal public notice of the administrator's decision on the application, and a written finding of fact that documents the following:

- There are special physical circumstances or conditions affecting the property such that the strict application of these provisions would deprive the applicant of all reasonable use of the parcel of land in question, and every effort to find creative ways to meet the intent of the Minimum Requirements has been made; and

- That the granting of the exception will not be detrimental to the public health and welfare, nor injurious to other properties in the vicinity and/or downstream, and to the quality of waters of the state; and
- The exception is the least possible exception that could be granted to comply with the intent of the Minimum Requirements.